



The AI can hear you



Wireless and Limitless Possibilities

Smart, Energy Saving, Security, Caring, Livable

What is smart ?

It is wireless connection, wireless connection,
no contact, no burden, no cost.

Artificial Intelligence



Service Hotline

Dongguan : +8613826995493

Taipei : +886910232715

www.wellshin.com.tw



Scan QR CODE
Download
SmartBears APP



Apple App Store



Google play

Five Years Warranty

Anytime

Anywhere

Anyhow

Home is with you



Special announcement : Our smart products are wireless control, which may cause misjudgment action due to signal interference or loss. Pay attention to this disclaimer with thanks!



SmartBears Product Features	4
PATRON Surveillance & Control Center	10
VOICE Voice Control	16
SENSOR Access Control	22
TOUCH Wireless Control Switch & Plug	29
DISON Wireless Control Dimmable LED	38
MUZ Wireless Control Lighting & Audio Bluetooth Speaker	43
CONTROL Environment Control	47
MEDICAL Medical Care	57
Smart speaker accessories support	59
Add-on type IR voice control remoter	67

4 Types of Control




Mobile APP Control

Remote control with your mobile phone.
Monitoring and setting other devices at the same time.



Manual Control

All SmartBears products can use
manual control when without mobile phone.

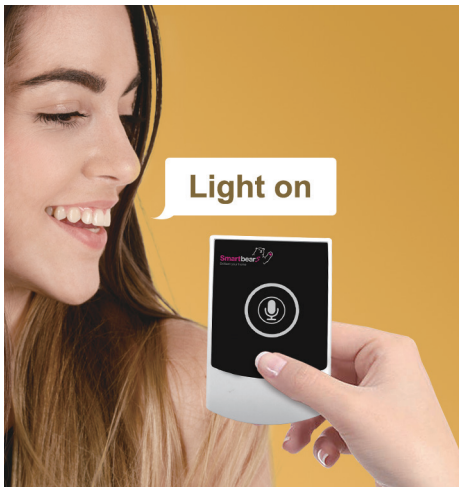

Voice Control


Voice control all devices.



Sensor Control

Immediate action when sensing any motions,
sensor control will turn on your set scene,
e.g. turn on the light, curtain and TV when you arrive home.


8 Features

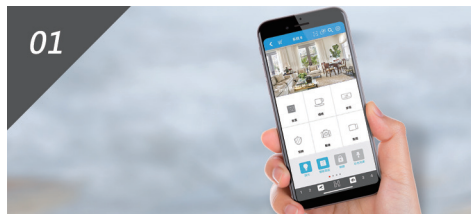

01

Immediate & Integrated Operation

Combine the camera surveillance footage with all associated device operation interfaces, reducing the operation conversion between monitoring screen and APP

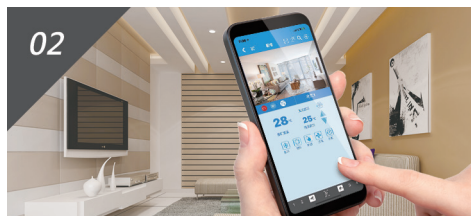

02

Built-in Infrared Control


Controllable infrared appliances TV,air Conditioner,Fan



03

Emergency & Security Notification

When the alarm is triggered, the hub sends a message to the user.

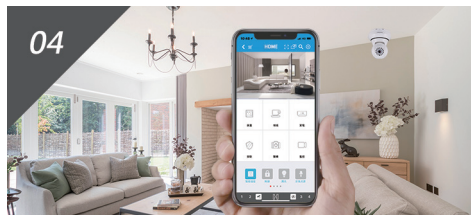

04

Wireless Connection

Convenient, Safe and Easy



05

Multiple Scene Mode

Definition Scene mode : Arm 、 Disarm 、 All on 、 All off

Custom Scene mode : go home 、 Go out 、 sleep 、 Meeting 、 Office



06

Mobile , Voice & Touch Control 3 in 1


User-friendly system design



07

Patent & Technical Innovation

Patent No : M491791

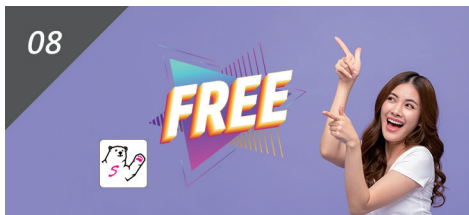


08

Care-free

Free monthly rent, maintenance free

Smart System Application

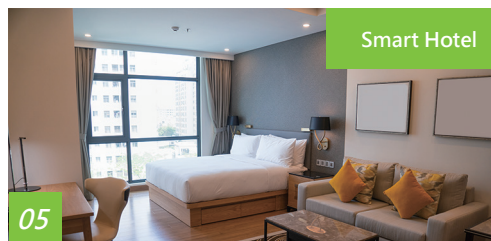

Smartbears APP



Build Your Own
Personal Smart Butler



Free exclusive APP, convenient and fast installation procedures, APP image operation interface, intuitive operation. It can be used immediately between the ages of 3 and 80. Integrated environmental control, security detection, health care, home appliance infrared control, remote monitoring, APP situational mode setting, Create a wonderful experience of the new technology of the future smart home, be easy to the enlargement.



Scan QR CODE Download SmartBears APP




Smartbears APP Instructions


Download SmartBears APP




Open APP

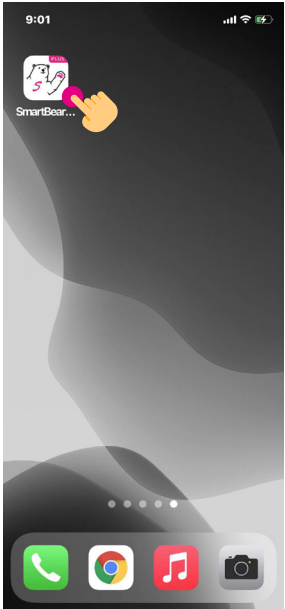


Add to e PATRON

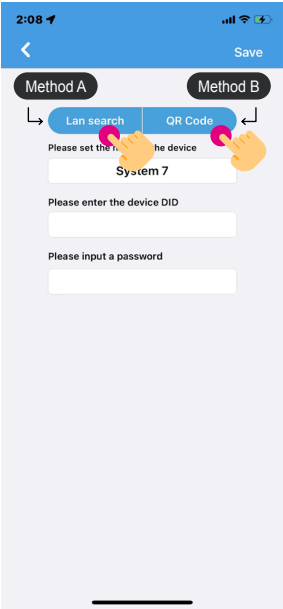


A-Local area network search



Host sequence

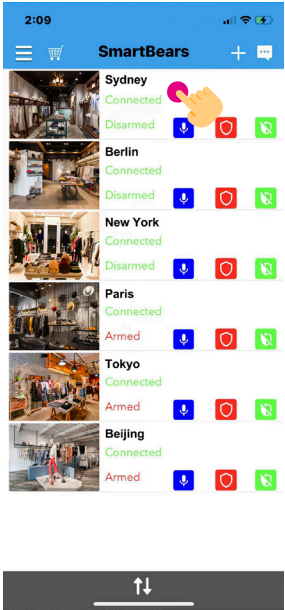


Host enter

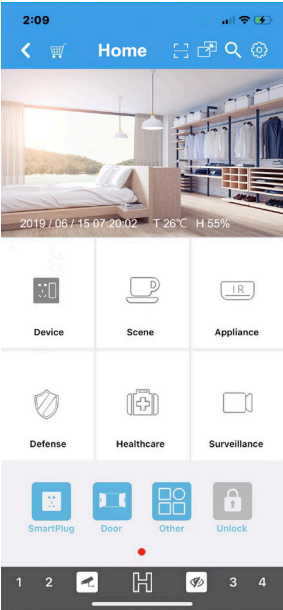

B-Scan QR CODE



Smartbears APP Function introduction

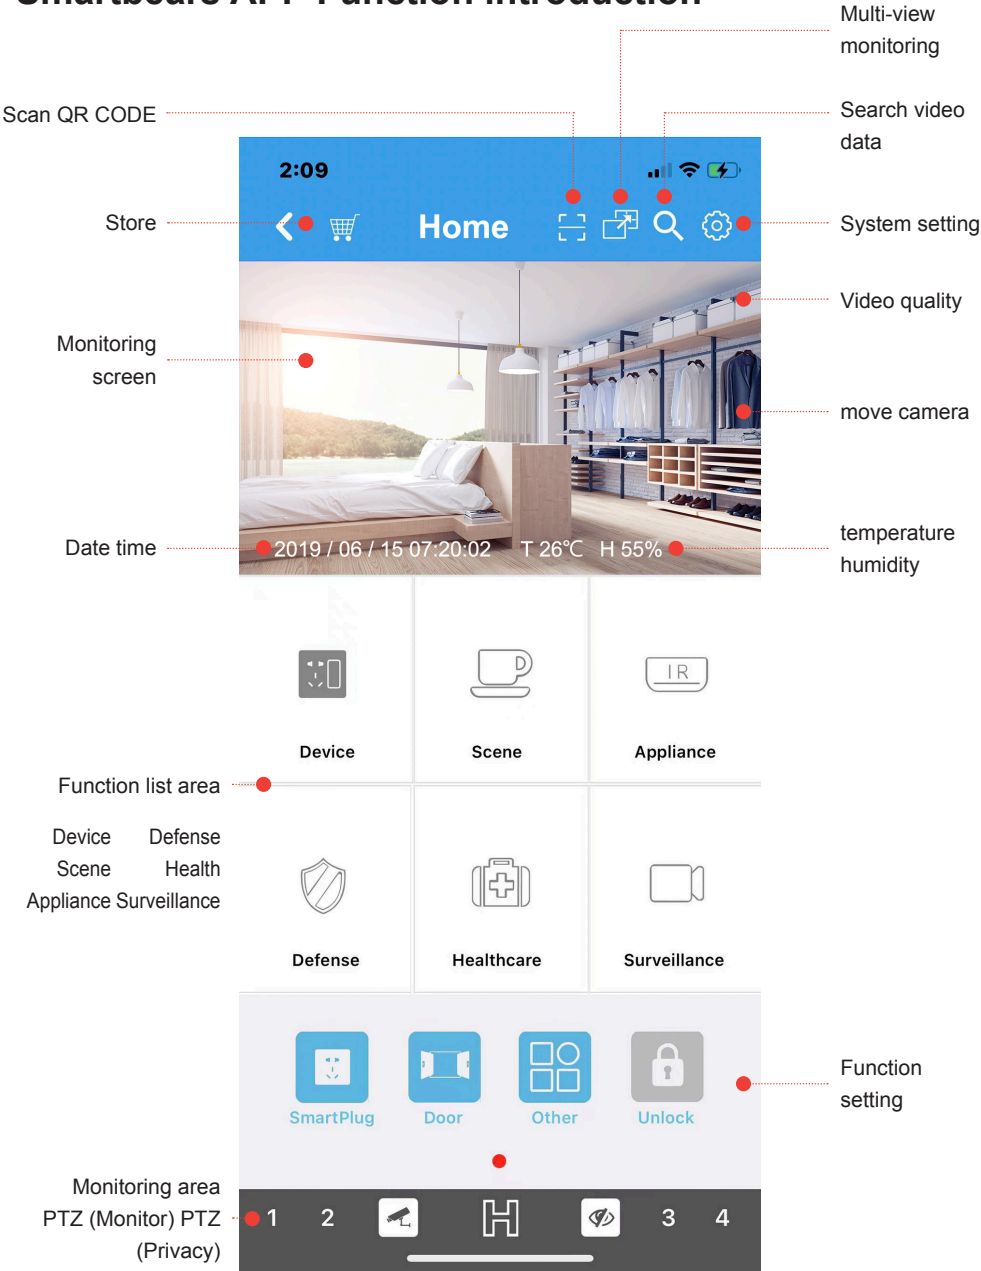

Immediate & Integrated Operation



ePATRON Surveillance & Control Center

All-round protection of family security, the best choice for business security

- The mobile phone with SmartBears APP is connected to the hub to achieve remote monitoring and control, realizing the smart home control.
- Intelligent Internet of things design, quick notification, protect home security all the time.
- Omni-directional detection guard without dead Angle, cloud push broadcast notice, fast continuous photo and cutting video.
- Exclusive monitoring bit & privacy bit design, private life is not exposed.
- Built-in infrared learning remote control for easy control of infrared appliances in your home.
- Context linkage mode, according to different situations to define and edit the situation, make the home smarter.



Cloud Smart IP Camera and Hub-PT Style

P/N : WS-533

Specifications

- Dimension : 132 (L) x 119 (W) x 135 (H) mm
- Input : 100-240V AC, 50/60Hz , DC 12V.
- Operating System : Android, iOS, PC
- Network Function : RTSP, TCP / IP, FTP, DHCP, PPPoE, NTP, UPnP, P2P
- Protocols : Vertical 115°; Horizontal 355°
- Usage : Indoor

Optional color :       

Accessories :  Power Adapter  Mainframe chassis  Micro SD  WiFi router



Cartoon style Surveillance & Control Center

P/N : WS-533C

Specifications

- Dimension : 132 (L) x 119 (W) x 135 (H) mm
- Input : 100-240V AC, 50/60Hz , DC 12V.
- Operating System : Android, iOS, PC
- Network Function : RTSP, TCP / IP, FTP, DHCP, PPPoE, NTP, UPnP, P2P
- Protocols : Vertical 115°; Horizontal 355°
- Usage : Indoor

Can choose style :



Accessories :  Power Adapter  Mainframe chassis  Micro SD  WiFi router







Cloud Smart IP Camera and Hub-Door Bell Style

P/N : WS-464-2

Specifications

- Dimension : 124 (L) x 100 (W) x 62 (H) mm
- Input : 100-240V AC, 50/60Hz , DC 12V.
- Operating System : Android, iOS, PC
- Network Function : RTSP, TCP / IP, FTP, DHCP, PPPoE, NTP, UPnP, P2P
- Protocols : Vertical 28°
- Usage : Indoor

Optional color :       

Accessories :  Power Adapter  Wall bracket  Micro SD  WiFi router



Cloud Smart IP Camera and Hub-Dome Style

P/N : WS-533B

Specifications

- Dimension : 132 (L) x 119 (W) x 72 (H) mm
- Input : 100-240V AC, 50/60Hz , DC 12V.
- Operating System : Android, iOS, PC
- Network Function : RTSP, TCP / IP, FTP, DHCP, PPPoE, NTP, UPnP, P2P
- Usage : Indoor

Optional color :       

Accessories :  Power Adapter  Mainframe chassis  Micro SD  WiFi router



Cloud Smart Hub

P/N : WS-533A

Specifications

- Dimension : 132 (L) x 119 (W) x 69 (H) mm
- Input : 100-240V AC, 50/60Hz , DC 12V.
- Operating System : Android, iOS, PC
- Network Function : RTSP, TCP / IP, FTP, DHCP, PPPoE, NTP, UPnP, P2P
- Usage : Indoor

Optional color :       

Accessories :  Power Adapter  Mainframe chassis  WiFi router



Cloud Smart IP Camera and Hub-Outdoor Style

P/N : WS-533-1

Specifications

- Dimension : 220 (L) x 70 (W) x 70 (H) mm
- Input : 100-240V AC, 50/60Hz , DC 12V.
- Operating System : Android, iOS, PC
- Network Function : TCP, UDP, IP, HTTP, DHCP, RTP, RTSP, FTP, SMTP, NTP, ICMP, IGMP, ARP
- Waterproof and dustproof level : IP68

Accessories :  Power Adapter



Cloud Smart IP Camera and Hub-PT Style - Security

P/N : WS-533D

Specifications

- Dimension : 132 (L) x 119 (W) x 135 (H) mm
- Input : 100-240V AC, 50/60Hz , DC 12V.
- Operating System : Android, iOS, PC
- Network Function : RTSP, TCP / IP, FTP, DHCP, PPPoE, NTP, UPnP, P2P
- Protocols : Vertical 115°; Horizontal 355°
- Usage : Indoor

Accessories :



Power Adapter



Mainframe chassis



Cloud Smart IP Camera and Hub-Door Bell Style - Security

P/N : WS-464-2

Specifications

- Dimension : 124 (L) x 100 (W) x 62 (H) mm
- Input : 100-240V AC, 50/60Hz , DC 12V.
- Operating System : Android, iOS, PC
- Network Function : RTSP, TCP / IP, FTP, DHCP, PPPoE, NTP, UPnP, P2P
- Protocols : Vertical 28°
- Usage : Indoor

Accessories :



Power Adapter



Wall bracket



Cloud Smart Hub - Security

P/N : WS-533A-1

Specifications

- Dimension : 132 (L) x 119 (W) x 69 (H) mm
- Input : 100-240V AC, 50/60Hz , DC 12V.
- Operating System : Android, iOS, PC
- Network Function : RTSP, TCP / IP, FTP, DHCP, PPPoE, NTP, UPnP, P2P
- Usage : Indoor










Accessories :



Power Adapter



Mainframe chassis

ePATRON Accessory			
 <p>Power Adapter</p>	 <p>12V 18.9AH battery Power wiring</p>	 <p>Network hard disk recorder</p>	 <p>Micro SD</p>
	 <p>2 Pole femail connector-IDC</p>	 <p>Mainframe chassis</p>	 <p>WiFi router</p>
			 <p>4G router</p>



The ePATRON surveillance & control center provides superior function & cost advantage :

After ten years of research and development, the world's first multi-function smart home IPCAM control center has been created, and the remote control smart center has highly integrated all the functional modules of smart home. The Internet of Things life link our phone, car, house and other electronic devices in one seamless network. ePATRON, the camera control center is smart home best cost-effective solution.



Long distance monitor system



Security warning system



IoT smart home system



Wireless voice control



IR remote control home appliance



Smart temperature environment controller



Smart home door lock control system



4G/NB- IoT wireless connection


Support NVR network hard disk video recorder



Smart playback




Audio and video
synchronization



Centrally manage data

Compatible and easy to configure

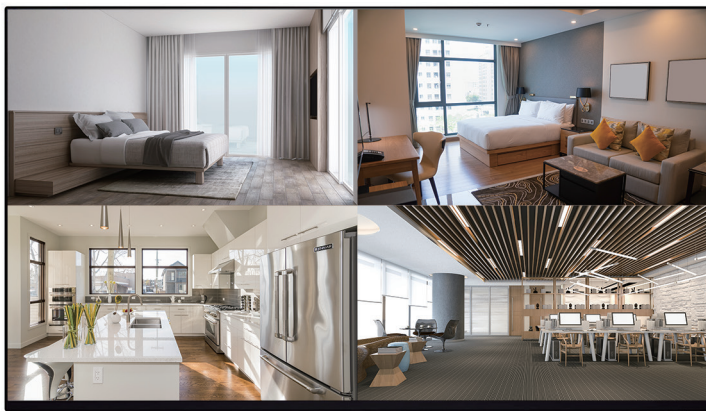







eVOICE Voice Control

You can control various situational modes by voice without opening the APP

- Use voice commands now to experience a new intelligent life.
- Free exclusive APP to build your personal smart butler.
- This series of products must be used with ePatron (smart hub)

Smart Voice Remote Controller-Plug Type	Smart Voice Remote Controller-Wall Plate Type
<div data-bbox="244 199 386 383" data-label="Image"> </div> <div data-bbox="176 422 455 446" data-label="Text"> <p>P/N : WS-551-6  WS-550-6 </p> </div> <div data-bbox="117 466 220 486" data-label="Section-Header"> <p>Specifications</p> </div> <div data-bbox="117 496 428 711" data-label="List-Group"> <ul style="list-style-type: none"> · Dimension : 52.5(L) x 40(W) x 49(H) mm · Frequency : FSK · Transmission Consumption : 17dBm · Input : 100-240V AC, 0.1A MAX 50/60Hz · Language China, Japan, English, Spanish · Usage : Indoor · This product must be used with ePatron </div>	<div data-bbox="677 183 932 371" data-label="Image"> </div> <div data-bbox="658 422 939 446" data-label="Text"> <p>P/N : WS-340-9  WS-345-3 </p> </div> <div data-bbox="599 466 704 486" data-label="Section-Header"> <p>Specifications</p> </div> <div data-bbox="599 496 964 721" data-label="List-Group"> <ul style="list-style-type: none"> · Dimension : China 86(L) x 86(W) x 41.6(H) mm USA 70.6(L) x 115(W) x 41.6(H) mm · Frequency : FSK · Transmission Consumption : 17dBm · Input : 100-240V~, 50/60Hz, MAX 2W · Language : China, Japan, English, Spanish · Usage : Indoor · This product must be used with ePatron </div>

Handheld Voice Remote	Add-on type IR voice control remoter
<div data-bbox="256 906 383 1093" data-label="Image"> </div> <div data-bbox="250 1114 380 1134" data-label="Text"> <p>P/N : WS-534-1D</p> </div> <div data-bbox="117 1160 220 1181" data-label="Section-Header"> <p>Specifications</p> </div> <div data-bbox="117 1195 428 1442" data-label="List-Group"> <ul style="list-style-type: none"> · Dimension : 54(L) x 83(W) x 17(H) mm · Frequency : FSK · Transmission Consumption : 17dBm · Battery type : 1.5V AAA x 2 · Language China, Japan, English, Spanish · Usage : Indoor · This product must be used with ePatron </div>	<div data-bbox="677 911 917 1086" data-label="Image"> </div> <div data-bbox="731 1114 864 1134" data-label="Text"> <p>P/N : WS-533A-4</p> </div> <div data-bbox="599 1160 704 1181" data-label="Section-Header"> <p>Specifications</p> </div> <div data-bbox="599 1190 1000 1469" data-label="List-Group"> <ul style="list-style-type: none"> · Dimension : 132 (L) x 119 (W) x 69 (H) mm · Input : 100-240V AC, 50/60Hz , DC 12V. · Operating System : Android, iOS, PC · Network Function : RTSP, TCP / IP, FTP, DHCP, PPPoE, NTP, UPnP, P2P · Frequency : FSK · Transmission Consumption : 17dBm · Language China, Japan, English, Spanish · Usage : Indoor </div>



Activation Key : **SHIR**

Smart External Corresponding Voice
Command list download



scan the QR code to download

Corresponding to smart voice remote control



Smartbear Smart External Corresponding Voice Command list (1)

Voice Command Phrase

Corresponding Sound Output

1	SHIR-ACTIVATE-EVERYTHING	Bleeding Money	21	SHIR-TURN DOWN THE LIGHT	Right on
2	SHIR-DEACTIVATE-EVERYTHING	Everything off	22	SHIR-TURN UP THE LIGHT	Orders up
3	SHIR-I AM BACK	Welcome back	23	SHIR-CURTAIN-OPEN	Another Dawn
4	SHIR-LEAVING-HOME	Safe Trip!!!	24	SHIR-CURTAIN-CLOSE	Another Day
5	SHIR-TIME TO BED	Good Night	25	SHIR-CURTAIN-STOP	Curtain stopped
6	SHIR-MEETING-MODE	Meetings again?	26	SHIR-WINDOW-OPEN	Natural Air
7	SHIR-WORK-MODE	Money Money	27	SHIR-WINDOW-CLOSE	Getting Late
8	SHIR-CUSTOM-MODE	Setting up	28	SHIR-LIGHT-ON	Gotcha
9	SHIR-ALARM ON	Be safe	29	SHIR-LIGHT-OFF	Small Steps
10	SHIR-ALARM OFF	Welcome home	30	SHIR-WATER VALVE OPEN	Bleeding Money
11	SHIR-ANTI-THEFT-MODE-ON	Over watching On	31	SHIR-WATER VALVE CLOSE	Airtight shut
12	SHIR-ANTI-THEFT-MODE-OFF	Too Trusting	32	SHIR-VENTILATION ON	Fresh air
13	SHIR-COLORFUL LIGHT	Bling Bling	33	SHIR-VENTILATION OFF	Don't Suffocate
14	SHIR-WARM LIGHT	Eye Caring On	34	SHIR-OPEN-THE-DOOR	Welcome
15	SHIR-WHITE LIGHT	Full Visibility	35	SHIR-CLOSE-THE-DOOR	Safe Zoning
16	SHIR-BLUE LIGHT	Monday Already?	36	SHIR-DOG-FEED	Bark
17	SHIR-PURPLE LIGHT	Happy Holiday	37	SHIR-CAT-FEED	Meow
18	SHIR-GREEN LIGHT	Eye Protection On	38	SHIR-FAN-ON	(Sneeze)
19	SHIR-RED LIGHT	Fired up	39	SHIR-FAN-OFF	Sweating Already
20	SHIR-YELLOW LIGHT	Feeling snappy?	40	SHIR-TV-ON	Time Traveling

Smartbear Smart External Corresponding Voice Command list (1)

Voice Command Phrase		Corresponding Sound Output		
41	SHIR-TV-OFF	Back Already?	78 SHIR-WALL-LIGHT-OFF	Light off
42	SHIR-PREVIOUS-CHANNEL	Previous Channel	79 SHIR-DOWN-LIGHT-ON	Down light on
43	SHIR-NEXT-CHANNEL	Next Channel	80 SHIR-DOWN-LIGHT-OFF	Down light off
44	SHIR-VOLUME-UP	Too noisy	81 SHIR-CEILING-LIGHT-ON	Ceiling light on
45	SHIR-VOLUME-DOWN	Thank God	82 SHIR-CEILING-LIGHT-OFF	Ceiling light off
46	SHIR-AC-ON	Hooray	83 SHIR-SOCKET-ON	Socket on
47	SHIR-AC-OFF	Penny Pincher	84 SHIR-SOCKET-OFF	Socket off
48	SHIR-TEMPERATURE-UP	Temperature up	85 SHIR-SWITCH-ON	Switch on
49	SHIR-TEMPERATURE-DOWN	Temperature down	86 SHIR-SWITCH-OFF	Switch off
50	SHIR-ROTATE-WIND	All Covered	87 SHIR-FLOOR-LIGHT-ON	Floor light on
51	SHIR-ECO-ON	Eco on	88 SHIR-FLOOR-LIGHT-OFF	Floor light off
52	SHIR-ECO-OFF	Eco off	89 SHIR-BERTH-LIGHT-ON	Berth light on
53	SHIR-MOTION-ON	Motion on	90 SHIR-BERTH-LIGHT-OFF	Berth light off
54	SHIR-MOTION-OFF	Motion off	91 SHIR-INSIDE-DOOR-OPEN	Inside door opened
55	SHIR-OPTIC-ON	Optic on	92 SHIR-INSIDE-DOOR-CLOSE	inside door closed
56	SHIR-OPTIC-OFF	Optic off	93 SHIR-STAGE-LIGHT-ON	Stage light on
57	SHIR-AUDIO-ON	Audio on	94 SHIR-STAGE-LIGHT-OFF	Stage light off
58	SHIR-AUDIO-OFF	Audio off	95 SHIR-PROJECTOR-LIGHT-ON	Projector light on
59	SHIR-TEMPERATURE-ON	Monitoring, Please be at Designated Spot	96 SHIR-PROJECTOR-LIGHT-OFF	Projector light off
60	SHIR-TEMPERATURE-OFF	Body Temperature Monitor Complete	97 SHIR-CHANDELIER-ON	Chandelier on
61	SHIR-OXYGEN-ON	Oxygen Level Monitoring	98 SHIR-CHANDELIER-OFF	Chandelier off
62	SHIR-OXYGEN-OFF	Oxygen Level Monitor Complete	99 SHIR-LIVING-ROOM-ON	living room on
63	SHIR-HUMIDITY-ON	Humidity on	100 SHIR-LIVING-ROOM-OFF	living room off
64	SHIR-HUMIDITY-OFF	Humidity off	101 SHIR-BEDROOM-ON	bedroom on
65	SHIR-PROJECTOR-ON	I'll get right on to it	102 SHIR-BEDROOM-OFF	bedroom off
66	SHIR-PROJECTOR-OFF	Don't overheat it	103 SHIR-MASTER-BEDROOM-ON	master bedroom on
67	SHIR-RADIO-ON	Show Time	104 SHIR-MASTER-BEDROOM-OFF	master bedroom off
68	SHIR-RADIO-OFF	Show Ended	105 SHIR-STUDY-ROOM-ON	Study room on
69	SHIR-OUTER-CURTAIN-OPEN	Sunny outside	106 SHIR-STUDY-ROOM-OFF	Study room off
70	SHIR-OUTER-CURTAIN-CLOSE	Please wait	107 SHIR-KITCHEN-ON	Kitchen on
71	SHIR-OUTER-CURTAIN-STOP	Curtain stopped	108 SHIR-KITCHEN-OFF	Kitchen off
72	SHIR-INNER-CURTAIN-OPEN	Cozy	109 SHIR-KID'S-ROOM-ON	Kid's room on
73	SHIR-INNER-CURTAIN-CLOSE	Please standby	110 SHIR-KID'S-ROOM-OFF	Kid's room off
74	SHIR-INNER-CURTAIN-STOP	Curtain stopped	111 SHIR-PARENT'S-ROOM-ON	Parent's room on
75	SHIR-FESTOON-LIGHT-ON	Right on	112 SHIR-PARENT'S-ROOM-OFF	Parent's room off
76	SHIR-FESTOON-LIGHT-OFF	All Set	113 SHIR-GIRL'S-ROOM-ON	Girl's room on
77	SHIR-WALL-LIGHT-ON	Light on	114 SHIR-GIRL'S-ROOM-OFF	Girl's room off

Smartbear Smart External Corresponding Voice Command list (1)

Voice Command Phrase		Corresponding Sound Output			
115	SHIR-BOY'S-ROOM-ON	Boy's room on	152	SHIR-PORCH-OFF	Porch off
116	SHIR-BOY'S-ROOM-OFF	Boy's room off	153	SHIR-PLANTER-BOX-ON	Planter box on
117	SHIR-BABY'S-ROOM-ON	Baby's room on	154	SHIR-PLANTER-BOX-OFF	Planter box off
118	SHIR-BABY'S-ROOM-OFF	Baby's room off	155	SHIR-BATHROOM-ON	Bathroom on
119	SHIR-STUDIO-ON	Studio on	156	SHIR-BATHROOM-OFF	Bathroom off
120	SHIR-STUDIO-OFF	Studio off	157	SHIR-LAUNDRY-ROOM-ON	Laundry room on
121	SHIR-RESTROOM-ON	Restroom on	158	SHIR-LAUNDRY-ROOM-OFF	Laundry room off
122	SHIR-RESTROOM-OFF	Restroom off	159	SHIR-WASHSTAND-ON	Washstand on
123	SHIR-SHOWER-ROOM-ON	Shower room on	160	SHIR-WASHSTAND-OFF	Washstand off
124	SHIR-SHOWER-ROOM-OFF	Shower room off	161	SHIR-GARDEN-ON	Garden on
125	SHIR-WASHROOM-ON	Washroom on	162	SHIR-GARDEN-OFF	Garden off
126	SHIR-WASHROOM-OFF	Washroom off	163	SHIR-GARAGE-ON	Garage on
127	SHIR-STORAGE-ON	Storage on	164	SHIR-GARAGE-OFF	Garage off
128	SHIR-STORAGE-OFF	Storage off	165	SHIR-STAIRS-ON	Stairs on
129	SHIR-WORKSHOP-ON	Workshop on	166	SHIR-STAIRS-OFF	Stairs off
130	SHIR-WORKSHOP-OFF	Workshop off	167	SHIR-PATIO-ON	Patio on
131	SHIR-PRAYER-ROOM-ON	Prayer room on	168	SHIR-PATIO-OFF	Patio off
132	SHIR-PRAYER-ROOM-OFF	Prayer room off	169	SHIR-SWIMMING-POOL-ON	Swimming pool on
133	SHIR-PLAY-ROOM-ON	Play room on	170	SHIR-SWIMMING-POOL-OFF	Swimming pool off
134	SHIR-PLAY-ROOM-OFF	Play room off	171	SHIR-ELEVATOR-ON	Elevator on
135	SHIR-PET-ROOM-ON	Pet room on	172	SHIR-ELEVATOR-OFF	Elevator off
136	SHIR-PET-ROOM-OFF	Pet room off	173	SHIR-CEILING-FAN-ON	Ceiling fan on
137	SHIR-STREET-LIGHT-ON	Street light on	174	SHIR-CEILING-FAN-OFF	Ceiling fan off
138	SHIR-STREET-LIGHT-OFF	Street light off	175	SHIR-FRONT-DOOR-OPEN	Front door opened
139	SHIR-MAID'S-ROOM-ON	Maid's room on	176	SHIR-FRONT-DOOR-CLOSE	Front door closed
140	SHIR-MAID'S-ROOM-OFF	Maid's room off	177	SHIR-PRIVACY-POSITION	Privacy position settled
141	SHIR-ENTERTAINMENT-ROOM-ON	Entertainment room on	178	SHIR-PRESET-POSITION	Preset position settled
142	SHIR-ENTERTAINMENT-ROOM-OFF	Entertainment room off	179	SHIR-SCREEN-ON	Screen on
143	SHIR-BASEMENT-ON	Basement on	180	SHIR-SCREEN-OFF	Screen off
144	SHIR-BASEMENT-OFF	Basement off	181	SHIR-DEHUMIDIFICATION-ON	Dehumidification on
145	SHIR-BIN-ROOM-ON	Bin room on	182	SHIR-DEHUMIDIFICATION-OFF	Dehumidification off
146	SHIR-BIN-ROOM-OFF	Bin room off	183	SHIR-CALL-SECURITY	Security Notified
147	SHIR-CORRIDOR-ON	Corridor on	184	SHIR-CALL-HOUSEKEEPER	Housekeeper Notified
148	SHIR-CORRIDOR-OFF	Corridor off	185	SHIR-CALL-DELIVERY	Delivery Notified
149	SHIR-BALCONY-ON	Balcony on	186	SHIR-CALL-POLICE	Police Notified
150	SHIR-BALCONY-OFF	Balcony off	187	SHIR-TURN-ON-WATER	Bleeding Money
151	SHIR-PORCH-ON	Porch on	188	SHIR-TURN-OFF-WATER	Airtight shut



Smartbear Smart External Corresponding Voice Command list (2)

Corresponds to an external audio source

Remark

1	It's time to see a doctor	Non-voice control commands	10	It's time for airport pickup	Non-voice control commands
2	It's time to measure blood pressure		11	It's time for meeting	
3	It's time for reinspection		12	It's time for the show	
4	It's time to measure blood glucose		13	It's time for your lover's birthday	
5	It's time for lunch.		14	It's time for parents' birthday	
6	It's time for meeting.		15	It's time for sports	
7	It's time for boarding.		16	It's time for kid's pick up	
8	It's time for visiting.		17	It's time for outing	
9	It's time for meeting guests.				

Voice Command Phrase

Corresponding Sound Output

Remark





18	SHIR-CRUISE-ON	Cruise on	Voice control
19	SHIR-CRUISE-OFF	Cruise off	
20	SHIR-MUSIC-ON	Music on	
21	SHIR-MUSIC-STOP	Music stopped	
22	SHIR-MUSIC-OFF	Music off	











eSENSOR Access Control



In case of intruders actively push broadcast notifications.

- Remote control switch of mobile phone, controlled by heart, energy saving and convenient.
- Guard home safety, return in time.
- Can be equipped with the hub automatic continuous photography and video, so that intruders can not hide.
- Connect a variety of custom situational modes, such as opening the door to automatically turn on air conditioning and light.
- Free exclusive APP to build your personal smart butler.
- This series of products must be used with ePatron (smart hub)

Smart PIR Sensor-Plug Type	Wireless Control Smart PIR Sensor
<div data-bbox="143 196 510 379">  </div> <div data-bbox="180 430 452 454"> <p>P/N : WS-550-1  WS-551-2 </p> </div> <div data-bbox="117 483 217 504"> <p>Specifications</p> </div> <div data-bbox="117 513 427 729"> <ul style="list-style-type: none"> · Dimension : 52.5(L) x 40(W) x 49(H) mm · Input : 100-240V AC, 0.1A MAX 50 / 60Hz · Distance : 5-7m · Angle : 70°-90° · Transmission Distance : 75M (Line of Sight) · Usage : Indoor · This product must be used with ePatron </div>	<div data-bbox="740 183 860 387">  </div> <div data-bbox="742 430 851 451"> <p>P/N : WS-531</p> </div> <div data-bbox="598 483 700 504"> <p>Specifications</p> </div> <div data-bbox="598 513 911 729"> <ul style="list-style-type: none"> · Dimension : 114(L) x 66(W) x 44(H) mm · Battery type : DC 3V (1 x 3V / CR123mA) · Distance : 5-7m · Angle : 70°-90° · Transmission Distance : 75M (Line of Sight) · Usage : Indoor · This product must be used with ePatron </div>

Smart PIR Sensor Night light-Wall Plate Type	Smart PIR Sensor-Wall Plate Type
<div data-bbox="176 900 448 1102">  </div> <div data-bbox="208 1125 425 1150"> <p>P/N : WS-340-12B  </p> </div> <div data-bbox="117 1182 222 1204"> <p>Specifications</p> </div> <div data-bbox="117 1214 480 1398"> <ul style="list-style-type: none"> · Dimension : China 86(L) x 86(W) x 41.6(H) mm USA 70.6(L) x 115(W) x 41.6(H) mm · Input : 100-240V AC, 50mA MAX 50/60Hz · Distance : 10M · Angle : 100° · Usage : Indoor </div>	<div data-bbox="657 900 930 1102">  </div> <div data-bbox="641 1125 956 1150"> <p>P/N : WS-340-12A  WS-345-10A </p> </div> <div data-bbox="598 1182 704 1204"> <p>Specifications</p> </div> <div data-bbox="598 1214 964 1461"> <ul style="list-style-type: none"> · Dimension : China 86(L) x 86(W) x 41.6(H) mm USA 70.6(L) x 115(W) x 41.6(H) mm · Input : 100-240V AC, 50mA MAX 50/60Hz · Distance : 10M · Angle : 100° · Transmission Distance : 75M (Line of Sight) · Usage : Indoor · This product must be used with ePatron </div>

DC Night Lamp	Smart Visitor Sensing Lamp
 <p>P/N : WS-537A</p> <p>Specifications</p> <ul style="list-style-type: none"> · Dimension : Ø69.2 x 19.9 mm · Input : Micro USB DC 5V · Battery type : 503040 3.7V 600mAh · Wattage : 0.6W · Distance : 3~6m · Delay : 30 seconds · Transmission Range : 75M (Line of Sight) · Indicator light : Red when charging, Off when full. · Usage : Indoor 	 <p>P/N : WS-537B</p> <p>Specifications</p> <ul style="list-style-type: none"> · Dimension : Ø69.2 x 19.9 mm · Input : Micro USB DC 5V · Battery type : 503040 3.7V 600mAh · Wattage : 0.6W · Distance : 3~6m · Delay : 30 seconds · Transmission Range : 75M (Line of Sight) · Wireless Control Lighting · Indicator light : Red when charging, Off when full. · Usage : Indoor · This product must be used with ePatron

Wireless Magnetic Door Sensor	Wireless Powerful Magnetic Door Sensor
 <p>P/N : WS-530</p> <p>Specifications</p> <ul style="list-style-type: none"> · Weight : 53g (Battery Excluded) · Dimension : 96(L) x 31.5(W) x 19(H) mm (Magnet) 96(L) x 13.7(H) x 15.1(H) mm (Armature) · Transmission Distance : 75M (Open space) · Maximum Air Gap : 12mm (Between magnet and armature) · Anti-tear Alarm : Supported · Routine Report : Report On-Line status to ePatron every 12 hours · Power Consumption : Stand by : 20uA Transmission : 30mA · Battery Life : 6~12months (Depends on usage) · Low Voltage Alarm : Send alert to ePatron while voltage lower than 6V · Power Supply : 12V 23A battery · Operating Temperature/Humidity : Temperature -10~50°C, Humidity: 5-95% (Unfrozen) · This product must be used with ePatron 	 <p>P/N : DS-330MC</p> <p>Specifications</p> <ul style="list-style-type: none"> · Weight : 93g (Battery Excluded) · Dimension : 95(L) x 24(W) x 21(H) mm (Magnet) 390(L) x 37.5(H) x 10.5(H) mm (Armature1/Including line length) 105.6(L) x 15.6(H) x 15(H) mm (Armature2) · Transmission Distance : 75M (Open space) · Maximum Air Gap : 45mm (Between magnet and armature) · Anti-tear Alarm : Supported · Routine Report : Report On-Line status to ePatron every 12 hours · Power Consumption : Stand by : 20uA Transmission : 60mA · Battery Life : 6~12months (Depends on usage) · Low Voltage Alarm : Send alert to ePatron while voltage lower than 6V · Power Supply : DC3V / CR123A battery · Operating Temperature/Humidity : Temperature -10~50°C, Humidity: 5-95% (Unfrozen) · This product must be used with ePatron

Scenario remote controller

inside-defined



P/N : WS-534-A

individual define



P/N : WS-534-B

Handheld Voice Remote-individual define



P/N : WS-534-C

Specifications

- Weight : 18g (Battery Excluded)
- Dimension : 58.5(L) x 35(W) x 11.5(H) mm
- Battery type : DC 12V 23a
- Transmission Range : 75M (Line of Sight)
- Colour : white / yellow / pink
- Usage : Indoor
- This product must be used with ePatron

Voice Remote Controller


- Transmission Consumption : 17dBm
- Language China, Japan, English, Spanish

Scenario Switch - Wall Plate Type

inside-defined



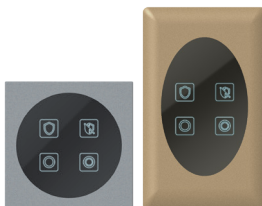

self-defined





individual define



P/N : WS-494-A  

Specifications

- Dimension : China 86(L) x 86(W) x 41.6(H) mm
- USA 70.6(L) x 115(W) x 41.6(H) mm
- Input : 100-240V AC, 50mA MAX 50/60Hz
- Color : Gold / Grey
- Transmission Distance : 75M (Line of Sight)
- Usage : Indoor
- This product must be used with ePatron

Smart Door Bell	Smart Door Bell-Battery type
<div data-bbox="173 167 454 371"> </div> <div data-bbox="168 419 463 443"> <p>P/N : WS-340-6D  WS-345-7D </p> </div> <div data-bbox="117 494 220 515"> <p>Specifications</p> </div> <div data-bbox="117 525 478 707"> <ul style="list-style-type: none"> · Dimension : China 86(L) x 86(W) x 41.6(H) mm USA 70.6(L) x 115(W) x 41.6(H) mm · Input : 100-240V AC, 50mA MAX 50/60Hz · Transmission Distance : 75M (Line of Sight) · Usage : Indoor · This product must be used with ePatron </div>	<div data-bbox="703 175 894 367"> </div> <div data-bbox="745 419 852 440"> <p>P/N : WS-537</p> </div> <div data-bbox="601 494 704 515"> <p>Specifications</p> </div> <div data-bbox="601 518 956 729"> <ul style="list-style-type: none"> · Weight : 65g (Battery Excluded) · Dimension : Ø65 x 21.2 (H) mm · Battery type : DC 3V (CR2032) · Low Voltage Alarm : Send alert to ePatron while voltage lower than 3V · Transmission Range : 75M (Line of Sight) · Usage : Indoor · This product must be used with ePatron </div>

Wireless Smoke Detector	Smart Gas Sensor
<div data-bbox="184 936 446 1107"> </div> <div data-bbox="117 1166 220 1187"> <p>Specifications</p> </div> <div data-bbox="117 1198 507 1445"> <ul style="list-style-type: none"> · Transmission Range : 75M (Line of Sight) · Input : 100-240V AC, 50/60Hz · Sensing element: photoelectric smoke sensor · Built-in buzzer alarm · Operating Temperature/Humidity : Temperature -10~50°C, Humidity : 5-95% (Unfrozen) · Usage : Indoor · This product must be used with ePatron </div>	<div data-bbox="689 940 902 1101"> </div> <div data-bbox="601 1166 704 1187"> <p>Specifications</p> </div> <div data-bbox="601 1198 992 1445"> <ul style="list-style-type: none"> · Transmission Range : 75M (Line of Sight) · Input : 100-240V AC, 50/60Hz · Gas detection : GAS (gas, LNG and LPG), suitable for natural gas and liquefied petroleum gas · Operating Temperature/Humidity : Temperature -10~50°C, Humidity : 5-95% (Unfrozen) · Usage : Indoor · This product must be used with ePatron </div>

Intelligent control, secure the safety of the whole family



Smart Gas Valve Controller-LPG Type



P/N : WS-015D-27E

Specifications

- Transmission Range : 75M (Line of Sight)
- Input : 100-240V AC, 50/60Hz
- Open and close valve time : 5-10 seconds
- Dustproof and waterproof grade : IP66
- Operating Temperature/Humidity :
Temperature -10~50°C, Humidity : 5-95% (Unfrozen)
- Usage : Indoor
- This product must be used with ePatron

Smart Gas Valve Controller-NG Type



P/N : WS-015D-27D

Specifications

- Transmission Range : 75M (Line of Sight)
- Input : 100-240V AC, 50/60Hz
- Valve closing method : DC pulse drive, manual
- Valve opening method : manual
- Operating Temperature/Humidity :
Temperature -10~50°C, Humidity : 5-95% (Unfrozen)
- Usage : Indoor
- This product must be used with ePatron

Wireless Buzzer

1 type



P/N : WS-551-7  WS-550-7 

2 type



P/N : WS-551-7  WS-550-7 

Specifications

- Dimension : 52.5(L) x 40(W) x 49(H) mm
- Input : 100-240V AC, MAX 50/60Hz
- Plug type : China / USA NEMA 5-15P
- Maximum volume : about 100 decibels
- Transmission Distance : 75M (Line of Sight)
- Usage : Indoor
- This product must be used with ePatron



Lamp type wireless buzzer



P/N : WS-461

Specifications

- Input : 100-240V AC, 50/60Hz
- Lamp head : E26/E27
- Speaker power : 8W max
- Operating temperature : -10 ~ 50°C / Humidity : 5 ~ 95% (no freezing)
- Transmission Distance : 75M (Line of Sight)
- Usage : Indoor
- This product must be used with ePatron

SENSOR Accessory



AAA battery



CR123A battery



CR17450
3V 2600mAh battery



CR2023 battery



eTOUCH Wireless Control Switch & Plug

Remote control power switch, easy to save energy and reduce carbon



- Remote control switch of mobile phone, controlled by heart, energy saving and convenient.
- Switch timing control/remote control/touch control.
- Overload protection of power supply, reduce the danger of leakage and accidental fire.
- Physical button connect a variety of custom situational modes, such as opening the door to automatically turn on air conditioning and light.
- Free exclusive APP to build your personal smart butler.
- This series of products must be used with ePatron (smart hub)

Wireless Control Wall Switch - N,L in and out

1 Control





P/N : WS-340-6B+WS-338-1D  WS-492-1+WS-342-1 

 : 86 (L) x 86 (W) x 27 (H) mm
 : 120 (L) x 70 (W) x 27 (H) mm


2 Control





P/N : WS-340-6B+WS-340-16  WS-492-2+WS-342-1 

 : 86 (L) x 141 (W) x 27 (H) mm
 : 120 (L) x 116 (W) x 27 (H) mm

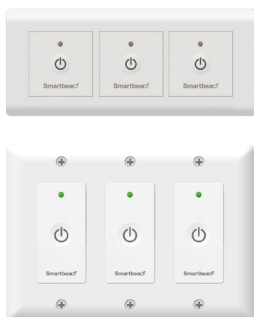3 Control





P/N : WS-340-6B+WS-340-14  WS-492-3+WS-342-1 

 : 86 (L) x 175 (W) x 27 (H) mm
 : 120 (L) x 162 (W) x 27 (H) mm

4 Control



P/N : WS-340-6B+WS-340-15  WS-492-4+WS-342-1 

 : 86 (L) x 230 (W) x 27 (H) mm
 : 120 (L) x 208 (W) x 27 (H) mm

Specifications



- Input : 100-240V AC, 50/60Hz
- Output : 2A 250V~ / 4A 125V~, 50/60Hz, 500W MAX
- Transmission Distance : 75M (Line of Sight)
- Wireless or Touch Control : Lighting ON and OFF
- Protection : OVP / OCP / OTP / SCP
- With LED indicator
- Usage : Indoor
- This product must be used with ePatron

Wireless Control Wall Switch - N,L and single L use in common

1 Control





P/N : WS-494-1A  WS-342-1B 

 : 86 (L) x 86 (W) x 27 (H) mm
 : 120 (L) x 116 (W) x 27 (H) mm

2 Control





P/N : WS-494-2A  WS-342-2A 

 : 86 (L) x 141 (W) x 27 (H) mm
 : 120 (L) x 116 (W) x 27 (H) mm

3 Control



P/N : WS-494-3A  WS-342-3A 

 : 86 (L) x 86 (W) x 27 (H) mm
 : 120 (L) x 116 (W) x 27 (H) mm



Capacitive junction box

· Capacitive junction box shall be installed in the first circuit of single fire switch



Specifications

- Input : 100-240V AC, 50/60Hz
- Output : 2A 250V~ / 4A 125V~, 50/60Hz, 600W MAX
- Transmission Distance : 75M (Line of Sight)
- Wireless or Touch Control : Lighting ON and OFF
- Protection : OVP / OCP / OTP / SCP
- With LED indicator
- Usage : Indoor
- This product must be used with ePatron

Wireless Control Wall Switch - N,L in and out



P/N : WS-340-6B  WS-345-7B 


 : 86 (L) x 86 (W) x 27 (H) mm
 : 120 (L) x 116 (W) x 27 (H) mm

Specifications



- Input : 100-240V AC, 50/60Hz
- Output : 2A 250V~ / 4A 125V~, 50/60Hz, 600W MAX
- Transmission Distance : 75M (Line of Sight)
- Wireless or Touch Control : Lighting ON and OFF
- Protection : OVP / OCP / OTP / SCP
- With LED indicator
- Usage : Indoor
- This product must be used with ePatron

Wireless Control Wall Switch - N,L and single L use in common


1 Control





P/N : WS-494-1A  WS-342-1B 

 : 86 (L) x 86 (W) x 27 (H) mm
 : 120 (L) x 116 (W) x 27 (H) mm


2 Control





P/N : WS-494-2A  WS-342-2A 

 : 86 (L) x 141 (W) x 27 (H) mm
 : 120 (L) x 116 (W) x 27 (H) mm

3 Control



P/N : WS-494-3A  WS-342-3A 

 : 86 (L) x 86 (W) x 27 (H) mm
 : 120 (L) x 116 (W) x 27 (H) mm



Capacitive junction box

· Capacitive junction box shall be installed in the first circuit of single fire switch

Specifications

- Input : 100-240V AC, 50/60Hz
- Output : 2A 250V~ / 4A 125V~, 50/60Hz, 600W MAX
- Transmission Distance : 75M (Line of Sight)
- Wireless or Touch Control : Lighting ON and OFF
- Protection : OVP / OCP / OTP / SCP
- With LED indicator
- Usage : Indoor
- This product must be used with ePatron

Multi-color selection, random collocation



Grey

Gold



Green











Shock Pink




Blue







Pink





Canary

Wireless Control Wall Switch - N,L in and out	Wireless Control Inductive Wall Switch
 <p>P/N : WS-342-6</p> <p>Specifications</p> <ul style="list-style-type: none"> · dimension : 114.4 (L) x 114.4 (W) x 57.8 (H) mm · Input : 100-240V AC, 50/60Hz · Output : 100-240V AC, 2A Max.,50/60Hz · Transmission Distance : 75M (Line of Sight) · Wireless or Touch Control : (5 circuits / 1 total power supply) ON and OFF · Protection : OVP / OCP / OTP / SCP · Usage : Indoor · This product must be used with ePatron 	<div>For Lights For Electric Doors</div>  <p>P/N : WS-494-7 / WS-494-7A</p> <p>Specifications</p> <ul style="list-style-type: none"> · dimension : 86 (L) x 86 (W) x 29.85 (H) mm · Input : 100-240V AC, 50/60Hz · Output : 100-240V AC, 500W Max.,50/60Hz · Transmission Distance : 75M (Line of Sight) · Protection : OVP / OCP / OTP / SCP · Usage : Indoor · This product must be used with ePatron


Wireless Control Wall Socket	Wireless Control Wall Socket - Outlet x 2
 <p>P/N : WS-339-6C  WS-341-6 </p> <div>  86 (L) x 86 (W) x 27 (H) mm  120 (L) x 116 (W) x 27 (H) mm </div> <p>Specifications</p> <ul style="list-style-type: none"> · Input : China 100-240V AC, 50/60Hz USA 125V AC, 50/60Hz · Output : China 100-240V AC, 10A Max.,50/60Hz USA 125V AC, 10A Max.,50/60Hz · Socket : China 3P x 1 / USA NEMA 5-15R x 1 · Transmission Distance : 75M (Line of Sight) · Wireless or Touch Control : ON and OFF · Protection : OVP / OCP / OTP / SCP · Usage : Indoor · This product must be used with ePatron 	 <p>P/N : WS-339-4A  WS-339-4 </p> <div>  86 (L) x 86 (W) x 27 (H) mm  120 (L) x 116 (W) x 27 (H) mm </div> <p>Specifications</p> <ul style="list-style-type: none"> · Input : China 100-240V AC, 50/60Hz USA 125V AC, 50/60Hz · Output : China 100-240V AC, 10A Max.,50/60Hz USA 125V AC, 10A Max.,50/60Hz · Socket : NEMA 1-15R x 2 · Transmission Distance : 75M (Line of Sight) · Wireless or Touch Control : ON and OFF · Protection : OVP / OCP / OTP / SCP · Usage : Indoor · This product must be used with ePatron

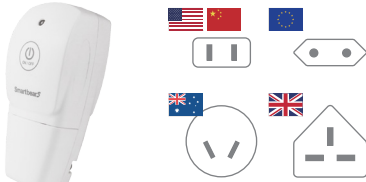

Wireless Control Wall Switch Motor Contro	Wireless Control Smart Adapter
 <p>P/N : WS-494-3B  </p> <p> 86 (L) x 86 (W) x 27 (H) mm  120 (L) x 116 (W) x 27 (H) mm</p> <p>Specifications</p> <ul style="list-style-type: none"> · Input : China 100-240V AC, 50/60Hz USA 125V AC, 50/60Hz · Transmission Distance : 75M (Line of Sight) · Control : Tirai listrik, Pintu garasi listrik, Pendorong jendela listrik · Protection : OVP / OCP / OTP / SCP · Usage : Indoor · This product must be used with ePatron 	 <p>P/N : WS-417  WS-037-E </p> <p>Specifications</p> <ul style="list-style-type: none"> · Input : China 100-240V AC, 50/60Hz USA 125V AC, 50/60Hz · Output : China 100-240V AC, 10A Max.,50/60Hz USA 125V AC, 10A Max.,50/60Hz · Plug : China 3P / USA NEMA 5-15P · Socket : China 2P 、3P / USA NEMA 5-15R x 1 · Transmission Distance : 75M (Line of Sight) · Wireless or Touch Control : ON and OFF · Protection : OVP / OCP / OTP / SCP · Usage : Indoor · This product must be used with ePatron

Wireless Control In-Line Switch	15A Wireless Control In-Line Switch
 <p>P/N : WS-473  </p> <p>Specifications</p> <ul style="list-style-type: none"> · Input : 100-240V AC, 2A Max.,50/60Hz · Output : 100-240V AC, 2A Max.,50/60Hz · Plug : China 2PIN / USA 2PIN / EU 2PIN / UK 2PIN / IEC C7 · Socket : China 2PIN / USA 2PIN / EU 2PIN / UK 2PIN / IEC C5 · Transmission Distance : 75M (Line of Sight) · Wireless or Touch Control : ON and OFF · Protection : OVP / OCP / OTP / SCP · Usage : Indoor · This product must be used with ePatron 	 <p>P/N : WS-227-3  </p> <p>Specifications</p> <ul style="list-style-type: none"> · Input : 100-240V AC, 15A Max.,50/60Hz · Output : 100-240V AC, 15A Max.,50/60Hz · Plug : China 3PIN / USA 3PIN / EU 3PIN / UK 3PIN / IEC C13 · Socket : China 3PIN / USA 3PIN / EU 3PIN / UK 3PIN · Transmission Distance : 75M (Line of Sight) · Wireless or Touch Control : ON and OFF · Protection : OVP / OCP / OTP / SCP · Usage : Indoor · This product must be used with ePatron

Wireless Control Smart Plug-DIY Type	Wireless Control Power Strip-5 Ports
<div data-bbox="151 156 517 338">  </div> <div data-bbox="161 373 472 399"> <p>P/N : WS-015D-25  WS-001B-52 </p> </div> <div data-bbox="109 424 210 443"> <p>Specifications</p> </div> <div data-bbox="109 453 488 679"> <ul style="list-style-type: none"> · Input : 100-240V~ 0.35 A 50 / 60Hz · Output : 2A 250V~ / 4A 125V~, 500W MAX · Plug : China 2PIN / USA 2PIN / EU 2PIN / UK 2PIN · Transmission Distance : 75M (Line of Sight) · Wireless or Touch Control : ON and OFF · Protection : OVP / OCP / OTP / SCP · Usage : Indoor · This product must be used with ePatro </div> <div data-bbox="141 694 490 738"> <p>Replace traditional electrical plugs and easily upgrade smart home appliances</p> </div>	<div data-bbox="576 172 1028 325">  </div> <div data-bbox="580 335 1016 389"> <p>NEMA 5-15R NEMA 1-15R P/N : *0.5M WS-001F+002+161-43 P/N : *0.5M WS-001F+002+109-88</p> </div> <div data-bbox="591 424 692 443"> <p>Specifications</p> </div> <div data-bbox="591 459 1001 735"> <ul style="list-style-type: none"> · Input : 100-240V AC, 50/60Hz · Output : 100-240V AC, 10A Max.,50/60Hz · AC outlet : NEMA 5-15R x 5 / NEMA 1-15R x 5 / China 2PIN x 5 · Transmission Distance : 75M (Line of Sight) · Wireless or Touch Control : ON and OFF · Protection : OVP / OCP / OTP / SCP · Usage : Indoor · This product must be used with ePatron </div>

Wireless Control Power Strip-3 Ports	Wireless Control Power Strip-4 Ports
<div data-bbox="196 911 425 1098">  </div> <div data-bbox="217 1123 413 1142"> <p>P/N : WS-001B-42+161-15</p> </div> <div data-bbox="109 1157 210 1176"> <p>Specifications</p> </div> <div data-bbox="109 1185 432 1471"> <ul style="list-style-type: none"> · Input : 100-240V AC, 50/60Hz · Output : 100-240V AC, 10A Max.,50/60Hz · Plug : NEMA 5-15P · AC outlet : NEMA 5-15R x 3 · Transmission Distance : 75M (Line of Sight) · Wireless or Touch Control : ON and OFF · There is a main power switch on the plug · Protection : OVP / OCP / OTP / SCP · Usage : Indoor · This product must be used with ePatron </div>	<div data-bbox="680 908 929 1102">  </div> <div data-bbox="704 1123 893 1142"> <p>P/N : WS-001B-42+161-5</p> </div> <div data-bbox="591 1157 692 1176"> <p>Specifications</p> </div> <div data-bbox="591 1185 917 1471"> <ul style="list-style-type: none"> · Input : 100-240V AC, 50/60Hz · Output : 100-240V AC, 10A Max.,50/60Hz · Plug : NEMA 5-15P · AC outlet : NEMA 5-15R x 4 · Transmission Distance : 75M (Line of Sight) · Wireless or Touch Control : ON and OFF · There is a main power switch on the plug · Protection : OVP / OCP / OTP / SCP · Usage : Indoor · This product must be used with ePatron </div>

Wireless Control Power Strip-6 Ports	Wireless Control Power Strip-4 Ports
 <p>P/N : WS-001B-42+161-18</p> <p>Specifications</p> <ul style="list-style-type: none"> · Input : 100-240V AC, 50/60Hz · Output : 100-240V AC, 10A Max.,50/60Hz · Plug : NEMA 5-15P · AC outlet : NEMA 5-15R x 6 · Transmission Distance : 75M (Line of Sight) · Wireless or Touch Control : ON and OFF · There is a main power switch on the plug · Protection : OVP / OCP / OTP / SCP · Usage : Indoor · This product must be used with ePatron 	 <p>P/N : WS-015D-13+251-7</p> <p>Specifications</p> <ul style="list-style-type: none"> · Input : 100-240V AC, 50/60Hz · Output : 100-240V AC, 10A Max.,50/60Hz · Plug : China 3PIN · AC outlet : China 2PIN x 2 / China 3PIN x 3 · Transmission Distance : 75M (Line of Sight) · Wireless or Touch Control : ON and OFF · There is a main power switch on the plug · Protection : OVP / OCP / OTP / SCP · Usage : Indoor · This product must be used with ePatron

Wireless Control Power Strip-5 Ports	Wireless Control Power Strip-5 Ports
 <p>WS-015D-13+251-9</p> <p>Specifications</p> <ul style="list-style-type: none"> · Input : 100-240V AC, 50/60Hz · Output : 100-240V AC, 10A Max.,50/60Hz · Plug : China 3PIN · AC outlet : China 2PIN x 2 / China 3PIN x 3 · Transmission Distance : 75M (Line of Sight) · Wireless or Touch Control : ON and OFF · There is a main power switch on the plug · Protection : OVP / OCP / OTP / SCP · Usage : Indoor · This product must be used with ePatron 	 <p>P/N : WS-012-4+205</p> <p>Specifications</p> <ul style="list-style-type: none"> · Input : 100-240V AC, 50/60Hz · Output : 100-240V AC, 10A Max.,50/60Hz · Plug : UK 3PIN · AC outlet : UK 3PIN x 5 · Transmission Distance : 75M (Line of Sight) · Wireless or Touch Control : ON and OFF · There is a main power switch on the plug · Protection : OVP / OCP / OTP / SCP · Usage : Indoor · This product must be used with ePatron

Wireless Control Power Strip-3 Ports	Wireless Control E27 / E26 Lamp Adapter
<div data-bbox="182 148 442 351" data-label="Image"> </div> <div data-bbox="240 368 393 387" data-label="Text"> <p>P/N : WS-010-8+203</p> </div> <div data-bbox="109 438 210 458" data-label="Section-Header"> <p>Specifications</p> </div> <div data-bbox="109 467 433 750" data-label="List-Group"> <ul style="list-style-type: none"> · Input : 100-240V AC, 50/60Hz · Output : 100-240V AC, 10A Max.,50/60Hz · Plug : EU 3PIN · AC outlet : EU 3PIN x 3 · Transmission Distance : 75M (Line of Sight) · Wireless or Touch Control : ON and OFF · There is a main power switch on the plug · Protection : OVP / OCP / OTP / SCP · Usage : Indoor · This product must be used with ePatron </div>	<div data-bbox="756 164 843 351" data-label="Image"> </div> <div data-bbox="749 368 852 387" data-label="Text"> <p>P/N : WS-469</p> </div> <div data-bbox="593 438 694 458" data-label="Section-Header"> <p>Specifications</p> </div> <div data-bbox="593 467 917 722" data-label="List-Group"> <ul style="list-style-type: none"> · Dimension : Ø39.7 x 94.6 mm · Input : 100-240V AC, 50/60Hz · Output : 100-240V AC, 1A Max.,50/60Hz · Base type : E26 / E27 · Transmission Distance : 75M (Line of Sight) · Wireless Control : ON and OFF · Protection : OVP / OCP / OTP / SCP · Usage : Indoor · This product must be used with ePatron </div>

Wireless Control E27 / E26 Lamp Socket	Wireless Control Switch Set - AC to AC
<div data-bbox="210 901 420 1074" data-label="Image"> </div> <div data-bbox="266 1125 368 1144" data-label="Text"> <p>P/N : WS-468</p> </div> <div data-bbox="109 1157 210 1176" data-label="Section-Header"> <p>Specifications</p> </div> <div data-bbox="109 1185 433 1441" data-label="List-Group"> <ul style="list-style-type: none"> · Dimension : Ø110 x 61.5 mm · Input : 100-240V AC, 50/60Hz · Output : 100-240V AC, 1A Max.,50/60Hz · Base type : E26 / E27 · Transmission Distance : 75M (Line of Sight) · Wireless Control : ON and OFF · Protection : OVP / OCP / OTP / SCP · Usage : Indoor · This product must be used with ePatron </div>	<div data-bbox="655 917 946 1077" data-label="Image"> </div> <div data-bbox="740 1125 856 1144" data-label="Text"> <p>P/N : WS-471-1</p> </div> <div data-bbox="593 1157 694 1176" data-label="Section-Header"> <p>Specifications</p> </div> <div data-bbox="593 1185 953 1417" data-label="List-Group"> <ul style="list-style-type: none"> · Dimension : 254 (L) x 114.8 (W) x 29.5 ((H) mm · Input : 100-240V AC, 50/60Hz · Output : 100-240V AC, 10A Max.,50/60Hz · Transmission Distance : 75M (Line of Sight) · Wireless or Touch Control : ON and OFF · Five switches can control each loop power supply · Protection : OVP / OCP / OTP / SCP · Usage : Indoor · This product must be used with ePatron </div>



eDISON Wireless Control Dimmable LED



Smart control of home lighting equipment, so that lighting become smarter

- Mobile phone remote control lighting, and timing automatic switch Settings.
- Adjust light and shade as you wish to meet the needs of different occasions.
- LED bulbs consume less power and last longer.
- Anytime and anywhere to control the use of light power, finger can save your wallet and the earth, energy saving and convenient.
- Product type appearance can be arbitrarily increased, only unexpected not to do.
- This series of products must be used with ePatron (smart hub)

3W Wireless Control RGB LED Bulb	7W Wireless Control RGB LED Bulb
<div data-bbox="281 188 350 343" data-label="Image"> </div> <p data-bbox="250 370 384 387">P/N : BB70522RA</p> <p data-bbox="109 399 209 416">Specifications</p> <ul data-bbox="109 430 519 738" style="list-style-type: none"> · Dimension : Ø 50 x 113 mm · Input : 100-240V AC, 50/60Hz · Light color : Cold white, Warm white, RGB · Base type : E26 / E27 · Wattage : 3W (max) · Color Temperature : 3000K / 6000K · Transmission Distance : 75M (Line of Sight) · Wireless Control lighting : ON and OFF, Dimming light color · Usage : Indoor · This product must be used with ePatron 	<div data-bbox="751 172 852 347" data-label="Image"> </div> <p data-bbox="733 370 866 387">P/N : BB70712RA</p> <p data-bbox="592 399 692 416">Specifications</p> <ul data-bbox="592 430 1002 738" style="list-style-type: none"> · Dimension : Ø 65 x 120 mm · Input : 100-240V AC, 50/60Hz · Light color : Cold white, Warm white, RGB · Base type : E26 / E27 · Wattage : 7W (max) · Color Temperature : 3000K / 6000K · Transmission Distance : 75M (Line of Sight) · Wireless Control lighting : ON and OFF, Dimming light color · Usage : Indoor · This product must be used with ePatron

13W Wireless Control RGB LED Bulb	9W Wireless Control RGB LED Downlight
<div data-bbox="258 898 372 1074" data-label="Image"> </div> <p data-bbox="243 1106 388 1123">P/N : BB71332RA-1</p> <p data-bbox="109 1134 209 1152">Specifications</p> <ul data-bbox="109 1166 519 1474" style="list-style-type: none"> · Dimension : Ø 95 x 149 mm · Input : 100-240V AC, 50/60Hz · Light color : Cold white, Warm white, RGB · Base type : E26 / E27 · Wattage : 13W (max) · Color Temperature : 3000K / 6000K · Transmission Distance : 75M (Line of Sight) · Wireless Control lighting : ON and OFF, Dimming light color · Usage : Indoor · This product must be used with ePatron 	<div data-bbox="734 898 841 1074" data-label="Image"> </div> <p data-bbox="734 1106 863 1123">P/N : WS-465-9R</p> <p data-bbox="592 1134 692 1152">Specifications</p> <ul data-bbox="592 1166 1002 1474" style="list-style-type: none"> · Dimension : Ø146 X 84 mm · Input : 100-240V~ 50/60Hz 0.15A · Light color : Cold white, Warm white, RGB · Mounting Hole Size : Ø 120mm · Wattage : 9W (max) · Color Temperature : 2800K / 6000K · Transmission Distance : 75M (Line of Sight) · Wireless Control lighting : ON and OFF, Dimming light color · Usage : Indoor · This product must be used with ePatron

8W Wireless Control RGB T8 LED Tube	16W Wireless Control RGB T8 LED Tube
 <p>P/N : SMBW033CW</p> <p>Specifications</p> <ul style="list-style-type: none"> · Dimension : 2 feet / 600 mm · Input : 100-240V AC, 50/60Hz · Light color : Cold white, Warm white, RGB · Wattage : 8W (max) · Color Temperature : 3000K / 6000K · Transmission Distance : 75M (Line of Sight) · Wireless Control lighting : ON and OFF, Dimming light color · Usage : Indoor · This product must be used with ePatron 	 <p>P/N : SMBW034CW</p> <p>Specifications</p> <ul style="list-style-type: none"> · Dimension : 4 feet / 600 mm · Input : 100-240V AC, 50/60Hz · Light color : Cold white, Warm white, RGB · Wattage : 16W (max) · Color Temperature : 3000K / 6000K · Transmission Distance : 75M (Line of Sight) · Wireless Control lighting : ON and OFF, Dimming light color · Usage : Indoor · This product must be used with ePatron

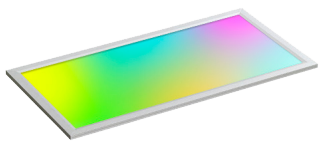40W Wireless Control LED RGB Panel Light	36W Wireless Control LED RGB Panel Light
 <p>P/N : SMBW057WH</p> <p>Specifications</p> <p>LED RGB Panel Light</p> <ul style="list-style-type: none"> · Dimension : 600 x 600 x 15 mm · Weight : 2.3Kg · Input : 100-240V AC, 50/60Hz · Light color : Cold white, Warm white, RGB · Wattage : 40W (max) · Color Temperature : 3000K / 6000K · Transmission Distance : 75M (Line of Sight) · Wireless Control lighting : ON and OFF, Dimming light color · Usage : Indoor Control Wall Switch · Dimension : 114.4 (L) x 114.4 (W) x 57.8 (H) mm · Input : 100-277V AC, 50/60Hz · Output : 100-277V AC, 2A Max., 50/60Hz · Usage : Indoor · This product must be used with ePatron 	 <p>P/N : SMBW057WH</p> <p>Specifications</p> <p>LED RGB Panel Light</p> <ul style="list-style-type: none"> · Dimension : 600 x 1200 x 15 mm · Weight : 3.5Kg · Input : 100-240V AC, 50/60Hz · Light color : Cold white, Warm white, RGB · Wattage : 36W (max) · Color Temperature : 3000K / 6000K · Transmission Distance : 75M (Line of Sight) · Wireless Control lighting : ON and OFF, Dimming light color · Usage : Indoor Control Wall Switch · Dimension : 114.4 (L) x 114.4 (W) x 57.8 (H) mm · Input : 100-277V AC, 50/60Hz · Output : 100-277V AC, 2A Max., 50/60Hz · Usage : Indoor · This product must be used with ePatron

Wireless Control LED RGB Lightstrip



1.2m

P/N : WS-473-2

Specifications

- Lightstrip Dimension : 1200 mm \pm 30 mm
- Input : 100-277V AC, 50/60Hz
- Light color : Cold white, Warm white, RGB
- Wattage : 3W (max)
- Color Temperature : 3000K / 6000K
- Transmission Distance : 75M (Line of Sight)
- Wireless Control lighting : ON and OFF, Dimming light color
- Usage : Indoor
- This product must be used with ePatron



2m

P/N : WS-473-2

Specifications

- Lightstrip Dimension : 2000 mm \pm 30 mm
- Input : 100-277V AC, 50/60Hz
- Light color : Cold white, Warm white, RGB
- Wattage : 3W (max)
- Color Temperature : 3000K / 6000K
- Transmission Distance : 75M (Line of Sight)
- Wireless Control lighting : ON and OFF, Dimming light color
- Usage : Indoor
- This product must be used with ePatron

Wireless Control Switch Set-W/5pcs of T8 LED Tube



P/N : WS-474



10W

Specifications

- T8 Dimension : 2 feet / 600 mm
- Switch Dimension : 222 x 118 x 48 mm
- Input : AC 100-240V 50/60Hz
- Single circuit output : 60V Max., DC / 0.3A 18W
- Total output : 18W x 5 / 90W Max.
- T8 LED Wattage : 10W (max)
- Light color : Cold white, Warm white
- Color Temperature : 3000K / 6000K
- Transmission Distance : 75M (Line of Sight)
- Wireless or Touch Control : ON and OFF, Dimming
- Control box panel : 1 master switch on the right, 5 dimming buttons for independent control on the left
- The product contains 5 LED lights
- Usage : Indoor
- This product must be used with ePatron



P/N : WS-474



20W

Specifications

- T8 Dimension : 4 feet / 1200 mm
- Switch Dimension : 222 x 118 x 48 mm
- Input : AC 100-240V 50/60Hz
- Single circuit output : 60V Max., DC / 0.3A 18W
- Total output : 18W x 5 / 90W Max.
- T8 LED Wattage : 20W (max)
- Light color : Cold white, Warm white
- Color Temperature : 3000K / 6000K
- Transmission Distance : 75M (Line of Sight)
- Wireless or Touch Control : ON and OFF, Dimming
- Control box panel : 1 master switch on the right, 5 dimming buttons for independent control on the left
- The product contains 5 LED lights
- Usage : Indoor
- This product must be used with ePatron

Wireless Control Switch Set-W/5pcs of LED Downlight



P/N : WS-474

Specifications

- Downlight Dimension : Ø 146 x 142.3 mm
- Switch Dimension : 222 x 118 x 48 mm
- Input : AC 100-240V 50/60Hz
- Single circuit output : 60V Max., DC / 0.3A 18W
- Total output : 18W x 5 / 90W Max.
- Downlight Wattage : 9W (max)
- Light color : Cold white, Warm white
- Color Temperature : 3000K / 6000K
- Transmission Distance : 75M (Line of Sight)
- Wireless or Touch Control : ON and OFF, Dimming
- Control box panel : 1 master switch on the right, 5 dimming buttons for independent control on the left
- The product contains 5 LED lights
- Usage : Indoor
- This product must be used with ePatron



P/N : WS-474

Specifications

- Downlight Dimension : Ø 195 x 142.3 mm
- Switch Dimension : 222 x 118 x 48 mm
- Input : AC 100-240V 50/60Hz
- Single circuit output : 60V Max., DC / 0.3A 18W
- Total output : 18W x 5 / 90W Max.
- Downlight Wattage : 15W (max)
- Light color : Cold white, Warm white
- Color Temperature : 3000K / 6000K
- Transmission Distance : 75M (Line of Sight)
- Wireless or Touch Control : ON and OFF, Dimming
- Control box panel : 1 master switch on the right, 5 dimming buttons for independent control on the left
- The product contains 5 LED lights
- Usage : Indoor
- This product must be used with ePatron



P/N : WS-227-2+WS-465-1W

Specifications

- Downlight Dimension : Ø 52 x 17 mm
- Switch Dimension : 120 X 50 X 30 mm
- Input : AC 100~240V 50/60Hz 0.35A 30W Max
- Output : DC 3~20V 0.25A Max
- Downlight Wattage : 1W (max)
- Light color : Cold white, Warm white
- Color Temperature : 3000K / 6000K
- Transmission Distance : 75M (Line of Sight)
- Wireless or Control : ON and OFF
- The product contains 5 LED lights
- Usage : Indoor
- This product must be used with ePatron



P/N : WS-227-2+WS-465-5W

Specifications



- Downlight Dimension : Ø 114 x 36 mm
- Switch Dimension : 120 X 50 X 30 mm
- Input : AC 100~240V 50/60Hz 0.35A 30W Max
- Output : DC 3~20V 0.25A Max
- Downlight Wattage : 5W (max)
- Light color : Cold white, Warm white
- Color Temperature : 3000K / 6000K
- Transmission Distance : 75M (Line of Sight)
- Wireless or Control : ON and OFF
- The product contains 5 LED lights
- Usage : Indoor
- This product must be used with ePatron





eMUZ Wireless Control Lighting & Audio Bluetooth Speaker

High quality Bluetooth speaker + LED adjustable light, visual and auditory double benefits !

- Combine LED dimmable lamp and Bluetooth speaker.
- High-power and high-quality stereo Bluetooth speakers give you hilly feeling.
- The volume can be dimmed and controlled by mobile devices such as mobile phones.
- Three remote control switch mode, convenient and energy saving.
- This series of products must be used with ePatron (smart hub)



Wireless Control Dimmable LED Light Bulb W/ Bluetooth Speaker	Wireless Control Dimmable LED Light Bulb W/ Bluetooth Speaker - Stereo
 <p>P/N : WS-462-C / WS-462-W</p> <p>Specifications</p> <ul style="list-style-type: none"> · Dimension : Ø 95 X 149 mm · Input : 100-240V AC 50 / 60Hz 0.45A Max · Light color : Cold white, Warm white · Base type : E26 / E27 · Wattage : 15W (max) · Color Temperature : 3000K / 6000K · Protection : OVP / OCP / OTP / SCP · Transmission Distance : 75M (Line of Sight) · Wireless Control lighting : ON and OFF, Dimming light · Support : Bluetooth 4.0 + EDR · Bluetooth Range : 10M (Line of Sight) · Usage : Indoor · This product must be used with ePatron 	 <p>P/N : WS-462W-R / WS-462W-L</p> <p>Specifications</p> <ul style="list-style-type: none"> · Dimension : Ø 95 X 149 mm · Input : 100-240V AC 50 / 60Hz 0.45A Max · Light color : Cold white, Warm white · Base type : E26 / E27 · Wattage : 15W + 15W (max) · Color Temperature : 3000K / 6000K · Protection : OVP / OCP / OTP / SCP · Transmission Distance : 75M (Line of Sight) · Wireless Control lighting : ON and OFF, Dimming light · Support : Bluetooth 4.0 + EDR · Bluetooth Range : 10M (Line of Sight) · Usage : Indoor · This product must be used with ePatron

Wireless Control RGB LED Light Bulb W / Bluetooth Speaker	Wireless Control RGB LED Light Bulb W / Bluetooth Speaker - Stereo
 <p>P/N : WS-462</p> <p>Specifications</p> <ul style="list-style-type: none"> · Dimension : Ø 95 X 149 mm · Input : 100-240V AC 50 / 60Hz 0.45A Max · Light color : RGB · Base type : E26 / E27 · Wattage : 15W (max) · Color Temperature : 3000K / 6000K · Protection : OVP / OCP / OTP / SCP · Transmission Distance : 75M (Line of Sight) · Wireless Control lighting : ON and OFF, Dimming light color · Support : Bluetooth 4.0 + EDR · Bluetooth Range : 10M (Line of Sight) · Usage : Indoor · This product must be used with ePatron 	 <p>P/N : WS-462 x 2</p> <p>Specifications</p> <ul style="list-style-type: none"> · Dimension : Ø 95 X 149 mm · Input : 100-240V AC 50 / 60Hz 0.45A Max · Light color : RGB · Base type : E26 / E27 · Wattage : 15W+15W (max) · Color Temperature : 3000K / 6000K · Protection : OVP / OCP / OTP / SCP · Transmission Distance : 75M (Line of Sight) · Wireless Control lighting : ON and OFF, Dimming light color · Support : Bluetooth 4.0 + EDR · Bluetooth Range : 10M (Line of Sight) · Usage : Indoor · This product must be used with ePatron


Wireless Control Dimmable LED Downlight W/ Bluetooth Stereo Speakers	Wireless Control Dimmable LED Downlight W/ Bluetooth Stereo Speakers - Stereo
 <p>P/N : WS-467-C / WS-467-W</p> <p>Specifications</p> <ul style="list-style-type: none"> · Dimension : Ø195 x 142 x 68 mm · Mounting Hole Size : Ø 120mm · Input : 100-240V~ 50/60Hz 0.45A max · Light color : Cold white, Warm white · Wattage : 15W (max) · Color Temperature : 3000K / 6000K · Protection : OVP / OCP / OTP / SCP · Transmission Distance : 75M (Line of Sight) · Wireless Control lighting : ON and OFF, Dimming light · Support : Bluetooth 4.0 + EDR · Bluetooth Range : 10M (Line of Sight) · Usage : Indoor · This product must be used with ePatron 	 <p>P/N : WS-467-W-R / WS-467-W-L</p> <p>Specifications</p> <ul style="list-style-type: none"> · Dimension : Ø195 x 142 x 68 mm · Mounting Hole Size : Ø 120mm · Input : 100-240V~ 50/60Hz 0.45A max · Light color : Cold white, Warm white · Wattage : 15W+15W (max) · Color Temperature : 3000K / 6000K · Protection : OVP / OCP / OTP / SCP · Transmission Distance : 75M (Line of Sight) · Wireless Control lighting : ON and OFF, Dimming light · Support : Bluetooth 4.0 + EDR · Bluetooth Range : 10M (Line of Sight) · Usage : Indoor · This product must be used with ePatron

Wireless Control RGB LED Downlight W / Bluetooth Speaker	Wireless Control RGB LED Downlight W / Bluetooth Speaker - Stereo
 <p>P/N : WS-467</p> <p>Specifications</p> <ul style="list-style-type: none"> · Dimension : Ø195 x 142 x 68 mm · Mounting Hole Size : Ø 120mm · Input : 100-240V~ 50/60Hz 0.45A max · Light color : RGB · Wattage : 15W (max) · Color Temperature : 3000K / 6000K · Protection : OVP / OCP / OTP / SCP · Transmission Distance : 75M (Line of Sight) · Wireless Control lighting : ON and OFF, Dimming light color · Support : Bluetooth 4.0 + EDR · Bluetooth Range : 10M (Line of Sight) · Usage : Indoor · This product must be used with ePatron 	 <p>P/N : WS-467 x 2</p> <p>Specifications</p> <ul style="list-style-type: none"> · Dimension : Ø195 x 142 x 68 mm · Mounting Hole Size : Ø 120mm · Input : 100-240V~ 50/60Hz 0.45A max · Light color : RGB · Wattage : 15W+15W (max) · Color Temperature : 3000K / 6000K · Protection : OVP / OCP / OTP / SCP · Transmission Distance : 75M (Line of Sight) · Wireless Control lighting : ON and OFF, Dimming light color · Support : Bluetooth 4.0 + EDR · Bluetooth Range : 10M (Line of Sight) · Usage : Indoor · This product must be used with ePatron

Wireless Control Dimmable LED Wall Light W/ Bluetooth Stereo Speakers	Wireless Control Dimmable LED Wall Light W/ Bluetooth Stereo Speakers - Stereo
 <p>P/N : WS-455-2</p> <p>Specifications</p> <ul style="list-style-type: none"> · Dimension : Ø190 X 302 mm · Input : 100-240V~ 50/60Hz 0.4A max · Light color : Cold white, Warm white · Wattage : 17W (max) · Color Temperature : 3000K / 6000K · Protection : OVP / OCP / OTP / SCP · Transmission Distance : 75M (Line of Sight) · Wireless Control lighting : ON and OFF, Dimming light · Support : Bluetooth 4.0 + EDR · Bluetooth Range : 10M (Line of Sight) · Usage : Indoor · This product must be used with ePatron 	 <p>P/N : WS-455W-L / WS-455W-R</p> <p>Specifications</p> <ul style="list-style-type: none"> · Dimension : Ø190 X 302 mm · Input : 100-240V~ 50/60Hz 0.4A max · Light color : Cold white, Warm white · Wattage : 17W+17W (max) · Color Temperature : 3000K / 6000K · Protection : OVP / OCP / OTP / SCP · Transmission Distance : 75M (Line of Sight) · Wireless Control lighting : ON and OFF, Dimming light · Support : Bluetooth 4.0 + EDR · Bluetooth Range : 10M (Line of Sight) · Usage : Indoor · This product must be used with ePatron

Wireless Control RGB LED Wall Light W / Bluetooth Speaker	Wireless Control RGB LED Wall Light W / Bluetooth Speaker - Stereo
 <p>P/N : WS-455</p> <p>Specifications</p> <ul style="list-style-type: none"> · Dimension : Ø190 X 302 mm · Input : 100-240V~ 50/60Hz 0.4A max · Light color : RGB · Wattage : 17W (max) · Color Temperature : 3000K / 6000K · Protection : OVP / OCP / OTP / SCP · Transmission Distance : 75M (Line of Sight) · Wireless Control lighting : ON and OFF, Dimming light color · Support : Bluetooth 4.0 + EDR · Bluetooth Range : 10M (Line of Sight) · Usage : Indoor · This product must be used with ePatron 	 <p>P/N : WS-455 x 2</p> <p>Specifications</p> <ul style="list-style-type: none"> · Dimension : Ø190 X 302 mm · Input : 100-240V~ 50/60Hz 0.4A max · Light color : RGB · Wattage : 17W+17W (max) · Color Temperature : 3000K / 6000K · Protection : OVP / OCP / OTP / SCP · Transmission Distance : 75M (Line of Sight) · Wireless Control lighting : ON and OFF, Dimming light color · Support : Bluetooth 4.0 + EDR · Bluetooth Range : 10M (Line of Sight) · Usage : Indoor · This product must be used with ePatron


eCONTROL

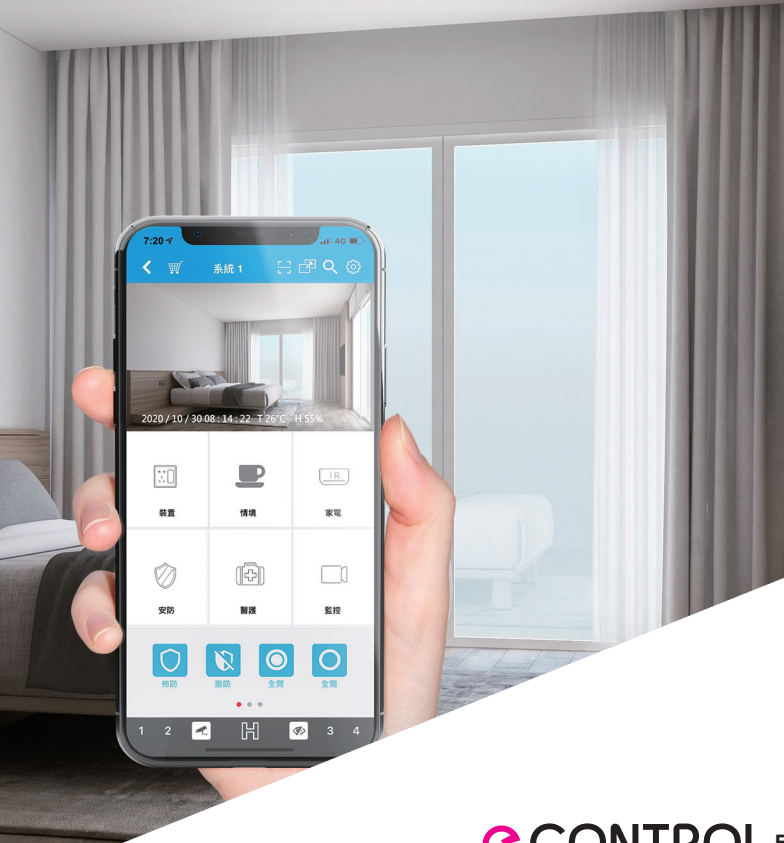






eCONTROL Environment Control

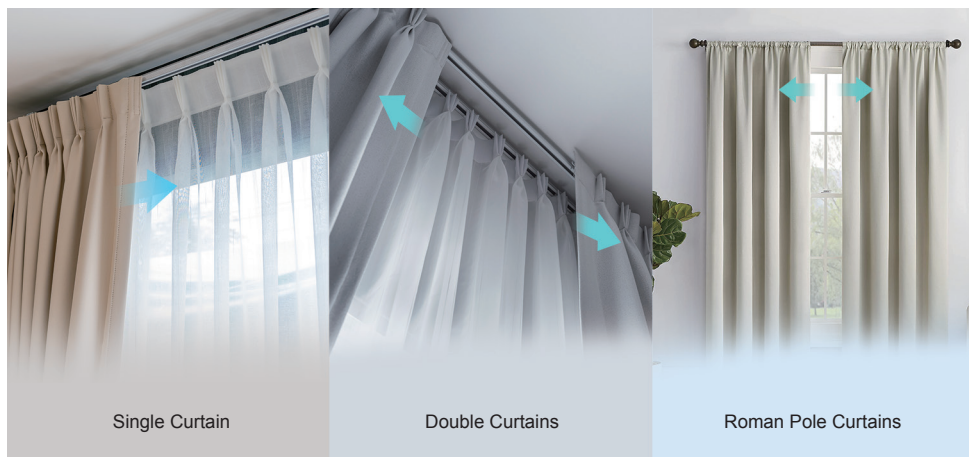Remote environment control, even when you are not at home it can open and close windows, curtains, door locks... etc.

- Adjustable ambient control window, curtain, etc. etc.
- Can set timing scheduling switch window, switch curtain, feeding pets... etc.
- Product variety is diverse, more products under development.
- Can be customized with any manufacturer inner hanging design.
- This series of products must be used with ePatron (smart hub)



AC Wireless Control Motorized Curtain Motor	DC Wireless Control Motorized Curtain Motor
 <p>P/N : WS-472-1</p> <p>Specifications</p> <ul style="list-style-type: none"> · Input : 100-240V~ 0.14A 13W 50/60Hz · Rated Torque : 1.2 Nm · Rated Speed : 14cm/s · Rated Load : 50kg · IP Class : IP40 · Applicable curtain track : T track, I slot, · Transmission Distance : 75M (Line of Sight) · Wireless control the Motorized Curtain OPEN and CLOSE · Usage : Indoor · This product must be used with ePatron 	 <p>P/N : WS-472-2+WS-552</p> <p>With the optional name voice (Open space) or touch buttons on the curtain control box, Control the forward/reverse and on/off of the motor to realize the opening and closing of the curtain.</p> <p>Specification :</p> <ul style="list-style-type: none"> • Protection class : IP40 • Curtain opening and closing : unilateral walking type, left and right bilateral type • Applicable track : internal slot rod, I-rod, Roman rod type is optional <p>WS-552 Curtain opening and closing machine</p> <ul style="list-style-type: none"> · Motor Size : 114 x 57 x 62 mm · Voltage Rating : 7.4V DC · Locked-Rotor Current : 4A · Adjustable travel (factory default travel 60s) <p>WS-472-2 Control Box</p> <ul style="list-style-type: none"> · Input : 12V 1.25A Max · Output : 7.4V 1A Max · Battery Capacity : 1500 mAh <div style="display: flex; justify-content: space-around;">    </div> <div style="display: flex; justify-content: space-around;"> <p>I slot</p> <p>T track</p> <p>Roma pole</p> </div>

Wireless Control Window Set Linear Actuator Type



P/N : WS-476,476-1

Specifications

- Input : 100-240V AC, 50/60Hz
- Output : DC 12V 1.25A
- Controller cable length : 5000 mm
- Power Adapter length : 1500 mm
- Protection : OVP / OCP / OTP / SCP
- Transmission Distance : 75M (Line of Sight)
- Wireless Control : OPEN and CLOSE
- Usage : Indoor
- This product must be used with ePatron

Wireless Control Window Set Pusher Type





P/N : WS-476-3

Specifications

- Input : 100-240V AC, 50/60Hz
- Output : DC 12V 1.25A
- Controller cable length : 5000 mm
- Power Adapter length : 1500 mm
- Protection : OVP / OCP / OTP / SCP
- Transmission Distance : 75M (Line of Sight)
- Wireless Control : OPEN and CLOSE
- Usage : Indoor
- This product must be used with ePatron

Wireless Control Wall Switch Motor Control





P/N : WS-494-3B  

Specifications

- Input : China 100-240V AC, 50/60Hz
USA 125V AC, 50/60Hz
- Transmission Distance : 75M (Line of Sight)
- Control : Tirai listrik, Pintu garasi listrik, Pendorong jendela listrik
- Protection : OVP / OCP / OTP / SCP
- Usage : Indoor
- This product must be used with ePatron




Without Projector Lift

Yale Door Lock - YDM-4109	Yale Door Lock - YDM-3109
 <p>Specifications</p> <ul style="list-style-type: none"> · Lock front Dimension : 68.6(W) × 320.7(H) × 40(D) mm · Behind lock Dimension : 72.8(W) × 306.6(H) × 37(D) mm · Suitable for : wooden door / iron door · Suggest door thickness : 4cm - 9.5cm · Fingerprint recognition : up to 20 groups · Password : 4-10 digits / 30 groups · Backup emergency opening method : 9V emergency backup power supply start power · Spare keys : 2 · Door lock power supply : 4 1.5V alkaline AAA batteries · Controller power supply : DC 5V / 1A · Transmission Distance : 75M (Line of Sight) · Wireless control OPEN door Lock · Usage : Indoor · This product must be used with ePatron 	 <p>Specifications</p> <ul style="list-style-type: none"> · Lock front Dimension : 68.6(W) × 320.7(H) × 40(D) mm · Behind lock Dimension : 72.8(W) × 306.6(H) × 37(D) mm · Suitable for : wooden door / iron door · Suggest door thickness : 4cm - 9.5cm · Cards : 40 · Password : 4-10 digits / 30 groups · Backup emergency opening method : 9V emergency backup power supply start power · Spare keys : 2 · Door lock power supply : 4 1.5V alkaline AAA batteries · Controller power supply : DC 5V / 1A · Transmission Distance : 75M (Line of Sight) · Wireless control OPEN door Lock · Usage : Indoor · This product must be used with ePatron

GATEMAN Door Lock - WF-20	GATEMAN Door Lock - WV-40
 <p>Specifications</p> <ul style="list-style-type: none"> · Lock front Dimension : 67(W) x 171(H) x 35(D) mm · Behind lock Dimension : 144(W) x 90(H) x 37(D) mm · Suitable for : wooden door / iron door · Suggest door thickness : 3cm - 12cm · Fingerprint recognition : up to 20 groups · Password : 4-10 digits / 30 groups · Backup emergency opening method : 9V emergency backup power supply start power · Door lock power supply : 4 1.5V alkaline AAA batteries · Controller power supply : DC 5V / 1A · Transmission Distance : 75M (Line of Sight) · Wireless control OPEN door Lock · Usage : Indoor · This product must be used with ePatron 	 <p>Specifications</p> <ul style="list-style-type: none"> · Lock front Dimension : 60(W) x 175(H) x 19(D) mm · Behind lock Dimension : 145(W) x 90(H) x 45(D) mm · Suitable for : wooden door / iron door · Suggest door thickness : 3cm - 12cm · Cards : 40 · Password : 4-10 digits / 30 groups · Backup emergency opening method : 9V emergency backup power supply start power · Door lock power supply : 4 1.5V alkaline AAA batteries · Controller power supply : DC 5V / 1A · Transmission Distance : 75M (Line of Sight) · Wireless control OPEN door Lock · Usage : Indoor · This product must be used with ePatron

Wireless Control Electric Lock	Wireless Control Electric Mortise Lock
 <p>P/N : WS-015D-27C</p> <p>Specifications</p> <ul style="list-style-type: none"> · Input : 100-240V~ 0.35A 50 / 60Hz · Transmission Distance : 75M (Line of Sight) · Power cord length : 5000 mm · Wireless Control : OPEN door Lock · Protection : OVP / OCP / OTP / SCP · With LED indicator · Usage : Indoor · This product must be used with ePatron 	 <p>P/N : WS-015D-27C</p> <p>Specifications</p> <ul style="list-style-type: none"> · Input : 100-240V~ 0.35A 50 / 60Hz · Transmission Distance : 75M (Line of Sight) · Power cord length : 5000 mm · Wireless Control : OPEN door Lock · Protection : OVP / OCP / OTP / SCP · With LED indicator · Usage : Indoor · This product must be used with ePatron

Wireless Control Powerful Electromagnetic Lock	Wireless Control Electromagnetic Lock
 <p>P/N : WS-015D-27F</p> <p>Specifications</p> <ul style="list-style-type: none"> · Input : 100-240V~ 0.35A 50 / 60Hz · Withstand tension : 250KG · Power cord length : 5000 mm · Transmission Distance : 75M (Line of Sight) · Wireless Control : OPEN door Lock · Protection : OVP / OCP / OTP / SCP · With LED indicator · Usage : Indoor · This product must be used with ePatron 	 <p>P/N : WS-015D-27F</p> <p>Specifications</p> <ul style="list-style-type: none"> · Input : 100-240V~ 0.35A 50 / 60Hz · Withstand tension : 250KG · Power cord length : 5000 mm · Transmission Distance : 75M (Line of Sight) · Wireless Control : OPEN door Lock · Protection : OVP / OCP / OTP / SCP · With LED indicator · Usage : Indoor · This product must be used with ePatron

Wireless Control Door Set



P/N : WS-475 / 475-1

Specifications

- Input : 100-240V~ 0.35A 50 / 60Hz
- Output : DC 12V / 0.75A
- Power cord length : 5000 mm
- Applicable door types :
Automatic Collapsible Door, Rolling Shutter, Fast Rolling Shutter, Garage Door
- Transmission Distance : 75M (Line of Sight)
- Wireless Control : OPEN and Close door Lock
- Protection : OVP / OCP / OTP / SCP
- Operating Temperature/Humidity :
Temperature -10~50°C, Humidity : 5-95% (Unfrozen)
- This product must be used with ePatron



Automatic Collapsible Door



Rolling Shutter



Fast Rolling Shutter



Garage Door

Add-on type IR voice control remoter







P/N : P/N : WS-533A-3

Specifications



- Dimension : 132 (L) x 119 (W) x 69 (H) mm
- Input : 100-240V AC, 50/60Hz , DC 12V.
- Operating System : Android, iOS, PC
- Network Function :
RTSP, TCP / IP, FTP, DHCP, PPPoE, NTP, UPnP, P2P
- Frequency : FSK
- Transmission Consumption : 17dBm
- Language China, Japan, English, Spanish
- Usage : Indoor



Wireless Control Water Valve	Wireless Control Water Valve
 <p>P/N : WS-015D-27A  WS-001B-54A </p> <p>Specifications</p> <ul style="list-style-type: none"> · Input : 100-240V~ 0.35A 50 / 60Hz · Transmission Distance : 75M (Line of Sight) · Power cord length : 5000 mm · Wireless Control : OPEN door Lock · Protection : OVP / OCP / OTP / SCP · With LED indicator · Usage : Indoor · This product must be used with ePatron 	 <p>P/N : WS-015D-27A  WS-001B-54A </p> <p>Specifications</p> <ul style="list-style-type: none"> · Input : 100-240V~ 0.35A 50 / 60Hz · Transmission Distance : 75M (Line of Sight) · Power cord length : 5000 mm · Wireless Control : OPEN door Lock · Protection : OVP / OCP / OTP / SCP · With LED indicator · Usage : Indoor · This product must be used with ePatron

Wireless Control Water Valve	Smart Submersible Pump
 <p>P/N : WS-015D-27A  WS-001B-54A </p> <p>Specifications</p> <ul style="list-style-type: none"> · Input : 100-240V~ 0.35A 50 / 60Hz · Transmission Distance : 75M (Line of Sight) · Power cord length : 5000 mm · Wireless Control : OPEN door Lock · Protection : OVP / OCP / OTP / SCP · With LED indicator · Usage : Indoor · This product must be used with ePatron 	 <p>P/N : WS-015D-27A  WS-001B-54A </p> <p>Specifications</p> <ul style="list-style-type: none"> · Input : 100-240V~ 0.35A 50 / 60Hz · Transmission Distance : 75M (Line of Sight) · Power cord length : 5000 mm · Wireless Control : OPEN door Lock · Protection : OVP / OCP / OTP / SCP · With LED indicator · Usage : Indoor · This product must be used with ePatron



Wireless Control Pet Feeder	Wireless Control Pet waterer
<div></div> <div>P/N : SMBW066WH</div> <div>Specifications<ul style="list-style-type: none">· Dimension : 217(L) x 382(W) x 395(H)mm· Weight : 3.8kg· Input : 100-240V AC, 50/60Hz· Output : DC 5V / 1A· Battery : 1.5V No. 1 battery 4· Feeding barrel capacity : 4.5L· Transmission Distance : 75M (Line of Sight)· Operating Temperature/Humidity : Temperature -10~50°C, Humidity : 5-95% (Unfrozen)· Wireless Control : Feeding· Protection : OVP / OCP / OTP / SCP· Usage : Indoor· This product must be used with ePatron</div>	<div></div> <div>Specifications<ul style="list-style-type: none">· Dimension : Ø 250 x 106 mm· Input : 100-240V AC, 50/60Hz· Output : DC 5V / 1A· Water tank capacity : 3L· Power consumption : 1.5W Max· Transmission Distance : 75M (Line of Sight)· Operating Temperature/Humidity : Temperature -10~50°C, Humidity : 5-95% (Unfrozen)· Wireless Control : Feeding· Protection : OVP / OCP / OTP / SCP· Usage : Indoor· This product must be used with ePatron</div>

Energy Saving ScenarioPlug - Touch Type



P/N : WS-551-5  WS-550-5 

Specifications

- Dimension : 52.5(L) x 40(W) x 49(H) mm
- Input : 100-240V AC, 0.1A MAX 50 / 60Hz
- Transmission Distance : 75M (Line of Sight)
- Usage : Indoor
- This product must be used with ePatron

Energy Saving Scenario Plug - PIR Type



P/N : WS-550-2  WS-551-1 

Specifications

- Dimension : 52.5(L) x 40(W) x 49(H) mm
- Input : 100-240V AC, 0.1A MAX 50 / 60Hz
- Distance : 5-7m
- Angle : 70°-90°
- Transmission Distance : 75M (Line of Sight)
- Usage : Indoor
- This product must be used with ePatron

Energy Saving Scenario Plug - Brightness Type



P/N : WS-551-4  WS-550-4 

Specifications

- Dimension : 52.5(L) x 40(W) x 49(H) mm
- Input : 100-240V AC, 0.1A MAX 50 / 60Hz
- Brightness Control : 20-40 Lux
- Transmission Distance : 75M (Line of Sight)
- Usage : Indoor
- This product must be used with ePatron



Bright type



Dark type

DC Scenario Switch	Temperature and Humidity Sensor
<div data-bbox="210 164 420 367" data-label="Image"> </div> <p data-bbox="258 406 374 427">P/N : WS-537-1</p> <p data-bbox="109 443 219 464">Specifications</p> <ul data-bbox="109 480 459 654" style="list-style-type: none"> · Dimension : Ø65 x 21.2 mm · Battery : DC 3V RC2032 x 2 · Transmission Distance : 75M (Line of Sight) · Usage : Indoor · This product must be used with ePatron 	<div data-bbox="692 156 901 375" data-label="Image"> </div> <p data-bbox="748 406 852 427">P/N : WS-536</p> <p data-bbox="592 443 702 464">Specifications</p> <ul data-bbox="592 472 959 734" style="list-style-type: none"> · Dimension : 340 x 27 x 10.5 mm (Wire included) · Weight : 12g · Humidity Sensor : Polymer Resistive · Power Supply : By IP Cam or Hub · Voltage : 3.3V · Power Consumption : 5.5mW · Sensor Coverage : Temperature - 40°C - +125°C; Humidity 0-100% · Usage : Indoor · This product must be used with ePatron

Water Oxygen Content Detector	
<div data-bbox="191 927 440 1118" data-label="Image"> </div> <p data-bbox="109 1166 212 1187">Specifications</p> <ul data-bbox="109 1203 505 1449" style="list-style-type: none"> · Input : 100-240V~ 0.35A 50 / 60Hz · Measurement range : -2.00~16.00pH, -1999~1999mV · Accuracy : +0.02pH, ±1mV · IP Class : IP40 · Transmission Distance : 75M (Line of Sight) · Protection : OVP / OCP / OTP / SCP · This product must be used with ePatron 	<div data-bbox="557 893 1013 1481" data-label="Image"> </div>







eMEDICAL Medical Care

Create your own smart butler

- Can detect the activity status of elders in the family according to PIR.
- Smart Emergency Bracelet, press the linkage situation immediately inform family members.
- Considerate design of baby cry sensing, once the baby cries, immediately push broadcast message notification.
- Product variety is diverse, more products under development.
- This series of products must be used with ePatron (smart hub)

Smart Emergency Bracelet	Wet Diaper Sensor
<div data-bbox="273 156 360 395" data-label="Image"> </div> <div data-bbox="266 411 369 432" data-label="Text"> <p>P/N : WS-535</p> </div> <div data-bbox="120 470 221 491" data-label="Section-Header"> <p>Specifications</p> </div> <div data-bbox="120 502 443 715" data-label="List-Group"> <ul style="list-style-type: none"> · Dimension : 265 x 38 x 15 mm · Weight : 36g (Battery excluded) · Battery type : CR2032 battery · IP rating : IP44 · Transmission Distance : 75M (Line of Sight) · Usage : Indoor · This product must be used with ePatron </div>	<div data-bbox="725 209 878 392" data-label="Image"> </div> <div data-bbox="779 411 818 432" data-label="Text"> <p>P/N :</p> </div> <div data-bbox="754 541 850 561" data-label="Text"> <p>Coming soon</p> </div>

Baby Noise Sensor	Smart Stationary Sensor-Plug Type
<div data-bbox="135 919 507 1114" data-label="Image"> </div> <div data-bbox="180 1137 458 1163" data-label="Text"> <p>P/N : WS-551-3  WS-550-3 </p> </div> <div data-bbox="120 1204 221 1225" data-label="Section-Header"> <p>Specifications</p> </div> <div data-bbox="120 1240 443 1412" data-label="List-Group"> <ul style="list-style-type: none"> · Dimension : 52.5 x 40 x 49 mm · Input : 100-240V AC, 0.1A MAX 50 / 60Hz · Transmission Distance : 75M (Line of Sight) · Usage : Indoor · This product must be used with ePatron </div>	<div data-bbox="614 919 991 1114" data-label="Image"> </div> <div data-bbox="664 1137 941 1163" data-label="Text"> <p>P/N : WS-551-1  WS-550-1 </p> </div> <div data-bbox="604 1204 702 1225" data-label="Section-Header"> <p>Specifications</p> </div> <div data-bbox="604 1235 912 1449" data-label="List-Group"> <ul style="list-style-type: none"> · Dimension : 52.5(L) x 40(W) x 49(H) mm · Input : 100-240V AC, 0.1A MAX 50 / 60Hz · Distance : 5-7m · Angle : 70°-90° · Transmission Distance : 75M (Line of Sight) · Usage : Indoor · This product must be used with ePatron </div>

amazon echo Accessories



Google Home Accessories



Apple homepod Accessories



BaiDu Smart Speaker Accessories



Tmall Genie AI Smart Speaker Accessories



DingDong Smart Speaker Accessories



Tencent Smart Speaker Accessories



Optical scattering technique

360° Wide range control without dead Angle

All infrared appliances within a range of 10 meters in diameter of 360° can be controlled without a baffle



Add-on type IR voice control remoter Voice Command list



Voice
Command list



Installation
Manual

Activation Key : **KITTY**

Add-on type IR voice control remoter Voice Command list

AC

1	KITTY, AC ON	15	KITTY, WIND STOP	29	KITTY, ROOM TEMPERATURE
2	KITTY, AC OFF	16	KITTY, WIND DOWN	30	KITTY, AC TWENTY-FIVE
3	KITTY, AC ON	17	KITTY, WIND UP	31	KITTY, AC TWENTY-SIX
4	KITTY, AC OFF	18	KITTY, WIND LEFT RIGHT	32	KITTY, AC TWENTY-SEVEN
5	KITTY, LOW SPEED	19	KITTY, WIND RIGHT	33	KITTY, AC TWENTY-EIGHT
6	KITTY, MIDDLE SPEED	20	KITTY, WIND STOP	34	KITTY, AC TWENTY-NINE
7	KITTY, HIGH SPEED	21	KITTY, WIND ROTATION	35	KITTY, AC THIRTY
8	KITTY, AUTO SPEED	22	KITTY, WIND WAGGLE	36	KITTY, MOLD CYCLE
9	KITTY, DEGREE UP	23	KITTY, AC MODE	37	KITTY, WIND SPEED CYCLE
10	KITTY DEGREE DOWN	24	KITTY, HEAT MOLD	38	KITTY, WIND DIRECTION CYCLE
11	KITTY, DEGREE UP	25	KITTY, AIR SUPPLY MOLD		
12	KITTY, DEGREE DOWN	26	KITTY, DEHUMIDIFICATION MODE		
13	KITTY, WIND UP AND DOWN	27	KITTY, AUTO MODE		
14	KITTY, WIND LEFT AND RIGHT	28	KITTY, NORMAL TEMPERATURE		

TV

39	KITTY, TV ON	55	KITTY, VOLUME UP	71	KITTY, LEFT BUTTON
40	KITTY, TV OFF	56	KITTY, VOLUME DOWN	72	KITTY, RIGHT BUTTON
41	KITTY, APPLE ON	57	KITTY, VOLUME UP	73	KITTY, CONFIRMED
42	KITTY, APPLE OFF	58	KITTY, VOLUME DOWN	74	KITTY, BACK
43	KITTY, MI ON	59	KITTY, PREVIOUS CHANEL	75	KITTY, PREVIOUS BUTTON
44	KITTY, MI OFF	60	KITTY, NEXT CHANEL	76	KITTY, NEXT BUTTON
45	KITTY, GOOGLE ON	61	KITTY, PREVIOUS CHANEL	77	KITTY, LEFT BUTTON
46	KITTY, GOOGLE OFF	62	KITTY, NEXT CHANEL	78	KITTY, RIGHT BUTTON
47	KITTY, STB ON	63	KITTY, BUTTON UP	79	KITTY, MENE
48	KITTY, STB OFF	64	KITTY, BUTTON DOWN	80	KITTY, MAIN PAGE
49	KITTY, SIGNAL SOURCE ONE	65	KITTY, BUTTON LEFT	81	KITTY, PREVIOUS PAGE
50	KITTY, SIGNAL SOURCE TWO	66	KITTY, BUTTON RIGHT	82	KITTY, NEXT PAGE
51	KITTY, SIGNAL SOURCE THREE	67	KITTY, BUTTER CONFIRMED	83	KITTY, RETURN
52	KITTY, SIGNAL SORUCE A	68	KITTY, PREVIOUS PAGE	84	KITTY, EXIT
53	KITTY, SIGNAL SORUCE B	69	KITTY, PREVIOUS BUTTON		
54	KITTY, SIGNAL SORUCE C	70	KITTY, NEXT BUTTON		

FAN

85	KITTY, FAN ON
86	KITTY,FAN OFF
87	KITTY, COLD AIR ON
88	KITTY, COLD AIR OFF
89	KITTY, BREEZE ON
90	KITTY, BREEZE OFF
91	KITTY, STRONG WIND ON
92	KITTY, STRONG WIND OFF
93	KITTY, LIGHT WIND ON
94	KITTY, LIGHT WIND OFF
95	KITTY, SWING PINK ON
96	KITTY, SWING OFF
97	KITTY, LIGHT ON

98	KITTY, LIGHT OFF
99	KITTY, EXHAUSE ON
100	KITTY, EXHAUSE OFF
101	KITTY, HEAT AIR ON
102	KITTY, HEAT AIR OFF
103	KITTY, COOL AIR ON
104	KITTY, COOL AIR OFF
105	KITTY, RUSH AIR
106	KITTY,HIGH SPEED AIR
107	KITTY, MIDDLE SPEED AIR
108	KITTY, LOW SPEED AIRE
109	KITTY,NATURAL AIRE
110	KITTY, SLEEPY AIR

111	KITTY, LIGHT AIR
112	KITTY, AIR UP
113	KITTY, AIR DOWN
114	KITTY, STAND FAN ON
115	KITTY, STAND FAN OFF
116	KITTY, CEILING FAN ON
117	KITTY, CEILING FAN OFF
118	KITTY, WIND BOX ON
119	KITTY,WIND BOX OFF
120	KITTY,ICE FAN ON
121	KITTY, ICE FAN OFF

OTHER

122	KITTY, PROJECTOR ON
123	KITTY,PROJECTOR OFF
124	KITTY,VENTIALTOR ON
125	KITTY,VENTILATOR OFF
126	KITTY,FAN HEATER ON
127	KITTY,FAN HEATER OFF
128	KITTY,DEHUMIDIFICATION ON
129	KITTY, DEHUMIDIFICAITON OFF
130	KITTY, LIGHT ON
131	KITTY, LIGHT OFF
132	KITTY,ILLUMINATION ON
133	KITTY,ILLUMINATION OFF
134	KITTY, TURN UP THE LIGHT
135	KITTY, TURN DOWN THE LIGHT
136	KITTY, BRIGHT LIGHT
137	KITTY, SOFT LIGHT
138	KITTY, CLOSE ROLLER BLIND
139	KITTY, OPEN ROLLER BLIND

140	KITTY, CLOSE SCREEN
141	KITTY, OPEN SCREEN
142	KITTY, HANGER UP
143	KITTY,HANGER DOWN
144	KITTY, RIGHT CURTAIN OPEN
145	KITTY, RIGHT CURTAIN CLOSE
146	KITTY, RIGHT CURTAIN STOP
147	KITTY, LEFT CURTAIN OPEN
148	KITTY, LEFT CURTAIN CLOSE
149	KITTY, LEFT CURTAIN STOP
150	KITTY, CURTAIN OPEN
151	KITTY, CURTAIN CLOSE
152	KITTY, CURTAIN STOP
153	KITTY, WORKING ON
154	KITTY, WORKING OFF
155	KITTY, STRONG WIND
156	KITTY, SOFT WIND
157	KITTY, STRONG POWER

158	KITTY, SOFT POWER
159	KITTY, SLOW POWER
160	KITTY, PLEASE ACTIVATE
161	KITTY, PLEASE SWING
162	KITTY, PLEASE RAISE UP
163	KITTY, PLEASE LOWER DOWN
164	KITTY, PLEASE MOVE FORWARD
165	KITTY, PLEASE SETP BACK
166	KITTY, TURN LEFT
167	KITTY, TURN RIGHT
168	KITTY, PAUSE
169	KITTY, STOP
170	KITTY, BE MOTIONLESS
171	KITTY, AIR DRYING ON
172	KITTY,ILLUMINATION ON
173	KITTY,STERILIZE ON
174	KITTY, WASH OFF
175	KITTY, CLEANLINESS ON

OTHER

176	KITTY, MASSAGE CHAIR ON
177	KITTY, MASSAGE CHAIR OFF
178	KITTY, STRONG MASSAGE
179	KITTY, SOFT MASSAGE
180	KITTY, STRONG VIBRATION
181	KITTY, SOFT VIBRATION
182	KITTY, FASTER
183	KITTY, SLOWER
184	KITTY, BACK CUSION UP
185	KITTY, BACK CUSION DOWN
186	KITTY, OPEN THE DOOR
187	KITTY, CLOSE THE DOOR
188	KITTY, TURN ON WATER
189	KITTY, TURN OFF WATER
190	KITTY, MORE WATER

191	KITTY, FLUSH PLEASE
192	KITTY, CURTAIN UP
193	KITTY, CURTAIN DOWN
194	KITTY, STOP THE CURTAIN
195	KITTY, OPEN THE INSIDE CURTAIN
196	KITTY, CLOSE THE INSIDE CURTAIN
197	KITTY, STOP THE INSIDE CURTAIN
198	KITTY, OPEN THE OUTER CURTAIN
199	KITTY, CLOSE THE OUTER CURTAIN
200	KITTY, STOP THE OUTER CURTAIN
201	KITTY, OPEN THE RIGHT WINDOW
202	KITTY, CLOSE THE RIGHT WINDOW
203	KITTY, STOP THE RIGHT WINDOW
204	KITTY, OPEN THE LEFT WINDOW
205	KITTY, CLOSE THE LEFT WINDOW

206	KITTY, STOP THE LEFT WINDOW
207	KITTY, OPEN THE WINDOW
208	KITTY,CLOSE THE WINDOW
209	KITTY,STOP THE WINDOW
210	KITTY, WINDOW UP
211	KITTY, WINDOW DOWN
212	KITTY, STOP WINDOW
213	KITTY, OPEN THE INSIDE WINDOW
214	KITTY, CLOSE THE INSIDE WINDOW
215	KITTY, STOP THE INSIDE WINDOW
216	KITTY, OPEN THE OUTER WINDOW
217	KITTY, CLOSE THE OUTER WINDOW
218	KITTY, STOP THE OUTER WINDOW

SETTING

219	KITTY, REMOTE CONTROL SETTING
220	KITTY, REPEAT COMAND
221	KITTY, LEARN AGAIN

222	KITTY, EXIT SETING
223	KITTY, MY VERSION
224	KITTY, LOUDER

225	KITTY ,LOWER YOUR VOICE
-----	-------------------------

Learning Skills :

1. Please be sure to check the instruction words to be learned from the instruction words on the instruction table first, so that you can enter the learning setting smoothly and time-saving.
2. The best time to press the remote control is after the KITTY says "please press the X key of the remote control to press the KITTY" prompt tone, and then press the corresponding function keys on the remote control.
3. Commonly used infrared remote control is divided into: one key multiple code and one key one code. Note to select the corresponding voice command words when using one key and multiple codes.





The AI can hear you

The built-in name/ optional name voice control products

A single product can help control your home appliance.



The built-in name/ optional name voice control products Single product

LANG.	NO.	RED LED	GREEN LED	BLUE LED	WHITE LED	NAME+COMMAND	Command Example
CN 	①	小红	小绿	小蓝	小白	··开启 /··关闭	小红开启
	②	1 号	2 号	3 号	4 号	··开启 /··关闭	1 号开启
	③	鼠哥	牛哥	虎哥	兔哥	··开启 /··关闭	虎哥开启
ENG 	④	RED	GREEN	BLUE	WHITE	·· ON/··OFF	RED ON
	⑤	ONE	TWO	THREE	FOUR	·· ON/··OFF	ONE ON
	⑥	Monday	Tuesday	Wednesday	Thursday	·· ON/··OFF	Monday ON
	⑦	A	B	C	D	·· ON/··OFF	A ON

Red ON

Tuesday on

Two on

Wednesday off

Four OFF

White on

C off

Optional name voice control series products are very easy to understand and operation, there is 8 voice command to realize smart home voice control system.

The user only needs to voice control or touch the button to control the power supply circuit, and realizing a family or office appliance power switch of various brands ON/OFF.

1.Optional name voice control switch: There are 4 names and total 4 types as above:

Long press 3 seconds, then switch to voice command style, choose the voice command " red on/ green on/ blue on /white on" etc. to set the appliance. If continue long press, will switch to the next voice command.
When setting the optional name, the indicator light on the product is red, green, blue and white will be circular change.

2.The built-in name voice control switch: There are 4 names and total 4 types as above:

The 4 LED indicator are 4 different names.

Scan QR CODE Download
Instruction Manual



® Dongguan Plugo Electric Co., Ltd | Chang Long Control Dist., Hwang Jiang Cheng, Dongguan, Guandong, 523766 China
Well Shin Technology Co.,Ltd | No.196, Xinghu 3rd Rd., Neihu District, Taipei City 114,Taiwan
Service Hotline: +86 13826995493(Dongguan) 80910232715(Taipei) | www.wellshin.com

The built-in name/ optional name voice control products

Use voice commands now to experience a new smart life!



eVOICE Optional name voice control adapters



Name series

○ 小紅	○ 小綠	○ 小藍	○ 小白
○ 1 號	○ 2 號	○ 3 號	○ 4 號
○ 鼠哥	○ 牛哥	○ 虎哥	○ 兔哥
○ RD	○ GN	○ BU	○ WH
○ One	○ Two	○ Three	○ Four
○ Mon.	○ Tue.	○ Wed.	○ Thu.
○ A	○ B	○ C	○ D

P/N: WS-417A

SPECIFICATION:

- Rating :
CN MAX 10A 250V~ 2500W
- Plug: CN 3P
- Socket: CN 3P x 1, 2P x 1
- Optional Name Voice control / Touch control the power ON and OFF.
- With LED indicator.



Name series

○ 小紅	○ 小綠	○ 小藍	○ 小白
○ 1 號	○ 2 號	○ 3 號	○ 4 號
○ 鼠哥	○ 牛哥	○ 虎哥	○ 兔哥
○ RD	○ GN	○ BU	○ WH
○ One	○ Two	○ Three	○ Four
○ Mon.	○ Tue.	○ Wed.	○ Thu.
○ A	○ B	○ C	○ D

P/N: WS-037-E1

产品规格:

- Rating :
US 10A 125V~ 1250W MAX
- Plug: US NEMA 5-15R
- Socket: 2P x 1 / US NEMA 5-15R x 1
- Optional Name Voice control / Touch control the power ON and OFF.
- With LED indicator.

eVOICE Optional name voice control wall Switches



Name series

○ 小紅	○ 小綠	○ 小藍	○ 小白
○ 1 號	○ 2 號	○ 3 號	○ 4 號
○ 鼠哥	○ 牛哥	○ 虎哥	○ 兔哥
○ RD	○ GN	○ BU	○ WH
○ One	○ Two	○ Three	○ Four
○ Mon.	○ Tue.	○ Wed.	○ Thu.
○ A	○ B	○ C	○ D

P/N: WS-340-9B

SPECIFICATION:

- Size: CN 86(L) x 86(W) x 26.6(D) mm
- Input Voltage: 100-240V~,50/60Hz
- Output Power: 2A MAX
- Optional Name Voice control / Touch control the power ON and OFF.
- With LED indicator.



Name series

○ 小紅	○ 小綠	○ 小藍	○ 小白
○ 1 號	○ 2 號	○ 3 號	○ 4 號
○ 鼠哥	○ 牛哥	○ 虎哥	○ 兔哥
○ RD	○ GN	○ BU	○ WH
○ One	○ Two	○ Three	○ Four
○ Mon.	○ Tue.	○ Wed.	○ Thu.
○ A	○ B	○ C	○ D

P/N: WS-345-3B

SPECIFICATION:

- Size: US 115(L) * 70(W) * 26.6(D) mm
- Input Voltage: 100-240V~,50/60Hz
- Output Power: 2A MAX
- Optional Name Voice control / Touch control the power ON and OFF.
- With LED indicator.

The built-in name/ optional name voice control products

Use voice commands now to experience a new smart life!



VOICE Optional name voice control in-line switches



Name series

○ 小紅	小綠	小藍	小白
○ 1 號	2 號	3 號	4 號
○ 鼠哥	牛哥	虎哥	兔哥
○ RD	GN	BU	WH
○ One	Two	Three	Four
○ Mon.	Tue.	Wed.	Thu.
○ A	B	C	D

P/N: WS-472A  

SPECIFICATION:


- Rating :
CN MAX 10A 250V~ 2500W
US MAX 10A 125V~ 1250W
- Plug/Connector: CN 2PIN / US NEMA 1-15P/R
- Length: 60cm
- Optional Name Voice control / Touch control the power ON and OFF.
- With LED indicator.

VOICE Voice 4-control wall Switches



Name series

○ 小紅	小綠	小藍	小白
○ 1 號	2 號	3 號	4 號
○ 鼠哥	牛哥	虎哥	兔哥
○ RD	GN	BU	WH
○ One	Two	Three	Four
○ Mon.	Tue.	Wed.	Thu.
○ A	B	C	D

P/N: WS-494-4B 


SPECIFICATION:

- Size: CN 86(L) x 86(W) x 30(D) mm
- Input: 100-240V~ 50/60Hz
- Output: 100-240V~ 2A MAX/Way 50/60Hz
- Optional Name Voice control / Touch control the power ON and OFF.
- With LED indicator.



Name series

○ 小紅	小綠	小藍	小白
○ 1 號	2 號	3 號	4 號
○ 鼠哥	牛哥	虎哥	兔哥
○ RD	GN	BU	WH
○ One	Two	Three	Four
○ Mon.	Tue.	Wed.	Thu.
○ A	B	C	D

P/N: WS-342-5 

SPECIFICATION:

- Size: US 15(L) * 72(W) * 37(D) mm
- Input: 100-240V~ 50/60Hz
- Output: 100-240V~ 2A MAX/Way 50/60Hz
- Optional Name Voice control / Touch control the power ON and OFF.
- With LED indicator.

The built-in name/ optional name voice control products



Use voice commands now to experience a new smart life!

VOICE 7W voice controlled LED bulb



P/N: BB70715CA


Specification:

- Input : 100-240V AC 50 / 60Hz 0.2A Max
- Size : Ø 65 X 118 mm (+/- 2mm)
- Suitable for lamp holder Ø E27 Ø E26 thread interface lamps, such as table lamps, wall lamps, chandeliers, etc.
- Color: cold Luminous efficiency: 60Lm/W Flux: 420Lm
- Cosj : 0.4 Color: 80 Temp: F6500
- Audio function: built-in speaker 1W8R, monitor built-in MIC
- Language choice: Chinese and English for indoor use only

The name corresponding to the color has been built in the factory and cannot be changed. The LED indicator color on the bulb directly corresponds to the current built-in name.



LANG.	RED LED	GREEN LED	BLUE LED	WHITE LED	NAME + COMMAND	Command Example
CN 	小红	小绿	小蓝	小白	.. 开启 .. 关闭	小红开启 / 小红关闭
	1 号	2 号	3 号	4 号		1 号开启 / 1 号关闭
	鼠哥	牛哥	虎哥	兔哥		虎哥开启 / 虎哥关闭
ENG 	RED	GREEN	BLUE	WHITE	.. ON .. OFF	Red ON / Red OFF
	ONE	TWO	THREE	FOUR		One ON / One OFF
	Monday	Tuesday	Wednesday	Thursday		Monday ON / Monday OFF
	A	B	C	D		A ON / A OFF

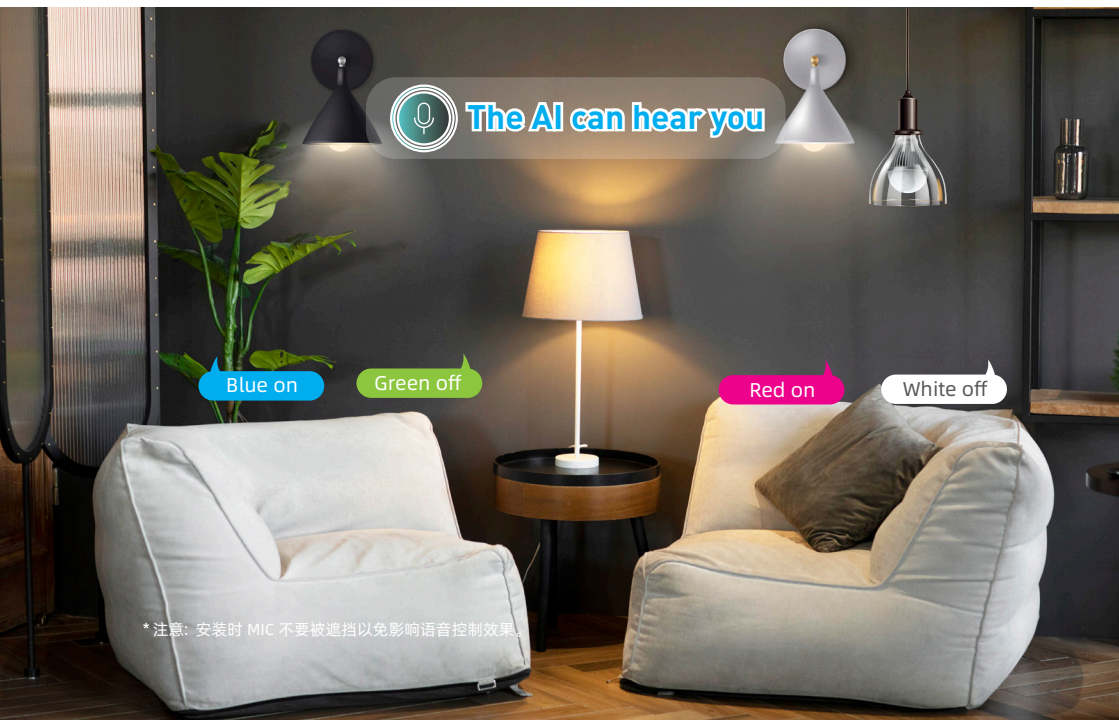

* 注意: 安装时 MIC 不要被遮挡以免影响语音控制效果。

The built-in name/ optional name voice control products

Use voice commands now to experience a new smart life!



VOICE Optional name DC Smart Curtain opening and Closing machine - lightweight



Internal slot rod



I-rod



Roman rod



Curtain opening and closing machine



Optional name voice remote control - plug type



The AI can hear you

With the optional name voice (open space) or touch buttons on the curtain control box, control the forward/reverse and on/off of the motor to realize the opening and closing of the curtain.

Specification:

- Protection class: IP40
- Curtain opening and closing: unilateral walking type, left and right bilateral type
- Applicable track: internal slot rod, I-rod, Roman rod type is optional
- WS-552 Curtain opening and closing machine
- Motor size: 114 x 57 x 62 mm
- Motor weight: 125g
- Voltage rating: 7.4V DC
- Rated current: 0.64A
- Locked-rotor current: 4A
- Rated speed: 33rpm
- Adjustable travel (factory default travel 60s)

WS-472-2 Control Box

- Input: 12V 1.25A Max
- Output: 7.4V 1A Max

- Battery capacity: 1500 mAh

WS-DC-505-N Control line

- Cable length: ○ 1M ○ 1.5M Plug: locked type

- WS-550-6 Optional name voice remote control - Plug type

- Dimension: 52.5(L) x 40(W) x 49(H) mm

- Input: 100-240V AC, 50/60Hz

- Remote distance: 7~10M (open space)

- Transmission range: 75M

- Audio function: built-in speaker 1W8R, monitor built-in MIC

- Each voice remote control can be paired to control 8 curtains at the same time

- Language choice: Chinese, English

NAME + COMMAND

Little red		
Little Green	** curtain open	Command example: Little red, curtain open
Little Blue	** curtain close	
Little White	** curtain stop	

Control box instructions:

1. Manual use

Click the button outward key (↗) to open the curtain, click the button inward key (↘) to open the curtain.

Press any key to stop in motor motion

2. Stroke setting

Press the single key for 3 seconds until the green light flashes quickly, the motor starts to turn after the finger is released, and the motor stops after pressing any key at the appropriate position. At this time, the distance to walk is the set stroke

3. Query the current name and change the name

Query: Short press the double key (trigger indicator red), the light color is the current name after releasing the key

Name change: Before the current indicator light is off, press the double key again, and the light color will be shear to the next color name.

Each time you press the indicator light (according to red/green/blue/white) changes in sequence, the cycle changes color and changes name

4. Configured with voice remote controller

Long press the double key for about 10 seconds until the red light flashes twice, and then enter the state of waiting for voice remote control configuration after release.

Before the red light goes off, say "Matching curtain controller" into the voice remote control (refer to the matching words table on the left)

5. Stroke restores factory Settings

Press and hold the double key until the indicator flashes from red to white, then release and delete the travel setting

6. Restore all states to factory Settings

Press and hold the double key until the indicator flashes red, then white, then blue, then release

*Set/pair/delete the green light flashes twice after the pairing is successful

1A Charging time is about 2.5 hours full. Green light when charging. Full of green lights out; if you can't fill it, the green light flashes.

Paired word

1	Matching curtain controller
2	Remove curtain controller

Manual





The built-in name/ optional name voice control products



Use voice commands now to experience a new smart life!

VOICE Optional name smart window opener

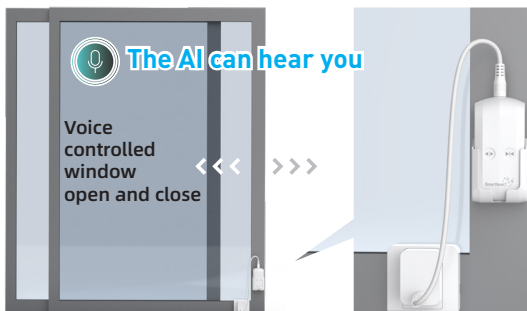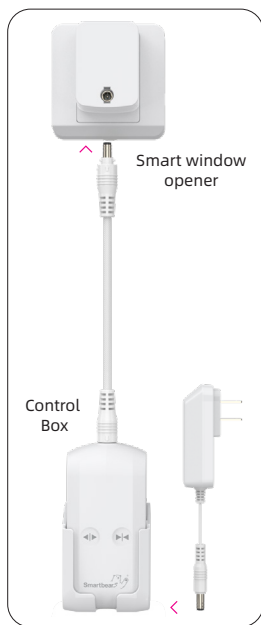

Voice remote control - plug type



Refer to the full instruction on the right

Voice by selectable name (open space) or touch on the control box Key, control the motor forward/reverse and open/stop, to open and or close the window.

NAME +COMMAND

Little red	** open the window	Command example: Little red, open the window
Little Green	** close the window	
Little Blue	** stop the window	
Little White		

Control box instructions:

1.Manual use

Click the button outward key (→) to open the window.
Click the button inward key (←) to open the window.
Press any key to stop in motor motion

2.Stroke setting

Press the single key for 5 seconds until the green light flashes quickly, the motor starts to turn after the finger is released, and the motor stops after pressing any key at the appropriate position. At this time, the distance to walk is the set stroke

3.Query the current name and change the name

Query: Short press the double key (trigger indicator red), the light color is the current name after releasing the key

Name change: Before the current indicator light is off, press the double key again, and the light color will be shear to the next color name. Each time you press the indicator light (according to red/green/blue/white) changes in sequence, the cycle changes color and changes name

4.Configured with voice remote controller

Long press the double key for about 10 seconds until the red light flashes twice, and then enter the state of waiting for voice remote control configuration after release.

Before the red light goes off, say "Matching window controller" into the voice remote control (refer to the matching words table on the left)

Paired word	
1	Matching window controller
2	Remove window controller

5.Stroke restores factory Settings

Press and hold the double key until the indicator flashes from red to white, then release and delete the travel setting

6.Restore all states to factory Settings

Press and hold the double key until the indicator flashes red, then white, then blue, then release

Set/pair/delete the green light flashes twice after the pairing is successful.

1A Charging time is about 2.5 hours full. Green light when charging; Full of green lights out; if you can't fill it, the green light flashes.

Specification:

- Window opening and closing: unilateral walking type, left and right bilateral type
- Applicable windows: movable Windows with sliding rails
- WS-476-1 Smart window opener
 - Dimension: 72 x 73 x 65 mm
 - Weight: 268g
 - Rated current: 12V DC (working rage: 8~12V DC)
 - No-load current: 0.2A max; No-load speed 26±10% rpm;26±10% rpm;
 - Load torque: 6.0Kg.cm; Load current:0.34A max;
 - Load speed:22±10% rpm.
 - Adjustable travel: (factory default travel 60s)
- WS-472-2 Control Box
 - Input: 12V 1.25A Max
 - Output: 7.4V 1A Max
 - Battery capacity: 1500 mAh
- WS-DC-505-N Control Line
 - Cable length: ○ 1M ○ 1.5M
 - Plug: locked type
- WS-550-6A Optional name voice remote control - Plug type
 - Input: 52.5[L] x 40[W] x 49[H] mm
 - Output: 100-240V AC, 50/60Hz
 - Remote distance: 7~10M(open space)
 - Transmission range: 75M
 - Audio function: built-in speaker 1W8R, monitor built-in MIC
 - Each voice remote control can be paired to control 8 curtains at the same time
 - Language choice: Chinese, English

Manual



Add-on type IR Voice control



eVOICE Add-on type IR Voice control curtain opening and closing machine - lightweight



Internal slot rod




I-rod



Roman rod



Curtain opening and closing machine

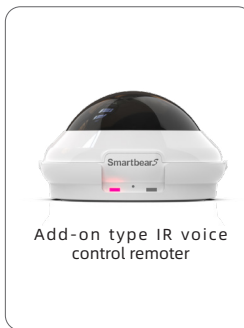

Add-on type IR voice control remote

Specification:

Protection class: IP40

Curtain opening and closing: unilateral walking type, left and right bilateral type

Applicable track: internal slot rod, I-rod, Roman rod type is optional
WS-552 Curtain opening and closing machine

Motor size: 114 x 57 x 62 mm

Motor weight: 125g

Voltage rating: 74V DC

Rated current: 0.64A

Locked-rotor current: 4A

Rated speed: 33rpm

Adjustable travel (factory default travel 60s)

With the Add-on type IR Voice control (open space) or touch buttons on the curtain control box, control the forward/reverse and on/off of the motor to realize the opening and closing of the curtain. Control the forward/reverse and on/off of the motor to realize the opening and closing of the curtain.

WS-472-2 Control Box

Input: 12V 1.25A Max

Output: 74V 1A Max

Battery capacity: 1500 mAh

WS-DC-505-N Control Line

Cable length: 1M 1.5M

Plug: locked type

WS-533A-3 Add-on type IR voice control remote

Dimension: 122 (L) * 123 (W) * 69 (H) mm

Input: DC12V / 1.25A

Infrared irradiation: Ø5 *10 infrared lights

Wave length: 940nm

Frequency: 38KHz

Remote control angle: 360°

Working environment: 0°C ~60°C

Remote distance: 7~10M (open space)

Audio function: built-in speaker 1WBR, monitor built-in MIC

Language choice: Chinese, English



The AI can hear you

Command

Kitty, open the curtain

Kitty, close the curtain

Kitty, stop the curtain

Paired word

1	Kitty, remote control setting
2	Kitty, repeat command
3	Kitty, learn again
4	Kitty, exit setting
5	Kitty, my version
6	Kitty, louder
7	Kitty, lower your voice

Control box instructions:

1. Manual use

Click the button outward key to open the curtain. Click the button inward key to open the curtain. Press any key to stop in motor motion

2. Stroke setting

Press the single key for 5 seconds until the green light flashes quickly, the motor starts to turn after the finger is released, and the motor stops after pressing any key at the appropriate position. At this time, the distance to walk is the set stroke

3. Pair or delete with voice remote controller

Before pairing with the voice remote controller or deleting the use, please pair first, otherwise it is impossible to perform the voice control curtain switch, and dictate the pairing words to the voice remote controller (refer to the pairing words table).

Dictate voice commands

Remote control broadcast

Kitty, remote control setting > Please name the command words you want to learn

Kitty, curtain open > Would you like to use infrared control or wireless control

Wireless control > Please put the curtain controller into pairing mode, then say match curtain or remove curtain

Long press the double key for about 10 seconds until the red light flashes twice, and then enter the state of waiting for voice remote control configuration after release. Before the red light goes off, say it into the voice remote

Match curtain or remove curtain > Have learned, please proceed to the next command word setting

Kitty, exit setting > Exited setting



Manual



4. Stroke restores factory Settings

Press and hold the double key until the indicator flashes from red to white, then release and delete the travel setting

5. Restore all states to factory Settings

Press and hold the double key until the indicator flashes red, then white, then blue, then release



Set/pair/delete/delete the green light flashes twice after the pairing is successful.

1A Charging time is about 2.5 hours full. Green light when charging; Full of green lights out; If you can't fill it, the green light flashes.


Add-on type IR Voice control



VOICE Add-on type IR Voice control smart window opener

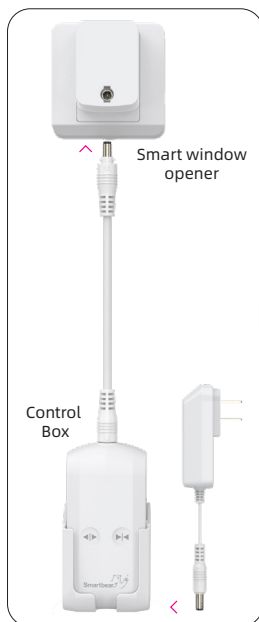

Specification:
 WS-476-1 Smart window opener
 Dimension: 72 x 73 x 65 mm
 Weight: 268g
 Rated current: 12V DC (working range: 8~12V DC)
 No-load current: 0.2A max; No-load speed 26±10% rpm; 26±10% rpm;
 Load torque: 6.0Kg.cm;
 Load current: 0.34A max;
 Load speed: 22±10% rpm.
 Adjustable travel (factory default travel 60s)
 With the Add-on type IR Voice control (open space) or touch buttons on the curtain control box, control the forward/reverse and on/off of the motor to realize the opening and closing of the window. Control the forward/reverse and on/off of the motor to realize the opening and closing of the window.

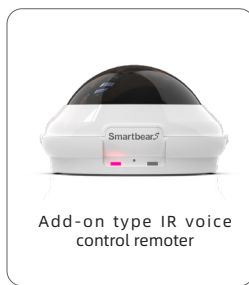

Window opening and closing: unilateral walking type, left and right bilateral type
 Applicable windows: movable Windows with sliding rails
 WS-472-2 Control Box
 Input: 12V 1.25A Max Output: 7.4V 1A Max Battery capacity: 1500 mAh
 WS-DC-505-N Control Line
 Cable length: ∅ 1M ∅ 1.5M Plug: locked type
 WS-533A-3 Add-on type IR Voice control remote
 Dimension: 122 [L] * 123 [W] * 69 [H] mm
 Input: DC12V / 1.25A
 Infrared irradiation: ∅5 *10 infrared lights
 Wave length: 940nm Frequency: 38KHz
 Remote control Angle: 360 Working environment: 0°C ~60°C
 Remote distance: 7~10M (open space)
 Audio function: built-in speaker 1WBR, monitor built-in MIC
 Language choice: Chinese, English

Control box instructions:

1. Manual use

Click the button outward key (→) to open the window. Click the button inward key (←) to open the window. Press any key to stop in motor motion

2. Stroke setting

Press the single key for 5 seconds until the green light flashes quickly, the motor starts to turn after the finger is released, and the motor stops after pressing any key at the appropriate position. At this time, the distance to walk is the set stroke

3. Pair or delete with voice remote controller

Before pairing with the voice remote controller or deleting the use, please pair first, otherwise it is impossible to perform the voice control curtain switch, and dictate the pairing words to the voice remote controller (refer to the pairing words table).

Dictate voice commands Remote control broadcast

- Kitty, remote control setting > Please name the command words you want to learn
- Kitty, window open > Would you like to use infrared control or wireless control
- Wireless control > Please put the window controller into pairing mode, then say match window or remove window

Long press the double key for about 10 seconds until the red light flashes twice, and then enter the state of waiting for voice remote control configuration after release. Before the red light goes off, say it into the voice remote

- Match curtain or remove window > Have learned, please proceed to the next command word setting
- Kitty, exit setting > Exited setting

4. Stroke restores factory Settings

Press and hold the double key until the indicator flashes from red to white, then release and delete the travel setting

5. Restore all states to factory Settings

Press and hold the double key until the indicator flashes red, then white, then blue, then release
 Set/pair/delete/delete the green light flashes twice after the pairing is successful.
 1A Charging time is about 2.5 hours full. Green light when charging; Full of green lights out; If you can't fill it, the green light flashes.



Command	
Kitty, open the window	
Kitty, close the window	
Kitty, stop the window	
Paired word	
1 Kitty, remote control setting	
2 Kitty, repeat command	
3 Kitty, learn again	
4 Kitty, exit setting	
5 Kitty, my version	
6 Kitty, louder	
7 Kitty, lower your voice	



Smartbears Product



VOICE Smartbears Smart Curtain opening and Closing machine - lightweight



Internal slot rod



I-rod



Roman rod



Curtain opening and closing machine



The AI can hear you

Control Box



ePaton Surveillance & Control Centers

Voice remote control - Plug type



Specification:

With the ePaton Surveillance & Control Centers can be remotely controlled or scheduled to open and close the curtain, can be used with the scenario setting, and can set the scenario setting mode of use on the App. With the wall type/plug type and handheld type voice control (open space) or touch buttons on the curtain control box, control the forward/reverse and on/off of the motor to realize the opening and closing of the curtain.

- Protection class: IP40
- Curtain opening and closing: unilateral walking type, left and right bilateral type
- Applicable track: internal slot rod, I-rod, Roman rod type is optional

WS-552 Curtain opening and closing machine

- Motor size: 114 x 57 x 62 mm Motor weight: 125g
- Voltage rating: 7.4V DC Rated current: 0.64A
- Locked-rotor Current: 4A Rated speed: 33rpm
- Adjustable travel (factory default travel 60s)

WS-472-2 Control Box

- Input: 12V 1.25A Max
- Output: 7.4V 1A Max
- Battery capacity: 1500 mAh
- WS-DC-505-N Control line
- Cable length: ○ 1M ○ 1.5M
- Plug: locked type

Smartbears Voice Command list

Shir, curtain open
Shir, curtain close
Shir, curtain stop

Curtain opening and closing control

1. APP remote control
2. Schedule time on & off
3. Voice control
4. Scenario setting
5. Touch control

1. Smartbears APP

Open the APP to scan the QR code of the control box to add the smart curtain opening and closing machine, and add the voice remote control in the same way, as shown on the right.

Control box instructions:

2. Manual use

Click the button outward key (→) to open the window. Click the button inward key (←) to open the window. Press any key to stop in motor motion

3. Stroke setting

Press the single key for 5 seconds until the green light flashes quickly, the motor starts to turn after the finger is released, and the motor stops after pressing any key at the appropriate position. At this time, the distance to walk is the set stroke

4. Stroke restores factory Settings


Press and hold the double key until the indicator flashes from red to white, then release and delete the travel setting

5. Restore all states to factory Settings


Press and hold the double key until the indicator flashes red, then white, then blue, then release Set/pair/delete/delete the green light flashes twice after the pairing is successful.

1A Charging time is about 2.5 hours full. Green light when charging; Full of green lights out; if you can't fill it, the green light flashes.

Manual

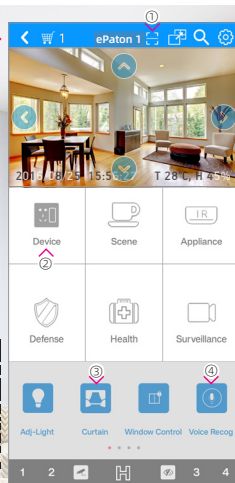

Curtain open and close control and timing setting

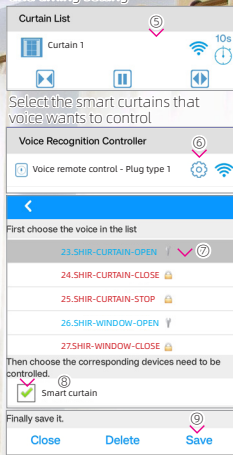

Whole house switch socket configuration




Touch Control
Wall Switch 3 Control



2 Ports 2-Pin+3-Pin
Socket USB Charger



2 Ports 2-Pin+3 Pin
Socket

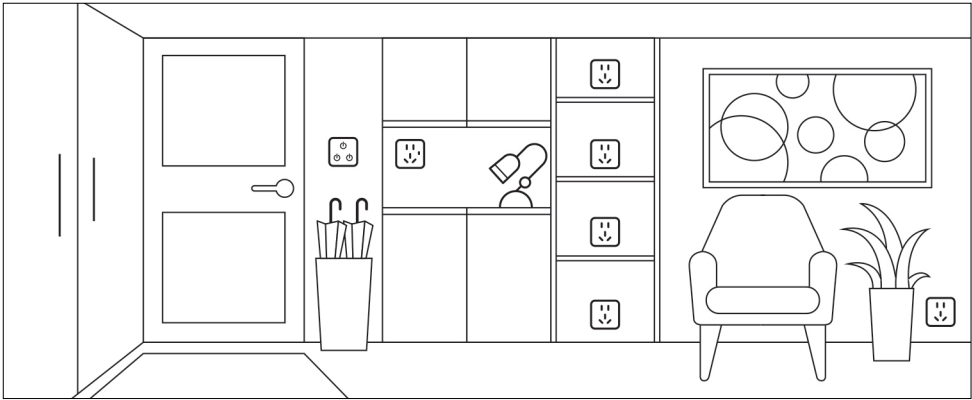


Touch Control
Wall Switch 1 Control



16A 3-Pin Socket



2 Ports 2-Pin+3-Pin
Socket Switch 1 Contro

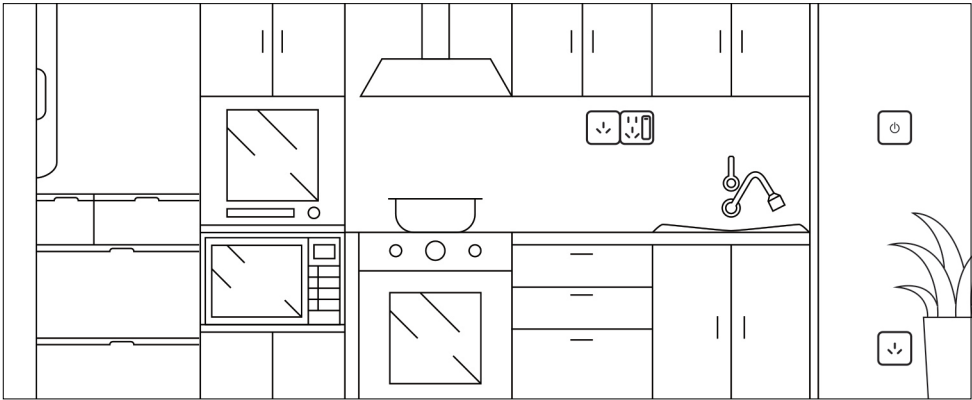

Whole house switch socket configuration

Dining room



Touch Control
Wall Switch 1 Control




16A 3-Pin Socket



2 Ports 2-Pin+3-Pin
Socket Switch 1 Control



Bedroom

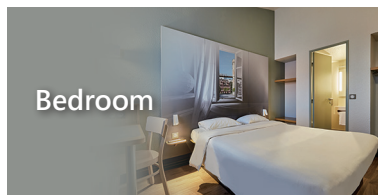

Touch Control
Wall Switch 1 Control




16A 3-Pin Socket
Switch 1 Control



2 Ports 2-Pin+3-Pin
Socket USB Charger



2 Ports 2-Pin+3-Pin
Socket Type-C Charger

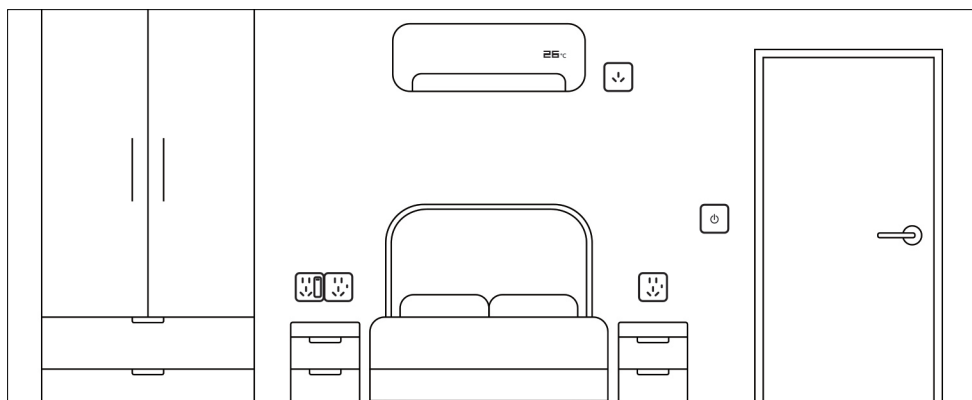

Whole house switch socket configuration





Touch Control
Wall Switch 1 Control



16A 3-Pin Socket



2 Ports 2-Pin+3 Pin
Socket

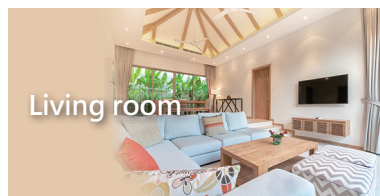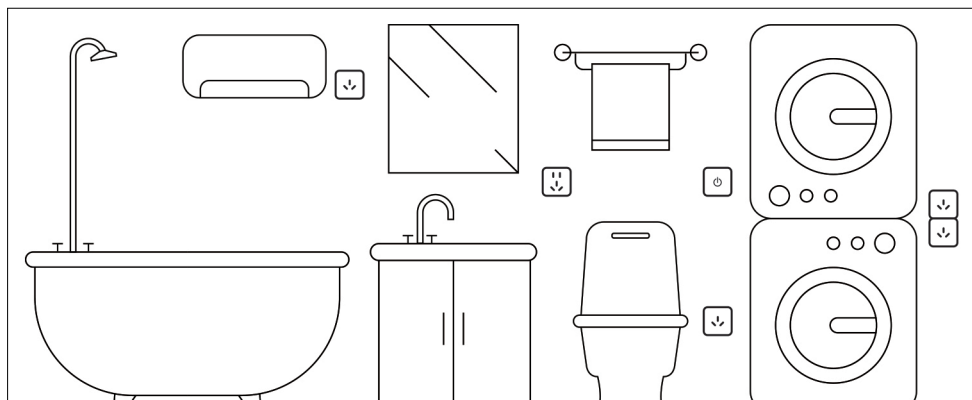

Touch Control Wall
Switch 3 Control



16A 3-Pin Socket
Switch 1 Control




2 Ports 2-Pin+3-Pin
Socket
USB Charger




2 Ports 2-Pin+3-Pin
Socket
Type-C Charger




TV

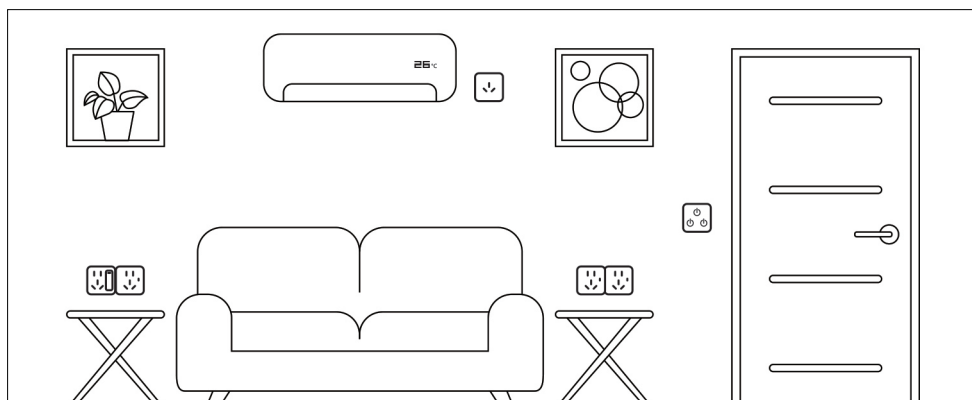


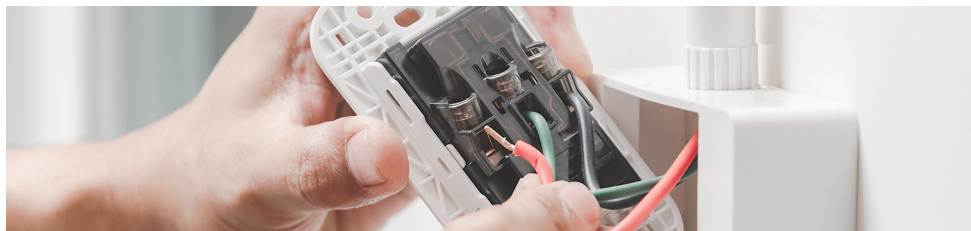


Smart home decoration of the basic environment

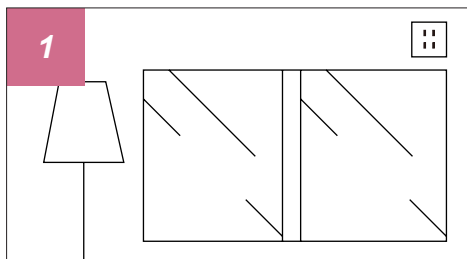


At least one prefabricated power supply box should be reserved above the frame of any window

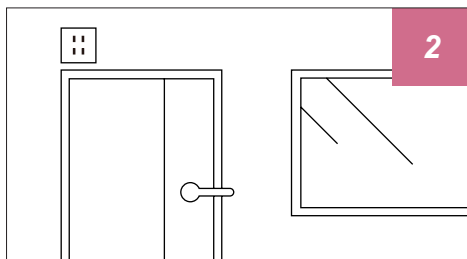


A power socket box shall be reserved along the upper outer corner of any door frame to facilitate the AC power supply in place.

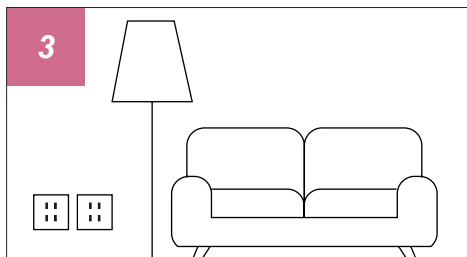


There should be at least two power presets anywhere in the room.

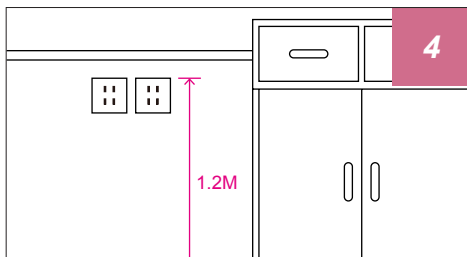


The preset box of indoor and outdoor power socket switch shall be installed on the wall at a height of not less than 1.2 meters above the ground

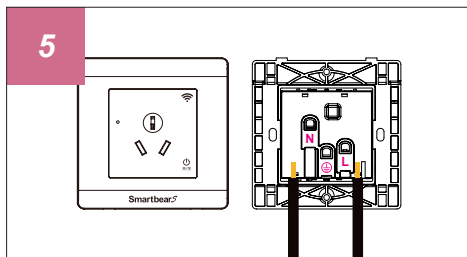


Indoor power socket switch box should use N,L two wire in place.

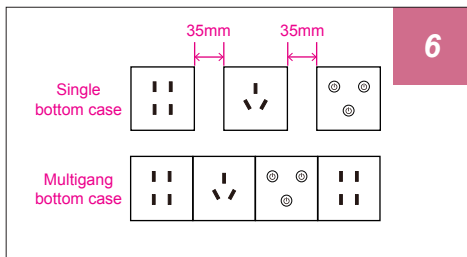


Power socket switch box should be flat and straight with the wall, and the distance should be consistent and the construction standard.

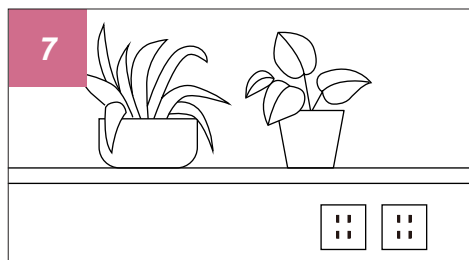


The balcony is used for planting box scenery or drying clothes to reserve power socket box for water valve, hanger power supply.

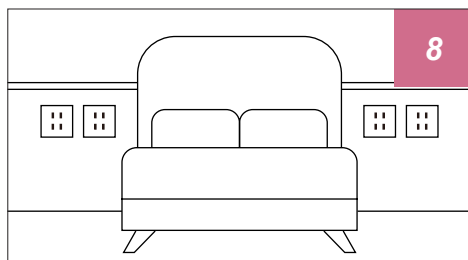


The wall switch socket box at the head of the bed should be at least four to five, the position and height must avoid the position of the headboard.

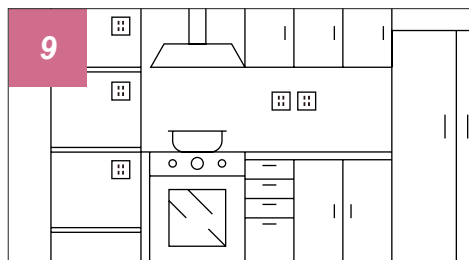


Kitchen, table of switch socket, the number and height should be considered and electrical equipment after positioning.

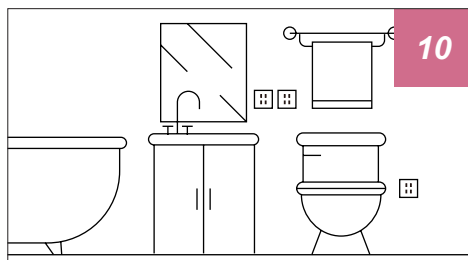


It is recommended to leave power boxes in the toilets of bathrooms and restrooms.

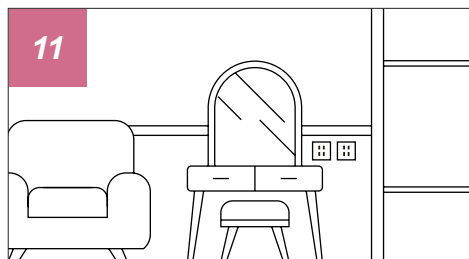


A power socket box is recommended for the location of the hostess's dresser.

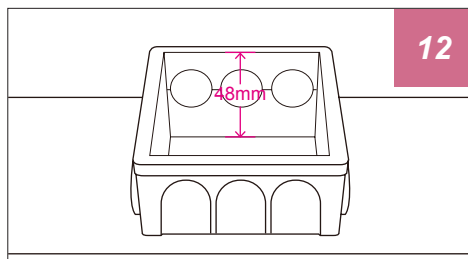

Power supply preset box must be selected deep - bottom type.

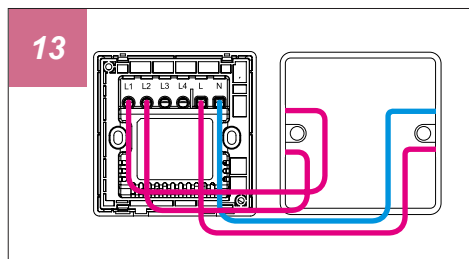

Each lamp switch box can only reserve two circuit wires at most, so as not to push too many wires and affect the assembly lock.

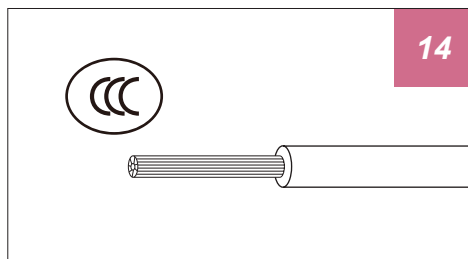

Wire must be used with UL certification products, copper conductor as far as possible to choose multi-root wire, bending performance is better.

Innitiative

Close Cooperation

Interaction

Link and Move

**Professional
Smart Home
Solution**



Well Shin Technology Co., Ltd.

Addr : No.196, Xinhu 3rd Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

WEB : www.wellshin.com.tw TEL : +886-2-27911119 Service Hotline : +886-910-232-715

Brand Owner : Dongguan Plugo Electric Co., Ltd.

Manufacturer : Dongguan Well Shin Electronic Products Co., Ltd.

Addr : Chang Long Control Dist., Hwang Jiang Cheng, Dongguan, Guandong, 523766 China

TEL : +86-0769-83622694 Service Hotline : +8613826995493