























PLUG

MOLDED










MOLDED PLUGS

A . IEC 309 Plugs.....	1.1	
IP 20 Splashproof Devices.....	1.1	
IP 44 Splashproof Devices.....	1.1	
B . Taiwan, Japan Plugs.....	1.5	
2 pin 2 wire Straight Plugs.....	1.5	
2 pin 2 wire Easy-Pull Smart Plugs.....	1.7	
2 pin 2 wire Angle Plugs.....	1.9	
2 pin 2 wire T Shape Plugs.....	1.11	
15A 125V, 2 pin 3 wire grounding Straight Plugs.....	1.13	
15A 125V, 2 pin 3 wire grounding Elbow Plugs.....	1.15	
20A 125V, 2 pin 3 wire grounding.....	1.17	
15A 250V, 2 pin 3 wire grounding.....	1.17	
20A 250V, 2 pin 3 wire grounding.....	1.17	
Twist Locking Plugs.....	1.17	
2 pin 3 wire grounding T Shape Plugs.....	1.19	
C . China Plugs.....	1.21	
2 Pin Plugs, 6A, 10A 250V.....	1.21	
3 Pin Plugs, 6A, 10A, 250V.....	1.21	
3 Pin Plugs, 16A 250V.....	1.23	
4 Pin 3 phases plugs, 16A, 25A, 32A 440V.....	1.23	
D . Australia Plugs.....	1.25	
E . Argentina Plugs.....	1.27	
F . Korea Plugs.....	1.28	
G . Europe, Russia Plugs.....	1.29	
2 Pin Plugs.....	1.29	
3 Pin Plugs.....	1.31	
5 Pin Plugs.....	1.31	
3 pin Electric Cooker Plug.....	1.31	
T Shape Plugs.....	1.33	
H . Denmark Plugs.....	1.35	
I . Greece Plugs.....	1.37	
J . Israel Plugs.....	1.38	
K . South Africa Plugs.....	1.39	
2 Pin Plugs.....	1.39	
R . India Plugs.....	1.41	
L . Italy Plugs.....	1.43	
M . Switzerland Plugs.....	1.45	
N . UK Plugs.....	1.47	
O . Singapore Plugs.....	1.49	
P . Hongkong Plugs.....	1.50	
N . Saudi Arabia Plugs.....	1.51	
Q . Malaysia Plugs.....	1.52	
S . Brazil Plugs.....	1.53	





T . Mexico Plugs.....	1.54	
U . USA and Canada Plugs.....	1.55	
NEMA 1-15P Straight Plugs.....	1.55	
NEMA 1-15P Elbow Plugs.....	1.59	
NEMA 1-15P/R T Shape Plugs.....	1.61	
NEMA 5-15P Straight Plugs.....	1.63	
NEMA 5-15P Elbow Plugs.....	1.67	
NEMA 5-15P/R T Shape Plugs.....	1.71	
NEMA 5-20P.....	1.73	
NEMA 6-15P.....	1.75	
NEMA 6-20P.....	1.77	
Hospital Grade Plug.....	1.79	
Twist Locking Plugs, 2 Pole 3 Wire Grounding.....	1.81	
Twist Locking Plugs, 3 Pole 4 Wire Grounding.....	1.83	
Twist Locking Plugs, 4 Pole 5 Wire Grounding.....	1.83	
V. Range, Dryer and Welding Machine Major appliance Plug.....	1.85	
15AMP, 2 Pole, 3 Wire Grounding.....	1.85	
20AMP, 2 Pole, 3 Wire Grounding.....	1.85	
20AMP, 3 Pole, 4 Wire Grounding.....	1.85	
30AMP, 3 Pole, 3 Wire Non-Grounding, Elbow Plug.....	1.87	
50AMP, 3 Pole, 3 Wire Non-Grounding, Elbow Plug.....	1.87	
30AMP, 2 Pole, 3 Wire Grounding, Elbow Plug.....	1.87	
50AMP, 2 Pole, 3 Wire Grounding, Elbow Plug.....	1.87	
30AMP, 3 Pole, 4 Wire Grounding.....	1.89	
50AMP, 3 Pole, 4 Wire Grounding.....	1.89	
W . RV AC Plug.....	1.91	
NEMA TT-30P, 2 Pole, 3 Wire Grounding.....	1.91	
NEMA 14-50P, 3 Pole, 4 Wire Grounding.....	1.91	
X . Marine shore Plugs.....	1.93	
15 AMP, 2 Pole 3 Wire Grounding.....	1.93	
20 AMP, 2 Pole 3 Wire Grounding.....	1.93	
30 AMP, 2 Pole 3 Wire Grounding.....	1.93	
20 AMP, 3 Pole 4 Wire Grounding.....	1.93	
30 AMP, 3 Pole 4 Wire Grounding.....	1.93	
20 AMP, 4 Pole 5 Wire Grounding.....	1.95	
50 AMP, 2 Pole 3 Wire Grounding.....	1.95	
50 AMP, 3 Pole 4 Wire Grounding.....	1.95	
International Plug Type List.....	1.97	
NEMA Straight Blade Configurations.....	1.99	
NEMA Locking Configurations.....	1.100	
International-Rated IEC 309 Devices, Pin and Sleeve Devices.....	1.101	

Copyright © 2009 by Well Shin Technology Co., Ltd. All rights reserved. None of the information provided here may be used, duplicated, reproduced, either partially or completely, without prior permission of Well Shin. 本公司之目錄享有法律著作權，未經授權不得摘編、拷貝、使用。

Information provided here may consist of uncertainty, Well Shin reserves the right to revise or explain all the time. 目錄中資料可能因疏失而存在錯誤，本公司保留隨時修正或解釋的權利。







A . IEC 309 Plugs

IP 20 Splashproof Devices


2P 3W




WS-196-P2
2P3W-32A-6H
200-250V~



WS-196-1-P2
2P3W-32A-4H
100-130V~




WS-197-P2
2P3W-16A-4H
100-130V~




WS-197-1-P2
2P3W-16A-6H
200-250V~

IP 44 Splashproof Devices


2P 3W




WS-196
2P3W-32A-6H
200-250V~



WS-196-1
2P3W-32A-4H
100-130V~



WS-197
2P3W-16A-4H
100-130V~



















WS-197-1
2P3W-16A-6H
200-250V~



Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-196-P2	H05RR-F 3G 2.5~4.0MMSQ H05VV-F 3G 2.5~4.0MMSQ	32A 200-250V	
WS-196-1-P2	H05RR-F 3G 2.5~4.0MMSQ H05VV-F 3G 2.5~4.0MMSQ	32A 100-130V	
WS-197-P2	H05RR-F 3G 1.0~2.5MMSQ H05VV-F 3G 1.0~2.5MMSQ	16A 100-130V	
WS-197-1-P2	H05RR-F 3G 1.0~2.5MMSQ H05VV-F 3G 1.0~2.5MMSQ	16A 200-250V	
WS-196	H07RN-F 3G 1.0-6.0 H07BB-F 3G 6.0	32A 200-250V	
	(SJT,SJTO,SJTOW,SJTW,SJ,SJO,SJOW,ST,STO) 10AWG*3C	30A 250V	 c 
WS-196-1	H07RN-F 3G 2.5-4.0MMSQ	32A 100-130V	
	(SJT,SJTO,SJTOW,SJTW,SJ,SJO,SJOW,ST,STO) 10AWG*3C	30A 125V	 c 
WS-197	H07RN-F 3G 1.0-2.5MMSQ	16A 100-130V	
	(SJT,SJTO,SJTOW,SJTW,SJ,SJO,SJOW,ST,STO) 14AWG*3C (SJT,SJTO,SJTOW,SJTW,SJ,SJO,SJOW,ST,STO) 12AWG*3C	16A/20A 125V	 c 
WS-197-1	H07RN-F 3G 1.0-2.5MMSQ	16A 200-250V	
	(SJT,SJTO,SJTOW,SJTW,SJ,SJO,SJOW,ST,STO) 14AWG*3C (SJT,SJTO,SJTOW,SJTW,SJ,SJO,SJOW,ST,STO) 12AWG*3C	16A/20A 250V	 c 

* Under Application for Approval





Molded Plugs


WS-196
2P3W-32A-6H
200-250V~

WS-196-1
2P3W-32A-4H
100-130V~


WS-197
2P3W-16A-4H
100-130V~

WS-197-1
2P3W-16A-6H
200-250V~

3P 4W



WS-309-4P-32A-3H-P



WS-309-4P-32A-6H-P



WS-309-4P-32A-3H-P
380V to 440V



WS-309-4P-32A-6H-P
380V to 415V



WS-309-4P-32A-11H-P
440V to 460V



WS-309-4P-32A-4H-P
100V to 130V



WS-309-4P-32A-7H-P
480V to 500V




WS-309-4P-32A-5H-P
600V to 690V



WS-309-4P-32A-9H-P
200V to 250V

4P 5W



WS-309-5P-32A-6H-P



WS-309-5P-32A-3H-P
220/380V to 250/440V



WS-309-5P-32A-6H-P
200/346V to 240/415V



WS-309-5P-32A-11H-P
250/440V to 265/460V



WS-309-5P-32A-4H-P
57/100V to 75/130V



WS-309-5P-32A-7H-P
277/480V to 288/500V



WS-309-5P-32A-5H-P
347/600V to 400/690V



WS-309-5P-32A-9H-P
120/208V to 144/250V



Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-309-4P-32A-3H-P	H07RN-F 2.5~6.0MMSQ*4G; SJT,SJTO,SJTOW,SJTW,SJ,SJO,SJOW,ST,STO 14AWG~10AWG*4G	32A 380V to 440V	★
WS-309-4P-32A-4H-P	H07RN-F 2.5~6.0MMSQ*4G; SJT,SJTO,SJTOW,SJTW,SJ,SJO,SJOW,ST,STO 14AWG~10AWG*4G	32A 100V to 130V	★
WS-309-4P-32A-5H-P	H07RN-F 2.5~6.0MMSQ*4G; SJT,SJTO,SJTOW,SJTW,SJ,SJO,SJOW,ST,STO 14AWG~10AWG*4G	32A 600V to 690V	★
WS-309-4P-32A-6H-P	H07RN-F 2.5~6.0MMSQ*4G; SJT,SJTO,SJTOW,SJTW,SJ,SJO,SJOW,ST,STO 14AWG~10AWG*4G	32A 380V to 415V	★
WS-309-4P-32A-7H-P	H07RN-F 2.5~6.0MMSQ*4G; SJT,SJTO,SJTOW,SJTW,SJ,SJO,SJOW,ST,STO 14AWG~10AWG*4G	32A 480V to 500V	★
WS-309-4P-32A-9H-P	H07RN-F 2.5~6.0MMSQ*4G; SJT,SJTO,SJTOW,SJTW,SJ,SJO,SJOW,ST,STO 14AWG~10AWG*4G	32A 200V to 250V	★
WS-309-4P-32A-11H-P	H07RN-F 2.5~6.0MMSQ*4G; SJT,SJTO,SJTOW,SJTW,SJ,SJO,SJOW,ST,STO 14AWG~10AWG*4G	32A 440V to 460V	★
WS-309-5P-32A-3H-P	H07RN-F 4.0MMSQ*5G	32A 220/380V to 250/440V	★
WS-309-5P-32A-4H-P	H07RN-F 4.0MMSQ*5G	32A 57/100V to 75/130V	★
WS-309-5P-32A-5H-P	H07RN-F 4.0MMSQ*5G	32A 347/600V to 400/690V	★
WS-309-5P-32A-6H-P	H07RN-F 5*4.0...6.0mm2(IP44) H05VV-F 5*4.0mm2(IP20)	32A 200/346-240/415V	
WS-309-5P-32A-7H-P	H07RN-F 4.0MMSQ*5G	32A 277/480V to 288/500V	★
WS-309-5P-32A-9H-P	H07RN-F 4.0MMSQ*5G	32A 120/208V to 144/250V	★
WS-309-5P-32A-11H-P	H07RN-F 4.0MMSQ*5G	32A 250/440 to 265/460	★

* Under Application for Approval







Molded Plugs

B . Taiwan, Japan Plugs


2 pin 2 wire Straight Plugs




WS-004C-1
with cable grip




WS-005B
(with Grounding Wire)




WS-005B-1
(with Grounding Wire)




WS-005B-2
(with bakelite inner body)




WS-004B-2

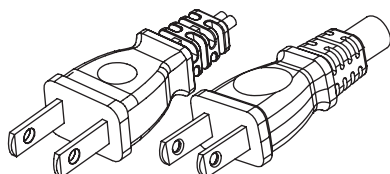


WS-005C




WS-005C (Pin with Insulation)




WS-005C (polarity)




WS-005C-1




WS-005C-2




WS-005C-3



WS-005C-4




WS-005C-5




WS-005C-6


Customer exclusive



WS-005C-7 (with hook)




WS-005C-8




WS-005C-9

Customer exclusive




WS-005C-10

Customer exclusive




WS-005C-11




WS-005C-12

Customer exclusive




WS-005C-13

Customer exclusive




WS-005C-14

Customer exclusive




WS-005D (with bakelite inner body)


1.5



WS-005F (Pin with Insulation)



WS-005-H



WS-005S

Customer exclusive

www.wellshin.com.tw






Molded Plugs


Information

Model No.	Applicable Cable	Rating	Approval
WS-004C-1	VCTF 0.75~2.0MMSQ*2C HVCTF 0.75~2.0MMSQ*2C	7A 125V	
WS-005B WS-005B-1 WS-005B-2	VFF 0.75/1.0/1.25/2.0MMSQ* 2C HVFF 0.75/1.0/1.25/2.0MMSQ* 2C VCTF 0.75/1.0/1.25/2.0MMSQ* 2C	7~15A 125V	
WS-005C WS-005C-1 WS-005C-2 WS-005C-3 WS-005C-4 WS-005C-5 WS-005C-6 WS-005C-7	VFF 0.75/1.0/1.25/2.0MMSQ* 2C HVFF 0.75/1.0/1.25/2.0MMSQ* 2C VCTF 0.75/1.0/1.25/2.0MMSQ* 2C	7A,9A, 11A, 15A 125V 12A 125V	
WS-005D	VFF 0.75~2.0 MMSQ VCTF 0.75~2.0MMM HVFF 0.75~2.0MMSQ VCTFK 0.75~2.0MMSQ HHFF 0.75~2.0MMSQ	2.5A, 7A,9A, 11A, 15A 125V	
WS-005E WS-004S	VFF 0.75~2.0 MMSQ VCTF 0.75~2.0MMM HVFF 0.75~2.0 MMSQ VCTFK 0.75~2.0MMSQ	7~15A 125V	*
WS-005F	VFF 0.75~2.0 MMSQ HVFF 0.75~2.0 MMSQ VCTFK 0.75~2.0MMSQ	7A~15A 125V	*
WS-005H	VFF 0.75~1.25MMSQ VCTF 0.75MMM HVFF 0.75~1.25 MMSQ VCTFK 0.75~1.25MMSQ	7A~12A 125V	*
WS-005I	VCTF 0.75~2.0MMM VCT 0.75~2.0MMSQ HVCTF 0.75~2.0MMSQ	7~15A 125V	


* Under Application for Approval



WS-004-11
Twist and Lock Secure System



WS-005-I Waterproof

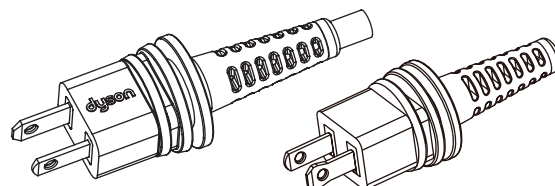

WS-004-3

Customer exclusive


1.6






Molded Plugs


2 pin 2 wire Easy-Pull Smart Plugs




WS-004-L
Easy Pull Smart Plug
PATENTED




WS-004C-2 With Cable Grip
Easy Pull Smart Plug
PATENTED




WS-005-M
Easy Pull Smart Plug
PATENTED




WS-004-W
Easy Pull Smart Plug
Ultrasonic Welding Assembly




WS-005-L
Easy Pull Smart Plug
PATENTED



WS-005-L
Easy Pull Smart Plug
Customer exclusive



WS-004-N
Easy Pull Smart Plug
PATENTED





WS-005-0
With Easy Pull
PATENTED

Easy-Pull Smart Plug



1st Step: Press

2nd Step: Spring Out

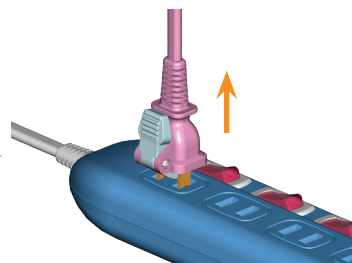



Molded Plugs

Model No.	Applicable Cable	Rating	Approval
WS-004-L Easy Pull Smart Plug	VCTFK 0.75~2.0MMSQ*2C	3~7A 125V	
WS-004C-2 With Cable Grip Easy Pull Smart Plug	VCTF 0.75~2.0MMMQ VCT 0.75~2.0MMSQ HVCTF 0.75~2.0MMSQ	7~15A 125V	*
WS-005-L Easy Pull Smart Plug	VCTFK 0.75~2.0MMSQ*2C	3~7A 125V	
WS-005-M WS-004-N WS-005-O	VCTFK 0.75~2.0MMSQ*2C	7~15A 125V	*


* Under Application for Approval






Molded Plugs


2 pin 2 wire Angle Plugs




WS-004-P




WS-005A1




WS-005A2




WS-005A
(with bakelite inner body)




WS-005A-3
Customer exclusive




WS-005A-4
Customer exclusive




WS-005A-7
Customer exclusive




WS-004-S
8-Position angle plug




WS-005E




WS-004-Q
8-Position angle plug



Slim Plug



Space Saving




Protection against fire



Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-004-P	VCTF 0.75~2.0MMMQ* 3G HVCTF 0.75~2.0MMMQ *3G	7~15A 125V	*
WS-005A WS-005A1 WS-005A2	VFF 0.75/1.25/2.0MMSQ*2C HVFF 0.75/1.0/1.25/2.0MMSQ*2C VCTF 0.75/1.25/2.0MMSQ*2C	2.5A, 7A, 9A, 11A, 15A 125V	
WS-004-Q 8-Position angle plug	VCTF 0.75~2.0MMMQ* 3G HVCTF 0.75~2.0MMMQ *3G	7~15A 125V	*

* Under Application for Approval







Molded Plugs

2 pin 2 wire T Shape Plugs


2 Pin Plugs, 7~15A 125V




WS-021




WS-021-1
dapper




WS-021-2
(with hole)




WS-021-3



WS-021-4



WS-021A-1~8
8-Position angle plug



* WS-021B-1~8
Ultrasonic welding, With Ear
8-Position angle plug

※ 8 Position angle plug is available.



Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-021	VCTF 0.75~1.25*2C HVCTF 0.75*2C VCTFK 0.75*2C	10A 125V	*
WS-021-1	VCTF 0.75~1.25*2C HVCTF 0.75*2C VCTFK 0.75*2C	10A 125V	*
WS-021-2	VCTF 0.75~1.25*2C HVCTF 0.75*2C VCTFK 0.75*2C	10A 125V	*
WS-021-3	VCTF 0.75~1.25*2C HVCTF 0.75*2C VCTFK 0.75*2C	10A 125V	*
WS-021-4	VCTF 0.75~1.25*2C HVCTF 0.75*2C VCTFK 0.75*2C	10A 125V	*
WS-021A-1~8 WS-021B-1~8	VCTF 0.75~1.25*2C HVCTF 0.75*2C VCTFK 0.75*2C	10A 125V	*

* Under Application for Approval






Molded Plugs




15A 125V, 2 pin 3 wire grounding Straight Plugs


7~15A 125V




WS-001




WS-001
Inner body




WS-001A
1 to 2 Cables




WS-001A-3
with Fuse




WS-001A-4
Urea Housing




WS-001A-5
With Breather Tube




WS-001A-6



WS-001F-2
Inner body




WS-001F-2




WS-001-17
Ultrasonic welding assembly




WS-001A-7




WS-001G-2
With Cable Grip




WS-001G-2A
With Cable Grip




WS-001G-3
With Cable Grip




WS-001E-1
with EMI Shielding




WS-001G
With Cable Grip




WS-001G-4
With Cable Grip and Neon light




WS-001Z
Easy Pull Smart Plug
PATENTED




WS-001Y-1
waterproof




WS-001-2
waterproof, material: TPE




WS-001A-11




WS-001Z-3
Easy Pull Smart Plug
Ultrasonic Welding Assembly



WS-001-14
Earth pin rotatable
3 pin transform 2pin



Customer exclusive



WS-001-16
Twist and Lock Secure System

1.13






Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-001	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7, 11, 15A 125V	
WS-001A	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7~15A 125V	*
WS-001A-3	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7~15A 125V	*
WS-001A-4	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7~15A 125V	*
WS-001A-5	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7~15A 125V	*
WS-001A-6	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7~15A 125V	*
WS-001F-2	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7A, 11A, 15A 125V	
WS-001E-1	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7~15A 125V	*
WS-001G WS-001G-4	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7~15A 125V	*
WS-001A-7	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7~15A 125V	*
WS-001G-2 WS-001G-2A WS-001G-3	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7~15A 125V	*
WS-001Y-1 WS-001-2	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7~15A 125V	*
WS-001Z	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7A, 11A, 15A 125V	
WS-001-14 WS-001-17	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7~15A 125V	*

* Under Application for Approval

Easy-Pull Smart Plug

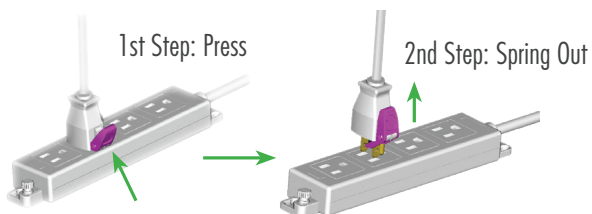

www.wellshin.com.tw

1.14







Molded Plugs




15A 125V, 2 pin 3 wire grounding Elbow Plugs




WS-001B




WS-001B-1~8
8-Position angle plug




WS-001B9-a~i
9-Position angle plug




WS-001B-17~24
8-Position angle plug




WS-001D-1~8
8-Position angle plug




WS-001B-25
1 to 2 Cables




WS-001C-1




WS-001D-5-1~8
8-Position angle plug




WS-001M-1
Ground "O"




WS-001M-1
Ground "U"




WS-001G-1
With Cable Grip




WS-001Z-1
Easy Pull Smart Plug
PATENTED




*WS-001B-16
(WITH EMI)
Ultrasonic welding




WS-001E-5
(WITH EMI)
Ultrasonic welding



WS-001B-28
Ultrasonic welding assembly




WS-001B-32
8-Position angle plug
Ultrasonic welding assembly




WS-001B9-a~i
9-Position angle plug


Slim Plug



Space Saving



Protection against fire



1.15

※ 8 & 9-Position angle plug is available.





Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-001B	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7, 11, 15A 125V	
WS-001B9-a~i WS-001B-31	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7A, 11A, 15A 125V	*
WS-001D-1-1~8 8-Position angle plug	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7A, 11A, 15A 125V	
WS-001B-25 1 to 2 Cables	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7A, 11A, 15A 125V	*
WS-001C-1	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	9A, 11A, 15A 125V	
WS-001M-1	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7A, 11A, 15A 125V	*
WS-001G-1 With Cable Grip	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7A, 11A, 15A 125V	*
WS-001Z-1	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7A, 11A, 15A 125V	*
WS-001D-5-1~8 8-Position angle plug	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7A, 11A, 15A 125V	
WS-001B-32	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7A, 11A, 15A 125V	*


* Under Application for Approval






Molded Plugs


20A 125V, 2 pin 3 wire grounding




WS-001C-3



WS-001M-3
Ground "O"




WS-001M-3
Ground "U"




WS-001I-2


15A 250V, 2 pin 3 wire grounding




WS-001I-1



WS-001C-2




WS-001M-2
Ground "O"




WS-001M-2
Ground "U"


20A 250V, 2 pin 3 wire grounding




WS-001C-4




WS-001M-4
Ground "O"



WS-001M-4
Ground "U"




WS-001I-3



WS-001V


Twist Locking Plugs

3 Pin twist locking Plug,
3~7A 125V




WS-214

2 Pole 3 Wire Grounding
15-20 Ampere, 250 Volt




WS-119 NEMA L6-20P

2 Pole, 3 Wire Grounding
30 Ampere, 125 Volt



WS-121 NEMA L5-30P

2 Pole, 3 Wire Grounding
30 Ampere, 250 Volt



WS-120 NEMA L6-30P



Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-001C-2	VCT, VCTF 1.25~2.0MMSQ*3C HVCTF 1.25~2.0MMSQ*3C	11A 15A 250V	
WS-001C-4 WS-001M-4 WS-001I-3	VCT 3.5MMSQ*3C VCT, VCTF, HVCTF 2.0MMSQ*3C	20A 250V	
WS-001I-1	VCT, VCTF 1.25 MMSQ*3C HVCTF 1.25 MMSQ*3C	7-15A 250V	
WS-001V	VCT 3.5MMSQ*3C VCT, VCTF, HVCTF 2.0MMSQ*3C	20A 250V	*
WS-214	VCT, VCTF, HVCTF 0.75MMSQ *3C	3~7A 125V	
WS-119	VCT, VCTF, HVCTF 2.0MMSQ *3C	15~20A 250V	
WS-121	VCT 3.5MMSQ*3C	20-30A 125V	
WS-120	VCT 3.5MMSQ*3C	20-30A 250V	

* Under Application for Approval







Molded Plugs

2 pin 3 wire grounding T Shape Plugs

3 Pin Plugs, straight
7~15A 125V




WS-022B




WS-022B-12 Easy-Pull Smart


PATENTED




WS-022B-9




WS-022B-10 with Breather Tube




WS-022B-1~8
8-Position angle plug



WS-022C-1~8 with hole
8-Position angle plug



*WS-022BD
Ultrasonic welding, Without Ear
8-Position angle plug



*WS-022E
Ultrasonic welding, With Ear
8-Position angle plug





Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-022B	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7A,11A,15A 125V	*
WS-022B-9	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7A,11A,15A 125V	*
WS-022B-12	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7A,11A,15A 125V	*
WS-022B-10	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7A,11A,15A 125V	*
WS-022B-1-8	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7A,11A,15A 125V	*
WS-022C-1~8	VCTF 0.75~2.0MMSQ*3C HVCTF 0.75~2.0MMSQ*3C	7A,11A,15A 125V	*

* Under Application for Approval







Molded Plugs

C . China Plugs


2 Pin Plugs, 6A,10A 250V

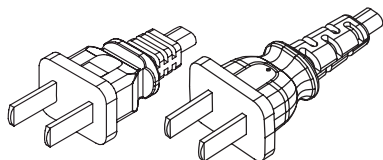


WS-004B




WS-004B-7
Ultrasonic welding assembly




WS-004B-3




WS-004B-9
Customer exclusive




WS-004B-8




WS-004B-6
Ultrasonic welding assembly




WS-004B-13
Customer exclusive




WS-004B-15
Customer exclusive




WS-004B-16
Customer exclusive



WS-004B-11
Twist and Lock Secure System



WS-004B-4
Customer exclusive






WS-004B-5



Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-004B	60227 IEC52 (RVV) 2*0.75MMSQ (flat) 60227 IEC53 (RVV) 2*0.75MMSQ (flat)	6A, 10A 250V	
WS-004B-3 WS-004B-4	60227 IEC 53 2*0.75, 1.0MMSQ	10A 250V	
WS-004B-6	60227 IEC 53 2X0.75mm2(round), 60227 IEC 53 2X 1.0mm2(round), 60227 IEC 52 2X0.75mm2(flat), 60227 IEC 53 2X0.75mm2(flat)	6A, 10A 250V	


* Under Application for Approval






Molded Plugs


3 Pin Plugs, 6A, 10A, 250V




WS-015D




WS-015D-4
Easy-Pull Smart Plug
PATENTED




WS-015D-6
Miniature




WS-015D-35
Customer exclusive




WS-015D-30
Twist and Lock Secure System




WS-015D-2




WS-015D-14
Ultrasonic welding assembly




WS-015D-2A
1 to 2 Cables




WS-015D-31
Customer exclusive




WS-015D-32
Customer exclusive




WS-015D-23




WS-015D-2B
Customer exclusive
PATENTED




WS-015D-20
Customer exclusive




WS-015D-8
Surge Protector and Power Indicator,
Ultrasonic welding assembly




WS-015D-9
溫控
Temperature Control Delay




WS-015D-10
時控
Time Control Delay




WS-015D-11
光亮控制
Light Control Delay




WS-015D-11A
光暗控制
Light and Dark Control Delay



WS-015D-12
聲控
Sound Control Delay



WS-015D-13
觸控
Touch Control Delay



WS-015D-21
藍牙 + 觸控
Blue Tooth Remote + Touch
Control Delay



Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-015D	60227 IEC53(RVV) 3*0.75(round) 60245 IEC53(YZ) 3*0.75(round)	6A 250V	
	60227 IEC53(RVV) 3*0.75,1.0 (round) 60245 IEC53(YZ) 3*0.75,1.0 (round)	10A 250V	
	60227 IEC53(RVV) 3*0.75,1.0,1.5 (round) 60245 IEC53(YZ) 3*0.75,1.0,1.5 (round)	16A 250V	
WS-015D-6	60227 IEC 53 3*0.75MMSQ	6A 250V	
	60227 IEC 53 3*0.75/1.0MMSQ	10A 250V	
WS-015D-2	60227IEC53 3*0.75,1.0MMSQ 60245IEC53 3*0.75,1.0MMSQ	6A,10A 250V	
WS-015D-2A	60227IEC53 3*0.75,1.0MMSQ 60245IEC53 3*0.75,1.0MMSQ	6A,10A 250V	*


* Under Application for Approval






Molded Plugs


3 Pin Plugs, 16A 250V




WS-015D-1




WS-015D-5
Easy Pull Smart-Plug with fuse
PATENTED




WS-015D-3



WS-015D-3A
1 to 2 Cables




WS-015D-7




WS-015D-31 (16A)
Customer exclusive


4 Pin 3 phases plugs, 16A, 25A, 32A 440V




WS-320
16A



WS-321
25A




WS-322
32A



Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-015D-3	60227IEC53 3*0.75,1.0,1.5MMSQ	16A 250V	
WS-015D-3A	RVV 300/500V 1.5MMSQ*3C*2 RVV 300/500V 1.5MMSQ*3C+1.0MMSQ*3C	16A 250V	*
WS-015D-14	60227IEC53 3*0.75,1.0MMSQ 60245IEC53 3*0.75,1.0MMSQ	10A 250V	*
WS-320	60227IEC53 3*0.75,1.0MMSQ 60245IEC53 3*0.75,1.0MMSQ	16A 440V	*
WS-321	60227IEC53 4*1.0,1.5,2.5MMSQ 60245IEC53 4*1.0,1.5,2.5MMSQ	25A 440V	*
WS-322	60227IEC53 4*2.5,4.0MMSQ 60245IEC53 4*2.5,4.0MMSQ	32A 440V	*

* Under Application for Approval







Molded Plugs

D . Australia Plugs


2 Pin Protector Plugs, 7.5A, 10A 250V




WS-009 (Pin with Insulation)




WS-009-1
(With Fuse & Insulation Pin)




WS-009-5
Customer exclusive




WS-009-6
Customer exclusive




WS-009-2 (Pin with Insulation)
Ultrasonic Welding Assembly



WS-009-3
Customer exclusive



WS-009-4
Customer exclusive



WS-009B-1~8
8-Position angle plug



WS-009B-1



WS-009B-2



WS-009B-3




WS-009B-4




WS-009B-5



WS-009B-6




WS-009B-7




WS-009B-8

3 Pin Protector Plugs, 10A, 15A 250V


3 Pin Protector Plugs, 10A, 15A 250V




WS-015
10A (Pin with Insulation)



WS-015-3
10A (Pin with Insulation)




WS-015A
15A (Pin with Insulation)




WS-015-5
Customer exclusive




Molded Plugs




WS-015B
10A (Pin with Insulation)



WS-015B-1
15A (Pin with Insulation)

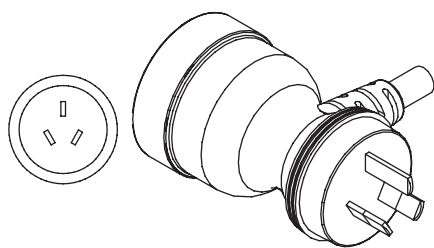

WS-211
10A T-type

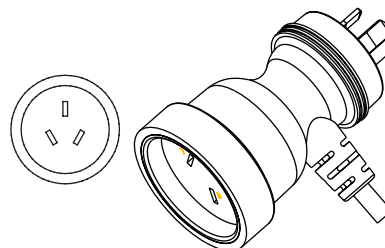

WS-211-1
15A T-type

Information

Model No.	Applicable Cable	Rating	Approval
WS-009	PVC 0.75-1.0*2C H05RR-F,H05RN-F 0.75,1.0*2	10A 250V	
WS-009B	PVC 0.75-1.0*2C H05RR-F,H05RN-F 0.75,1.0*2	10A 250V	*
WS-009-1 WS-009-2	NISPT-2 18AWG*2C	10A 250V	*
WS-015	PVC 0.75-1.0*3G H05RR-F,H05RN-F 0.75,1.0*3	10A 250V	
WS-015-A	PVC 1.5*3G H05RR-F 1.5*3	15A 250V	
WS-015B	H05VV-F 3*0.75,1.0 H05V2V-2F 3*0.75,1.0	10A 250V	
WS-015B-1	H05VV-F 3*0.75,1.0 H05V2V-2F 3*0.75,1.0	15A 250V	
WS-211	H05VV-F 3G 0.75~1.0MMSQ	10A 250V	
WS-211-1	H05VV-F 3G 1.5MMSQ	15A 250V	

* Under Application for Approval






Molded Plugs


E . Argentina Plugs

2 Pin Plugs, 10A 250V




WS-009F

3 Pin Plugs, 10A 250V







WS-015E



WS-015F

Information


Model No.	Applicable Cable	Rating	Approval
WS-009F	H05VV-F 2C 0.75~1.50MMSQ H03VV 2C 0.50~0.75MMSQ H03VVH2-F 2C 0.75MMSQ H03VVH2-F 2C 0.75MMSQ (Transparence)	10A 250V	 
WS-015E	H05VV-F 3G 0.75,1.0MMSQ H05RR-F 3G 0.75,1.0MMSQ H05RN-F 3G 0.75,1.0MMSQ H03VV-F 3G 0.75,1.0MMSQ H03RT-F 3G 0.75,1.0MMSQ	10A 250V	*
WS-015F	H05VV-F 3G 0.75~1.5MMSQ H03VV-F 3G 0.75MMSQ H05RR-F 3G 0.75~1.5MMSQ H05RN-F 3G 0.75~1.0MMSQ H05VV-F 3G 0.75MMSQ(Transparence)	10A 250V	 

* Under Application for Approval




F . Korea Plugs

2 Pin Straight Plugs




WS-006A (2.5A 250V)




WS-006A-1 (2.5A 250V)

Customer exclusive




WS-006A-3 (2.5A 250V)


Customer exclusive



WS-019-A (7A 250V)




WS-019-B (12A 250V)




WS-019-D (16A 250V)


3 Pin Plugs




WS-010F (7.5A 250V)




WS-010F-1 (16A 250V)




WS-010D (12A 250V)



WS-010E (15A 250V)



WS-010 (16A 250V)



WS-010A (16A 250V)

Information

Model No.	Applicable Cable	Rating	Approval
WS-006A	K60227 IEC52 H03VVH2-F 2*0.75 K60227 IEC53 H05VVH2-F 2*0.75	2.5A 250V	
WS-019-A	VCTF 2C 0.75MMSQ	7A 250V	*
WS-019-B	VCTF 2C 1.25MMSQ VCTFK 2C 1.25MMSQ	12A 250V	*
WS-019D	K60227 IEC57 H05V2V2-F 2*0.75/1.0/1.5MMSQ K60227 IEC57 H05V2V2H2-F 2*0.75/1.0MMSQ	16A 250V	
WS-010C	VCTF 3G 0.75MMSQ	7A 250V	*
WS-010F	H05VV-F 3G 0.75MMSQ	7.5A 250V	*
WS-010D	VCTF 3G 1.25MMSQ	12A 250V	*
WS-010E	VCTF 3G 2.0MMSQ	15A 250V	*
WS-010 WS-010A	K60227 IEC53 3*0.75,1.0,1.5 H05VV-F 3G 0.75,1.0,1.5MMSQ H05RR-F 3G 0.75,1.0,1.5MMSQ H05RN-F 3G 0.75,1.0MMSQ	16A 250V	






Molded Plugs

G . Europe, Russia Plugs


2 Pin Plugs

2 Pin Straight Plugs, 2.5A 250V




Lanky or flat cable


WS-006




Stronger or round cable




WS-006C
With EMI shielding




WS-006-4
Customer exclusive




WS-006-2
Ultrasonic welding assembly




WS-006-3
Ultrasonic welding assembly
With inductor




WS-006-1
Customer exclusive



WS-006-5
Customer exclusive




WS-006-6
Customer exclusive




WS-006-7
Customer exclusive

2 Pin Elbow Plugs 2.5A 250V




WS-006D


2 Pin Straight Plugs 16A 250V



WS-019

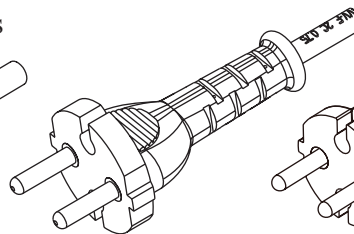


WS-019-1




WS-019-4

2 Pin Elbow Plugs 16A 250V




WS-019A

2 Pin Waterproof Plugs 16A 250V



WS-019B
(Waterproof)



WS-019B-1
(1 to 2 cable) Waterproof






Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-006	H03VV-F 2C 0.75MMSQ H05VV-F 2C 0.75MMSQ H03VVH2-F 2C 0.75MMSQ H05VVH2-F 2C 0.75MMSQ	2.5A 250V	
	H03VVH2-F 2C 0.75MMSQ H05VVH2-F 2C 0.75MMSQ	2.5A 250V	
WS-006-2	H03VVH2-F 2C 0.75MMSQ H05VVH2-F 2C 0.75MMSQ	2.5A 250V	
WS-006C	H03VVH2-F 2C 0.75MMSQ H05VVH2-F 2C 0.75MMSQ	2.5A 250V	*
WS-006D	H03VV-F 2*0.75 H05VV-F 2*0.75 H03VVH2-F 2C 0.75MMSQ H05VVH2-F 2C 0.75MMSQ	2.5A 250V	*
WS-019 WS-019A	H03VVH2-F 2*0.75MMSQ H05VVH2-F 2*0.75MMSQ H03VV-F 2*0.75MMSQ H05VV-F 2*0.75~1.5MMSQ H05RR-F 2*0.75~1.5MMSQ H05RN-F 2*0.75~1.0MMSQ H05RNH2-F 2*1.5MMSQ	16A 250V	EAC (DG)
WS-019	H05V2V2-F 2*0.75 H05V2V2-F 2*1.0 H05V2V2H2-F 2*1.0	16A 250V	(KS)
WS-019B	H05VV-F 2C 0.75, 1.0, 1.5MMSQ H05RR-F 2C 0.75, 1.0, 1.5MMSQ H05RN-F 2C 0.75, 1.0MMSQ H07RN-F 2C 1.0, 1.5MMSQ	16A 250V	EAC
WS-019B-1	H05VV-F 2C 0.75, 1.0, 1.5MMSQ H05RR-F 2C 0.75, 1.0, 1.5MMSQ H05RN-F 2C 0.75, 1.0MMSQ H07RN-F 2C 1.0, 1.5MMSQ	16A 250V	*
WS-010 WS-010A	H03VV-F 3*0.75 H05VV-F 3*0.75...1.5 H05RR-F 3*0.75...1.5 H05RN-F 3*0.75...1.0 H07RN-F 3*1.0, 1.5, 2.5 H03RT-H 3*0.75 H05BB-F 3*1.0, 1.5	16A 250V	EAC
WS-010B	H05VV-F 3G 0.75, 1.0, 1.5 MMSQ H05RR-F 3G 0.75, 1.0, 1.5 MMSQ H05RN-F 3G 0.75, 1.0 MMSQ H07RN-F 3G 1.0, 1.5 MMSQ	16A 250V	EAC







Molded Plugs

3 Pin Plugs

3 Pin Straight Plugs
10~16A 250V




WS-010A




WS-010A-1
Ultrasonic welding assembly


3 Pin Elbow Plugs
10~16A 250V



WS-010




WS-010(Small SR)




Customer exclusive
WS-010A-3

3 Pin Waterproof Plugs
10~16A 250V




WS-010B (Waterproof)

OEM Products
10A,16A 250V




WS-010C




with Cable Grip

5 Pin Plugs

5 Pin Plugs
16A 230/400V




WS-246



WS-246-1

3 pin Electric Cooker Plug

3 Pin
25A 250V



WS-438



Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-010C	H05RR-F 3G 0.75MMSQ H05RR-F 3G 1.0MMSQ H05RR-F 3G 1.5MMSQ H05RN-F 3G 0.75MMSQ H05RN-F 3G 1.0MMSQ H05VV-F 3G 0.75MMSQ H05VV-F 3G 1.0MMSQ H05VV-F 3G 1.5MMSQ H05V2V2-F 3G 0.75MMSQ H05V2V2-F 3G 1.0MMSQ H05V2V2-F 3G 1.5MMSQ	16A 250V	*
WS-246	H05VV-F 5G 0.75MMSQ	16A 230/400V	*

* Under Application for Approval







Molded Plugs

T Shape Plugs

2.5A/10 Ampere, 250 Volts



WS-206

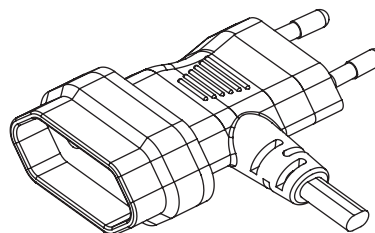


WS-206-1




Shutter Protection Design

10/16 Ampere, 250 Volts

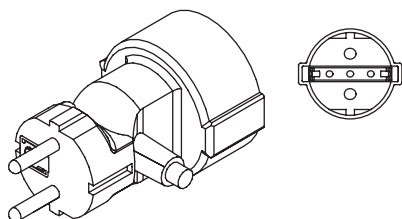

WS-169



WS-169-1
Ultrasonic welding



Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-206	H03VVH2-F 0.75MMSQ*2C H05VVH2-F 0.75MMSQ*2C	2.5A 10A 250V	*
WS-206-1	H03VVH2-F 0.75MMSQ*2C H05VVH2-F 0.75MMSQ*2C	2.5A 10A 250V	*
WS-169	H03VV-F 0.75MMSQ	10A 16A 250V	*

* Under Application for Approval



WS-206+WS-029



WS-206+WS-024-1



WS-206+WS-027-H



WS-206+WS-035-2






H . Denmark Plugs

3 Round Pin




3 Pin Straight Plugs,
10~16A 250V




WS-008A (Round Pin)

1 Round & 2 Flat Pin




WS-008A-1 (Round and Flat Pin)

2 Round & 1 Flat Pin




WS-008A-2 (Round and Flat Pin)


3 Pin Elbow Plugs,
10~16A 250V



WS-008B (Round Pin)




WS-008B-1 (Flat Pin)




WS-008B-2 (Round and Flat Pin)

OEM Products, 10A
250V

SMART PLUG




with Cable Grip




Customer exclusive

WS-008C (Round Pin)



Customer exclusive

WS-008C-1 (Round and Flat Pin)



Customer exclusive

WS-008C-2 (Round and Flat Pin)



Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-008A	H05VV-F 3G 0.75-1.0MMSQ H05RN-F 3G 0.75-1.0MMSQ H05RR-F 3G 0.75-1.0MMSQ	10A 250V	Ⓓ
WS-008A-1	H05VV-F 3G 0.75-1.0MMSQ H05RN-F 3G 0.75-1.0MMSQ H05RR-F 3G 0.75-1.0MMSQ	10A 250V	★
WS-008A-2	H05VV-F 3G 0.75-1.0MMSQ H05RN-F 3G 0.75-1.0MMSQ H05RR-F 3G 0.75-1.0MMSQ	10A 250V	★
WS-008B	H05VV-F 3G 0.75-1.0MMSQ H05RN-F 3G 0.75-1.0MMSQ H05RR-F 3G 0.75-1.0MMSQ	10A 250V	Ⓓ
WS-008B-1	H05VV-F 3G 0.75-1.0MMSQ H05RN-F 3G 0.75-1.0MMSQ H05RR-F 3G 0.75-1.0MMSQ	10A 250V	★
WS-008B-2	H05VV-F 3G 0.75-1.0MMSQ H05RN-F 3G 0.75-1.0MMSQ H05RR-F 3G 0.75-1.0MMSQ	10A 250V	★
WS-008C	H05VV-F 3G 0.75MMSQ H05VV-F 3G 1.00MMSQ	10A 250V	★
WS-008C-1	H05VV-F 3G 0.75MMSQ H05VV-F 3G 1.00MMSQ	10A 250V	★
WS-008C-2	H05VV-F 3G 0.75MMSQ H05VV-F 3G 1.00MMSQ	10A 250V	★

* Under Application for Approval






Molded Plugs

I . Greece Plugs

3 Pin Plugs, 7A 10A 250V

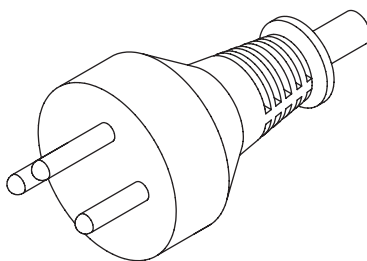

WS-017

Information


Model No.	Applicable Cable	Rating	Approval
WS-017	H03VV-F 3G 0.75MMSQ H05VV-F 3G 0.75, 1.0, 1.5MMSQ H05RR-F 3G 0.75, 1.0, 1.5MMSQ H05RN-F 3G 0.75, 1.0MMSQ	7A 10A 250V	*

* Under Application for Approval




J . Israel Plugs


3 Pin Plugs, 16A 250V



WS-020-1



WS-020-B
Ultrasonic Welding



WS-020-2

Molded Type Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-020-1	H05VV-F 3G 0.75, 1.0, 1.5MMSQ H05RR-F 3G 0.75, 1.0, 1.5MMSQ H05RN-F 3G 0.75, 1.0MMSQ	16A 250V	*
WS-020-2	H05VV-F 3G 0.75, 1.0, 1.5MMSQ H05RR-F 3G 0.75, 1.0, 1.5MMSQ H05RN-F 3G 0.75, 1.0MMSQ	16A 250V	*

* Under Application for Approval






K . South Africa Plugs

2 Pin Plugs

2 Pin Straight Plugs, 2.5A 250V

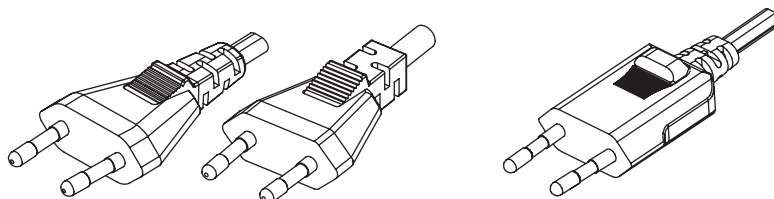


Lanky or flat cable


Stronger or round cable

WS-006C
With EMI shielding


WS-006



WS-006-2
Ultrasonic welding assembly




WS-006-3
Ultrasonic welding assembly
With inductor




WS-006-1
Customer exclusive


3 Pin Plugs, 5A
10A 250V



WS-018




WS-018-1




WS-018-2


3 Pin Plugs,
10A 16A 250V



WS-016



WS-016-1 (Plastic Grounding)





WS-018-B
10A, Ultrasonic welding



Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-016	H03VVH2-F 2C 0.5MMSQ H03VV-F 3G 0.75MMSQ H05VVH2-F 2C 0.75MMSQ H05VV-F 3G 1.0MMSQ H03VV-F 3G 1.5MMSQ H05VV-F 3G 0.75MMSQ	16A 250V	
WS-016-1	H03VVH2-F 2C 0.5MMSQ H03VV-F 3G 0.75MMSQ H05VVH2-F 2C 0.75MMSQ H05VV-F 3G 1.0MMSQ H03VV-F 3G 1.5MMSQ H05VV-F 3G 0.75MMSQ	16A 250V	*
WS-018	H03VVH2-F 2C 0.5MMSQ H03VV-F 3G 0.75MMSQ H05VVH2-F 2C 0.75MMSQ H05VV-F 3G 1.0MMSQ H03VV-F 3G 1.5MMSQ H05VV-F 3G 0.75MMSQ	16A 250V	*
WS-018-1	H03VVH2-F 2C 0.5MMSQ H03VV-F 3G 0.75MMSQ H05VVH2-F 2C 0.75MMSQ H05VV-F 3G 1.0MMSQ H03VV-F 3G 1.5MMSQ H05VV-F 3G 0.75MMSQ	16A 250V	


* Under Application for Approval






R . India Plugs

2 Pin Plugs, 2.5A 250V




WS-006F




WS-006F-1
Ultrasonic welding


3 Pin Plugs, 6A 10A 250V



WS-018




WS-018-1



WS-18-B
10A, Ultrasonic welding

3 Pin Plugs, 10A 16A 250V



WS-016



Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-006F	H03VVH2-F 2C 0.75MMSQ H05VVH2-F 2C 0.75MMSQ	2.5A 250V	*
WS-018 WS-018-1	H05VV-F 3G 0.75,1.0MMSQ YMHS(st) 3G 0.75,1.0MMSQ	6A, 10A 250V	*
WS-016	H05VV-F 3G 1.0MMSQ H05VV-F 3G 1.5MMSQ	10A, 16A 250V	*

* Under Application for Approval






Molded Plugs


L . Italy Plugs

2 Pin Straight Plugs
10A 250V




WS-006B

2 Pin Straight Plugs
16A 250V




WS-019

2 Pin Elbow Plugs
16A 250V




WS-019A

3 Pin Straight Plugs
10A 250V




WS-013

3 Pin Straight Plugs
16A 250V




WS-013(Large SR)

3 Pin Straight Plugs
16A 250V




WS-013A



WS-010A

3 Pin Elbow Plugs
16A 250V



WS-010



Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-006B	H05RR-F 2*0.75,1.0MMSQ H05RN-F 2*0.75,1.0MMSQ H05VV-F 2*0.75,1.0MMSQ H05VVH2-F 2*0.75MMSQ H03VVH2-F 2*0.75MMSQ	10A 250V	
WS-019 WS-019A	H03VV-F 2C 0.75MMSQ H03VVH2-F 2C 0.75MMSQ H05VV-F 2C 0.75/1.0/1.5MMSQ H05VVH2-F 2C 0.75MMSQ H05RR-F 2C 0.75/1.0/1.5MMSQ H05RN-F 2C 0.75/1.0MMSQ H05RNH2-F 2C 1.5MMSQ	16A 250V	
WS-013	H03VV-F 3*0.75MMSQ H05VV-F 3*0.75,1.0,1.5MMSQ H05RN-F 3*0.75,1.0MMSQ H05RR-F 3*0.75,1.0,1.5MMSQ	10A 250V	
WS-013A	H05VV-F 3G 1.5MMSQ H05RR-F 3G 1.5MMSQ	16A 250V	
WS-010A WS-010	H03VV-F 3G 0.75MMSQ H05VV-F 3G 0.75~1.5 MMSQ H05RR-F 3G 0.75~1.5MMSQ H05RN-F 3G 0.75~1.0MMSQ H07RN-F 3G 1.0,1.5,2.5MMSQ H03RT-H 3G 0.75MMSQ H05BB-F 3G 1.0,1.5MMSQ	16A 250V	







Molded Plugs

M . Switzerland Plugs


2 Pin Straight Plugs
2.5A 250V

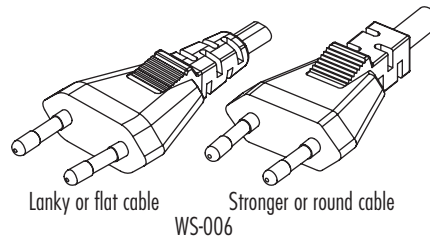


2 Pin Plugs
10A 250V



3 Pin Plugs
10A 250V



3 Pin T Plugs
10A 250V





Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-006	H03VV-F 2*0.75MMSQ H05VV-F 2*0.75	2.5A 250V	
WS-014A	H03VVH2-F 0.75*2C H05VVH2-F 0.75* 2C	10A 250V	
WS-014	H05VV-F 3G 0.75-1.5MMSQ H05RR-F 3G 0.75-1.5MMSQ	10A 250V	
WS-207	H05VV-F 0.75~1.5MMSQ H05RR-F 0.75~1.5MMSQ H05RN-F 0.75~1.0MMSQ	10A 250V	*

* Under Application for Approval

H03VVH2-F 2*0.75
 H05VVH2-F 2*0.75
 H03VV-F 2*0.75
 H05VV-F 2*0.75
 H05VV-F 3*0.75
 H05VV-F 3*1.0
 H03Z1Z1H2-F 2*0.75
 H05Z1Z1H2-F 2*0.75
 H03Z1Z1-F 3*0.75
 H05Z1Z1-F 3*0.75
 H05Z1Z1-F 3*1.0
 H05V2V2-F 2*0.75
 H05V2V2-F 2*1.0
 H05V2V2H2-F 2*0.75
 H05V2V2H2-F 2*1.0

Molded Type Plugs







Molded Plugs

N . UK Plugs


3 Pin Plugs




WS-012A
With Fuse




WS-012A-A (small body)
(Flat SR) With fuse




WS-012A-1 (small strain relief protector)
(Plastic Grounding Pin) With Fuse




WS-012D (Plastic Grounding Pin)
With Fuse & EMI inductance




WS-012E
Ultrasonic welding assembly




WS-012E-1
Ultrasonic welding assembly




WS-012A-3
With Fuse
Customer exclusive




WS-012A-4
With Fuse
Customer exclusive




WS-012A-5
With Fuse
Customer exclusive




WS-012A-6
With Fuse
Customer exclusive



WS-012A-7
With Fuse
Customer exclusive




WS-012A-8
With Fuse
Customer exclusive



WS-012A-10
With Fuse
Customer exclusive

Information

Model No.	Applicable Cable	Rating	Approval
WS-012A	H05VV-F 3*0.75,1.0,1.5 H03VV-F 3*0.75 H05VVH2-F 2*0.75 H03VVH2-F 2*0.75	3A 250V 5A 250V 10A 250V 13A 250V	 SAS02203



Molded Plugs

Model No.	Applicable Cable	Rating	Approval
WS-012A (Metal Pin for "E")	H03VVH2-F 2*0.75 H05VVH2-F 2*0.75 H03VV-F 2*0.75 H05VV-F 2*0.75 H05VV-F 3*0.75 H05VV-F 3*1.0 H03Z1Z1H2-F 2*0.75 H05Z1Z1H2-F 2*0.75 H03Z1Z1-F 3*0.75 H05Z1Z1-F 3*0.75 H05Z1Z1-F 3*1.0 H05V2V2-F 2*0.75 H05V2V2-F 2*1.0 H05V2V2H2-F 2*0.75 H05V2V2H2-F 2*1.0	6A 250V 6A 250V 6A 250V 6A 250V 6A 250V 10A 250V 6A 250V 6A 250V 6A 250V 6A 250V 10A 250V 6A 250V 10A 250V 6A 250V 10A 250V	
WS-012A (Plastic Pin for "E")	H03VVH2-F 2*0.75 H05VVH2-F 2*0.75 H03VV-F 2*0.75 H05VV-F 2*0.75 H03Z1Z1H2-F 2*0.75 H05Z1Z1H2-F 2*0.75	6A 250V 6A 250V 6A 250V 6A 250V 6A 250V 6A 250V	
WS-012A	H05VV-F 3*0.75,1.0,1.5 H03VV-F 3*0.75 H05VVH2-F 2*0.75 H03VVH2-F 2*0.75	3A 250V 5A 250V 10A 250V 13A 250V	SAS02203
WS-012A-1 (Metal pin fro E)	H03VVH2-F 2*0.75 H05VVH2-F 2*0.75 H05V2V2-F 2*0.75 H05V2V2H2-F 2*0.75 H05V2V2-F 2*1.0 H05V2V2H2-F 2*1.0	6A/10A 250V	
WS-012A-1 (Plastic pin fro E) WS-012D	H03VVH2-F 2*0.75 H05VVH2-F 2*0.75	6A 250V	
WS-012E (Metal pin fro E)	H03VVH2-F 2*0.75 H05VVH2-F 2*0.75 H03VV-F 2*0.75 H05VV-F 2*0.75 H05VV-F 3*0.75,1.0 H03Z1Z1H2-F 2*0.75 H05Z1Z1H2-F 2*0.75 H05V2V2-F 2*0.75,1.0 H05V2V2H2-F 2*0.75,1.0 H03Z1Z1-F 3*0.75 H05Z1Z1-F 3*0.75,1.0	6A,10A 250V	
WS-012E (Plastic pin fro E)	H03VVH2-F 2*0.75 H05VVH2-F 2*0.75 H03VV-F 2*0.75 H05VV-F 2*0.75 H03Z1Z1H2-F 2*0.75 H05Z1Z1H2-F 2*0.75	6A 250V 6A 250V 6A 250V 6A 250V	

* Under Application for Approval







Molded Plugs

O . Singapore Plugs


3 Pin Plugs, 5A 10A 13A 250V



WS-012A
With Fuse




WS-012A-A (small)
With fuse



WS-012A-1 (small)
With Fuse

Information

Model No.	Applicable Cable	Rating	Approval
WS-012A	3 x 0.75 H03VV-F	5A	
	3 x 0.75 H05VV-F	5A	
	2 x 0.75 H03VVH2-F	5A	
	2 x 0.75 H05VVH2-F	5A	
	2 x 0.75 H05VV-F	5A	
	2 x 1.0 H05VV-F	10A	
	3 x 1.0 H05VV-F	10A	
	3 x 1.0 H05VV-F	13A	
	3 x 0.75 H03RT-F	5A	
	3 x 0.75 H05RR-F	5A	
	2 x 1.0 H05RR-F	10A	
	2 x 1.5 H05RR-F	13A 250V	
	3 x 1.5 H05RR-F	13A	
	3 x 1.5 H05RN-F	13A	
	2 x 0.75 H05RR-F	5A	
	2 x 0.75 H05RN-F	5A	
	3 x 0.75 H05RR-F	5A	
	3 x 0.75 H05RN-F	5A	
	2 x 1.0 H05RN-F	10A	
	3 x 1.0 H05RR-F	10A	
	3 x 1.0 H05RR-F	10A	
WS-012A-A	H05VVH2-F 2C 0.75MMSQ H05VVH2-F 2C 1.0MMSQ	5A 10A 13A 250V	*
WS-012A-1	H05RR-F 2C/3G 0.75/1.0/1.5MMSQ H05VV-F 2C/3G 0.75/1.0/1.5MMSQ H05VVH2-F 2C 0.75MMSQ	5A 10A 13A 250V	*


1.51





P . Hongkong Plugs

3 Pin Plugs



WS-012A (With Fuse)

Information


Model No.	Applicable Cable	Rating	Approval
WS-012A	H03RT-F 3G 0.75MMSQ	6A 250V	
	H05RR-F 2C 1.0MMSQ	10A 250V	
	H05RR-F 2C 1.5MMSQ	13A 250V	
	H05RN-F 2C 1.5MMSQ	13A 250V	
	H05RR-F 3G 0.75MMSQ	6A 250V	
	H05RR-F 3G 1.5MMSQ	13A 250V	
	H05RN-F 3G 1.5MMSQ	13A 250V	
	H05VV-F 3G 1.0MMSQ	10A 250V	
	H05RR-F 2C 0.75MMSQ	6A 250V	
	H05RN-F 2C 0.75MMSQ	6A 250V	
	H05RN-F 2C 1.0MMSQ	10A 250V	
	H05RR-F 3G 0.75MMSQ	6A 250V	
	H05RN-F 3G 0.75MMSQ	6A 250V	
	H05RR-F 3G 1.0MMSQ	10A 250V	
	H05RN-F 3G 1.0MMSQ	10A 250V	
	H05VV-F 3G 1.5MMSQ	13A 250V	




Molded Plugs

N . Saudi Arabia Plugs


3 Pin Plugs




WS-012A
With Fuse




WS-012A-A (small body)
(Flat SR) With fuse



WS-012A-1 (small strain relief protector)
(Plastic Grounding Pin) With Fuse




WS-012D (Plastic Grounding Pin)
With Fuse & EMI inductance



WS-012E
Ultrasonic welding assembly


Information

Model No.	Applicable Cable	Rating	Approval
WS-012A	H05VV-F 3*0.75,1.0,1.5 H03VV-F 3*0.75 H05VVH2-F 2*0.75 H03VVH2-F 2*0.75	3A 250V 5A 250V 10A 250V 13A 250V	 SAS02203
WS-012A-1	H03VVH2-F 2*0.75MMSQ H05VVH2-F 2*0.75MMSQ	3A 250V	SAS02203




Q . Malaysia Plugs

3 Pin Plugs



WS-012A-2 (With Fuse)



WS-012B

Information

Model No.	Applicable Cable	Rating	Approval
WS-012A-2	H03RT-F 3G 0.75MMSQ	6A 250V	*
	H05RR-F 2C 1.0MMSQ	10A 250V	
	H05RR-F 2C 1.5MMSQ	13A 250V	
	H05RN-F 2C 1.5MMSQ	13A 250V	
	H05RR-F 3G 0.75MMSQ	6A 250V	
	H05RR-F 3G 1.5MMSQ	13A 250V	
	H05RN-F 3G 1.5MMSQ	13A 250V	
	H05VV-F 3G 1.0MMSQ	10A 250V	
	H05RR-F 2C 0.75MMSQ	6A 250V	
	H05RN-F 2C 0.75MMSQ	6A 250V	
	H05RN-F 2C 1.0MMSQ	10A 250V	
	H05RR-F 3G 0.75MMSQ	6A 250V	
	H05RN-F 3G 0.75MMSQ	6A 250V	
	H05RR-F 3G 1.0MMSQ	10A 250V	
	H05RN-F 3G 1.0MMSQ	10A 250V	
	H05VV-F 3G 1.5MMSQ	13A 250V	
WS-012B	H03RT-F 3G 0.75MMSQ	6A 250V	*
	H05RR-F 2C 1.0MMSQ	10A 250V	
	H05RR-F 2C 1.5MMSQ	13A 250V	
	H05RN-F 2C 1.5MMSQ	13A 250V	
	H05RR-F 3G 0.75MMSQ	6A 250V	
	H05RR-F 3G 1.5MMSQ	13A 250V	
	H05RN-F 3G 1.5MMSQ	13A 250V	
	H05VV-F 3G 1.0MMSQ	10A 250V	
	H05RR-F 2C 0.75MMSQ	6A 250V	
	H05RN-F 2C 0.75MMSQ	6A 250V	
	H05RN-F 2C 1.0MMSQ	10A 250V	
	H05RR-F 3G 0.75MMSQ	6A 250V	
	H05RN-F 3G 0.75MMSQ	6A 250V	
	H05RR-F 3G 1.0MMSQ	10A 250V	
	H05RN-F 3G 1.0MMSQ	10A 250V	
	H05VV-F 3G 1.5MMSQ	13A 250V	

* Under Application for Approval







Molded Plugs

S . Brazil Plugs

2.5A 250V




WS-006




WS-006G-2


10A 250V




WS-004



WS-006-G




WS-311




WS-311-3


15A/16A
250V




WS-001F-2 NEMA 5-15P
Inner body



WS-001F-2 NEMA 5-15P




WS-001B






WS-311-2

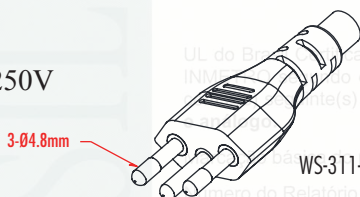20A 250V



WS-311-1

Information

Model No.	Applicable Cable	Rating	Approval
WS-006	60227IEC52 plano (H03VVH2-F) 2X0.75mm ² 60227IEC53 plano (H05VVH2-F) 2X0.75mm ²	2.5A 250V	*
WS-004	60227IEC53 plano (H05VVH2-F) 2X0.75mm ²	10A 250V	*
WS-006-G	60227IEC52 plano (H03VVH2-F) 2X0.75mm ² 60227IEC53 plano (H05VVH2-F) 2X0.75mm ²	10A 250V	 INMETRO OCP-0029
WS-311	60227 IEC53 (H05VV-F) 0.75-1.5MMSQ 3G	10A 250V	 INMETRO OCP-0029
WS-001F-2 WS-001B	60227 IEC 53 3*0.75~1.5MMSQ	15A 250V	*
WS-311-1	Circular (H05VV-F) 60227 IEC53 1, 1.5, 2.5MMSQ 3G	12A, 16A, 20A 250V	SEGURANÇA 


* Under Application for Approval






T . Mexico Plugs

2 Pin Plugs, 10A 125V



WS-004

3 Pin Plug, 10A 125VA



WS-001

Information

Model No.	Applicable Cable	Rating	Approval
WS-004	SVT 2C 0.75~1.0MMSQ	10A 125V	*
WS-001	SVT SH 18AWG*3G	10A 125V	<u>NOM</u>

* Under Application for Approval






Molded Plugs


U . USA and Canada Plugs

NEMA 1-15P Straight Plugs


2 Pole, 2 Wire Non-Grounding,
15 Ampere, 125 Volt




WS-004
Connect to flat cable




WS-004-1
Customer exclusive




WS-004-7
Customer exclusive




WS-004-16
Customer exclusive




WS-004-X
Ultrasonic Welding Assembly




WS-004A-1
Connect to round cable




WS-004B-2




WS-004C-1
With thick Cable Grip




WS-004C-1A
With thin Cable Grip




WS-004C-3
With Cable Grip




WS-004C-4
With Cable Grip




WS-004D
with Fuse




WS-004E
With EMI Suppressor




WS-004E-1
With EMI Suppressor




WS-004F




WS-004-13
Customer exclusive




WS-004-M
Waterproof Plug




WS-004-T
Waterproof Plug



WS-004-17
Customer exclusive

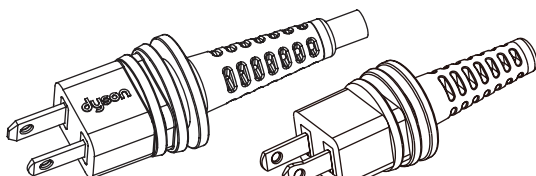


WS-004-3
Customer exclusive



WS-004-11
Twist and Lock Secure System











1.57





Molded Plugs

Information


Model No.	Applicable Cable	Rating	Approval
WS-004	(SPT-1, SPT-2, NISPT-1, NI SPT-2, HPN) 18AWG*2C (SPT-2, NISPT-2, HPN) 16AWG*2C	10A 13A 125V	 c 
WS-004A-1 WS-004C-1 WS-004C-3	(SVT, SV, SJO, SJ, SJT, SJTOW, SJTW, STOW, STW) 18AWG*2C SVT 17AWG*2C (SJT, SV, SJO, SJ, SJTOW, SJTW, STOW, STW) 16AWG*2C (SJT, SV, SJO, SJEOW, SJTOW, SJTW, STOW, STW) 14AWG*2C	10A/12A/13A /15A 125V	 c 
WS-004C-4	SJT 14AWG*2C	10A/12A/13A /15A 125V	*
WS-004B-2	SPT-1, SPT-2, NISPT-1, NISPT-2, HPN 18/2C SPT-2, NISPT-2, HPN 16/2C	10A 13A 125V	 c 
WS-004C-2 WS-004-M WS-004-T	(SVT, SV, SJO, SJ, SJT, SJTOW, SJTW, STOW, STW) 18AWG*2C SVT 17AWG*2C (SJT, SV, SJO, SJ, SJTOW, SJTW, STOW, STW) 16AWG*2C (SJT, SV, SJO, SJEOW, SJTOW, SJTW, STOW, STW) 14AWG*2C	10A /12A /13A /15A 125V	*
WS-004D	NISPT-2 18AWG*2C	2A 125V	 c 
WS-004E WS-004E-1	NI SPT-2 18AWG*2C	7A 125V	 c 
WS-004F	(SPT-1, NISPT-1, SPT-2, NI SPT-2, HPN) 18AWG*2C (SPT-2, NISPT-2, HPN) 16AWG*2C	15A 125V	*

* Under Application for Approval







Molded Plugs




WS-004-L
Easy Pull Smart Plug
PATENTED




WS-005-M
Easy Pull Smart Plug



WS-004C-2 With Cable Grip
Easy Pull Smart Plug
PATENTED




WS-005-L
Easy Pull Smart Plug
PATENTED




WS-004-W
Easy Pull Smart Plug
Ultrasonic Welding Assembly

1.59

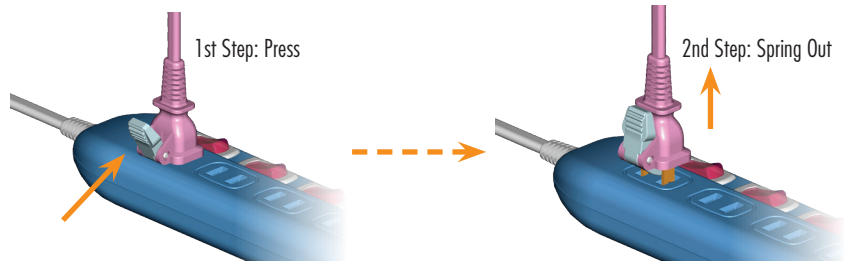


Easy-Pull Smart Plug






Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-004-L	(SVT,SV,SJO,SJ,SJT,SPT-1, NISPT-1,SPT-2) 18AWG*2C SVT 17AWG*2C (SJT,SV,SJO,SJ) 16AWG*2C (SJT,SV,SJ,SJO,SJEOW) 14AWG*2C	10A/12A/13A/15A 125V	 c 
WS-005-L WS-005-M	(SVT, SV, SJO, SJ, SJT,SJTOW,SJTW,STOW,STW) 18AWG*2C SVT 17AWG*2C (SJT, SV, SJO, SJ,SJTOW,SJTW,STOW,STW) 16AWG*2C (SJT,SV,SJO,SJEOW,SJTOW,SJTW,STOW,STW) 14AWG*2C	10A /12A /13A /15A 125V	*
WS-004-X	SPE-2, NISPE-1, NISPE-2,SPT-2 (TPE), NISPT-1 (TPE), NISPT-2 TPE),SPT-2, NISPT-1, NISPT-2;16/2SPE-2, NISPE-2,SPT-2 (TPE), NISPT-2 (TPE),SPT-2, NISPT-2 18AWG*2C	7A /10A /13A 125V	
WS-004-2	NISPE-2 E331859 VW-1 18AWG*2C	10A 125V	*

* Under Application for Approval







Molded Plugs

NEMA 1-15P Elbow Plugs


2 Pole, 2 Wire Non-Grounding, elbow plugs
15 Ampere, 125 Volts




WS-004K-1-4
4-Position angle plug




WS-004-0



WS-004-P




WS-004-S
8-Position angle plug




WS-004-R
(with inner body)


Customer exclusive



WS-004-N
With Easy Pull
PATENTED




WS-005-0
With Easy Pull
PATENTED




WS-004-9

Customer exclusive




WS-004-12

Customer exclusive




WS-004-14

Customer exclusive



WS-004-15


Customer exclusive




WS-004-Q
8-Position angle plug

Customer exclusive

Slim Plug




Space Saving



WS-004-Q Plug

Protection against fire









1.61





Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-004K-1~4	(SVT, SV, SJO, SJ, SJT, SJTOW, SJTW, STOW, STW) 18AWG*2C SVT 17AWG*2C (SJT, SV, SJO, SJ, SJTOW, SJTW, STOW, STW) 16AWG*2C (SJT, SV, SJO, SJ, SJTOW, SJTW, STOW, STW) 14AWG*2C	10A/12A/13A /15A 125V	*
WS-004-O NEMA 1-15P	(SVT, SV, SJO, SJ, SJT, SJTOW, SJTW, STOW, STW) 18AWG*2C SVT 17AWG*2C (SJT, SV, SJO, SJ, SJTOW, SJTW, STOW, STW) 16AWG*2C (SJT, SV, SJO, SJ, SJTOW, SJTW, STOW, STW) 14AWG*2C	10A/12A/13A /15A 125V	*
WS-004-P NEMA 1-15P	SPT-1 18AWG*2C NISPT-1 18AWG*2C SPT-2 18AWG*2C NISPT-2 18AWG*2C	15A 125V	*
WS-004-R (with inner body)	SPT-1, SPT-2 18AWG*2C	10A 125V	 c 
WS-004-N WS-005-O	(SVT, SV, SJO, SJ, SJT, SJTOW, SJTW, STOW, STW) 18AWG*2C SVT 17AWG*2C (SJT, SV, SJO, SJ, SJTOW, SJTW, STOW, STW) 16AWG*2C (SJT, SV, SJO, SJ, SJTOW, SJTW, STOW, STW) 14AWG*2C	10A/12A/13A/15A 125V	*
WS-004-S	SPT-1 18AWG*2C	7A 125V	 c 
WS-004-Q	(SPT-2, SJT, SJTW) 18AWG*2C (SPT-2, SJT, SJTW) 16AWG*2C (SJT, SJTW) 14AWG*2C	10A/13A/15A 125V	 c 

* Under Application for Approval







Molded Plugs

NEMA 1-15P/R T Shape Plugs


2 Pole, 2 Wire Non-Grounding
15 Ampere, 125 Volts




WS-021




WS-021-1
dapper




WS-021-2
(with hole)




WS-021-3



WS-021-4



WS-021A-1~8
With Ear
8-Position angle plug













*WS-021B-1~8
Ultrasonic welding, With Ear
8-Position angle plug




Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-021	(SPT-2, SVT) 18AWG*2C	10A 125V	 c 
WS-021-1	(SPT-2, SVT) 18AWG*2C	10A 125V	 c 
WS-021-2	(SPT-2, SVT) 18AWG*2C	10A 125V	 c 
WS-021-3	(SPT-2, SVT) 18AWG*2C	10A 125V	 c 
WS-021-4	(SPT-2, SVT) 18AWG*2C	10A 125V	*
WS-021A-1~8	(SPT-2, SVT) 18AWG*2C	10A 125V	 c 
WS-021B-1~8	(SPT-2, SVT) 18AWG*2C	10A 125V	*

* Under Application for Approval







Molded Plugs

NEMA 5-15P Straight Plugs


2 Pole, 3 Wire Grounding
15 Ampere, 125 Volts




WS-001




WS-001 (with Neon Light)




Neon Light




WS-001
Inner body




WS-001A
1 to 2 Cables




WS-001A-1
Mount




WS-001A-3
with 3A or 7A Fuse




WS-001A-4
Urea Housing




WS-001A-5
With Breather Tube




WS-001A-6




WS-001A-7




WS-001E-1
with EMI Shielding




WS-001F-2
Inner body



WS-001F-2




WS-001-17
Ultrasonic welding assembly




WS-001-10

Customer exclusive






WS-001A-12

Customer exclusive



WS-001-5
Cable "L"















1.65





Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-001	18/3 SV, SPT-1, SPT-2, SPT-3, HPN, SVT, SVT shielded, SJT, SJTW, SJTO, SJTOW, SJTOOW, SJT shielded, SJTW shielded, SJE, SJEOW, SJ, SJO, ST, STO, STW, STOW 17/3 SV 16/3 SV, SPT-2, SPT-3, HPN, SJT, SJTO, SJTW, SJTOW, SJTOOW, SJT shielded, SJTW shielded, SJE, SJEOW, SJ, SJO, ST, STW, STO, STOW 14/3 SPT-3, SJT, SJT shielded, SJTO, SJTW, SJTOW, SJTOOW, SJE, SJEOW, SJ, SJO, ST, STO, STW, STOW 12/3 SJT, SJT shielded, SJTW, SJTOW, SJTOOW, SJE, SJEOW, ST, STO, STOW, STW	10A/12A/13A/ 15A/15A 125V	 c 
WS-001A	SVT 18AWG*3C	15A 125V	*
WS-001A-1	1015 18AWG 1015 16AWG 1015 14AWG	15A 125V	*
WS-001A-3	SVT,SJT,SJTW,SJTOW,SJTOOW 18AWG/3	3A/7A 125V	 c 
WS-001A-4	(SVT,SJT,SJTW,SJTOW,SJTOOW) 18AWG/3 (SJT,SJTW,SJTOW,SJTOOW) 16AWG/3 (SJT,SJTW,SJTOW,SJTOOW) 14AWG/3	10/13/15A 125V	 c 
WS-001A-5	(SV, SPT-1, SPT-2, SPT-3, HPN, SVT, SJT, SJO, SJ, SJTO, SJTW, SJE, SJEOW, SVT shielded, SJT shielded, ST, STO, STOW, SJTOW, SJTOOW, STW) 18AWG*3C; SV 17AWG*3C (SV, SPT-2, SPT-3, HPN, SJT, SJO, SJTO, SJTW, SJE, SJEOW, SJ, SJT shielded, ST, STO, STOW, SJTOW, SJTOOW, STW) 16AWG*3C; (SPT-3, SJT, SJTW, SJE, SJEOW, SJTO, SJ, SJO, ST, STO, STOW, SJTOW, SJTOOW, STW) 14AWG*3C	10/13/15A 125V	*
WS-001A-6	(SV, SPT-1, SPT-2, SPT-3, HPN, SVT, SJT, SJO, SJ, SJTO, SJTW, SJE, SJEOW, SVT shielded, SJT shielded, ST, STO, STOW, SJTOW, SJTOOW, STW) 18AWG*3C; SV 17AWG*3C (SV, SPT-2, SPT-3, HPN, SJT, SJO, SJTO, SJTW, SJE, SJEOW, SJ, SJT shielded, ST, STO, STOW, SJTOW, SJTOOW, STW) 16AWG*3C; (SPT-3, SJT, SJTW, SJE, SJEOW, SJTO, SJ, SJO, ST, STO, STOW, SJTOW, SJTOOW, STW) 14AWG*3C (SJT,SJTW,SJTOW, SJTOOW,SJE,SJEOW,ST,STO,STOW,STW) 12AWG*3C	10/13/15A 125V	 c 
WS-001A-7	(SV, SPT-1, SPT-2, SPT-3, HPN, SVT, SJT, SJO, SJ, SJTO, SJTW, SJE, SJEOW, SVT shielded, SJT shielded, ST, STO, STOW, SJTOW, SJTOOW, STW) 18AWG*3C; SV 17AWG*3C (SV, SPT-2, SPT-3, HPN, SJT, SJO, SJTO, SJTW, SJE, SJEOW, SJ, SJT shielded, ST, STO, STOW, SJTOW, SJTOOW, STW) 16AWG*3C; (SPT-3, SJT, SJTW, SJE, SJEOW, SJTO, SJ, SJO, ST, STO, STOW, SJTOW, SJTOOW, STW) 14AWG*3C (SJT,SJTW,SJTOW, SJTOOW,SJE,SJEOW,ST,STO,STOW,STW) 12AWG*3C	10/13/15A 125V	 c 
WS-001E-1	(SV, SPT-1, SPT-2, SPT-3, HPN, SVT, SJT, SJO, SJ, SJTO, SJTW, SJE, SJEOW, SVT shielded, SJT shielded, ST, STO, STOW, SJTOW, SJTOOW, STW) 18AWG*3C; SV 17AWG*3C (SV, SPT-2, SPT-3, HPN, SJT, SJO, SJTO, SJTW, SJE, SJEOW, SJ, SJT shielded, ST, STO, STOW, SJTOW, SJTOOW, STW) 16AWG*3C; (SPT-3, SJT, SJTW, SJE, SJEOW, SJTO, SJ, SJO, ST, STO, STOW, SJTOW, SJTOOW, STW) 14AWG*3C (SJT,SJTW,SJTOW, SJTOOW,SJE,SJEOW,ST,STO,STOW,STW) 12AWG*3C	10/13/15A 125V	*
WS-001F-2	(SV, SPT-1, SPT-2, SPT-3, HPN, SVT, SJT, SJO, SJ, SJTO, SJTW, SJE, SJEOW, SVT shielded, SJT shielded, ST, STO, STOW, SJTOW, SJTOOW, STW) 18AWG*3C; SV 17AWG*3C (SV, SPT-2, SPT-3, HPN, SJT, SJO, SJTO, SJTW, SJE, SJEOW, SJ, SJT shielded, ST, STO, STOW, SJTOW, SJTOOW, STW) 16AWG*3C; (SPT-3, SJT, SJTW, SJE, SJEOW, SJTO, SJ, SJO, ST, STO, STOW, SJTOW, SJTOOW, STW) 14AWG*3C (SJT,SJTW,SJTOW, SJTOOW,SJE,SJEOW,ST,STO,STOW,STW) 12AWG*3C	10/13/15A 125V	 c 
WS-001I-5	SPT-3, SJTO, ST, SJT, SJO, SJ 14AWG*3C SJT, SJTO, ST, SJO, SJ 12AWG*3C	10/13/15A 125V	*
WS-001-17	SVT,SVT(shielded),SJT,SJT(shielded),SJTO,SJTW,SJTOW,SJTOOW,SVE,SVE(shielded),SJE,SJE(shielded),SJEOW,SJEOW,SVT(TPE),SVT(shielded) TPE,SJT(TPE),SJT(shielded) TPE,SJTO(TPE),SJTW(TPE),SJTOW(TPE),SJTOOW(TPE) 18AWG*3C SJT,SJT(shielded),SJTO,SJTW,SJTOW,SJTOOW,SJE,SJE(shielded),SJEOW,SJEOW,SJEOW,SJT(TPE),SJT(shielded) TPE,SJTO(TPE),SJTW(TPE),SJTOW(TPE),SJTOOW(TPE) 16AWG*3C	10/13A 125V	*


* Under Application for Approval






Molded Plugs


2 Pole, 3 Wire Grounding
15 Ampere, 125 Volts




WS-001G-2
With Cable Grip




WS-001G-2A
With Cable Grip




WS-001A-8
With Screw Hole




WS-001Z-3
Easy Pull Smart Plug
Ultrasonic Welding Assembly




WS-001G
With Cable Grip



WS-001G-4
With Cable Grip and Neon light,
big size




WS-001G-3
With Cable Grip




WS-001Z
Easy Pull Smart Plug
PATENTED


2 Pole, 3 Wire Grounding, Waterproof Plugs
15 Ampere, 125 Volts



WS-001Y-1




WS-001-2
material: TPE



WS-001-15
Indoor & Outdoor Use

Customer exclusive




WS-001-16
Twist and Lock Secure System

Easy-Pull Smart Plug

1st Step: Press

2nd Step: Spring Out

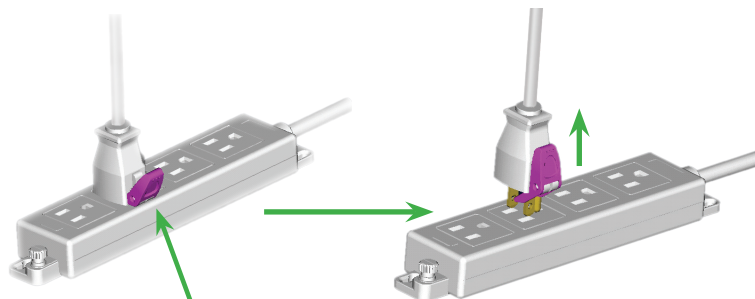




Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-001G	(SV, SPT-1, SPT-2, SPT-3, HPN, SVT, SJT, SJO, SJ, SJTO, SJTW, SJE, SJE0, SVT shielded, SJT shielded, ST, STO, STOW, SJTOW, SJTOOW, STW) 18AWG*3C; SV 17AWG*3C (SV, SPT-2, SPT-3, HPN, SJT, SJO, SJTO, SJTW, SJE, SJE0, SJ, SJT shielded, ST, STO, STOW, SJTOW, SJTOOW, STW) 16AWG*3C; (SPT-3, SJT, SJTW, SJE, SJE0, SJTO, SJ, SJO, ST, STO, STOW, SJTOW, SJTOOW, STW) 14AWG*3C (SJT, SJTW, SJTOW, SJTOOW, SJE, SJE0, ST, STO, STOW, STW) 12AWG*3C	10A/13A/ 15A 125V	
WS-001G-3	SJTOW 14AWG 3C	10A/13A/ 15A 125V	*
WS-001G-2 With Cable Grip	SJT 14AWG 3C	10A/13A/ 15A 125V	*
WS-001G-2A With Cable Grip	SJT 12AWG 3C	10A/13A/ 15A 125V	*
WS-001A-8	SJTW 12~18AWG 3C	10A/13A/ 15A 125V	*
WS-001Z	(SV, SPT-1, SPT-2, SPT-3, HPN, SVT, SJT, SJO, SJ, SJTO, SJTW, SJE, SJE0W, SVT (SHIELDED), SJT (SHIELDED), ST, STO, STOW) 18AWG 3C SV, SVT 17AWG 3C (SV, SPT-1, SPT-2, SPT-3, HPN, SJT, SJO, SJ, SJTO, SJTW, SJE, SJE0W, SJT (SHIELDED), ST, STO, STOW) 16AWG 3C (SJTW, SJE, SJE0W, ST, STO, STOW) 12AWG 3C	10A/12A/13A/15A/15 A 125V	c
WS-001Y-1	(SV, SPT-1, SPT-2, SPT-3, HPN, SVT, SJT, SJO, SJ, SJTO, SJTW, SJE, SJE0, SVT shielded, SJT shielded, ST, STO, STOW, SJTOW, SJTOOW, STW) 18AWG*3C; SV 17AWG*3C (SV, SPT-2, SPT-3, HPN, SJT, SJO, SJTO, SJTW, SJE, SJE0, SJ, SJT shielded, ST, STO, STOW, SJTOW, SJTOOW, STW) 16AWG*3C; (SPT-3, SJT, SJTW, SJE, SJE0, SJTO, SJ, SJO, ST, STO, STOW, SJTOW, SJTOOW, STW) 14AWG*3C (SJT, SJTW, SJTOW, SJTOOW, SJE, SJE0, ST, STO, STOW, STW) 12AWG*3C	10A/13A/ 15A 125V	*
WS-001-2	(SV, SPT-1, SPT-2, SPT-3, HPN, SVT, SJT, SJO, SJ, SJTO, SJTW, SJE, SJE0, SVT shielded, SJT shielded, ST, STO, STOW, SJTOW, SJTOOW, STW) 18AWG*3C; SV 17AWG*3C (SV, SPT-2, SPT-3, HPN, SJT, SJO, SJTO, SJTW, SJE, SJE0, SJ, SJT shielded, ST, STO, STOW, SJTOW, SJTOOW, STW) 16AWG*3C; (SPT-3, SJT, SJTW, SJE, SJE0, SJTO, SJ, SJO, ST, STO, STOW, SJTOW, SJTOOW, STW) 14AWG*3C (SJT, SJTW, SJTOW, SJTOOW, SJE, SJE0, ST, STO, STOW, STW) 12AWG*3C	10A/13A/ 15A 125V	*
WS-001-15 Indoor & Outdoor	14/3 12/3 SJT, SJTW, SJTOW, SJTOOW 10/3 ST, STW, STOW, STOOOW	15A 125V	c
WS-001-16	16/3, 14/3, 12/3 SJT, SJTW, SJTOW, SJTOOW	13, 15, 15A/125V	c

* Under Application for Approval







Molded Plugs

NEMA 5-15P Elbow Plugs


2 Pole, 3 Wire Grounding
15 Ampere, 125 Volts




WS-001B




WS-001Z-1
PATENTED




WS-001B-14




WS-001C-1




WS-001C-5(5-15P)
Cable "L"




WS-001M-5(5-15P)
Cable "L"




WS-001M-1
Ground "O"




WS-001M-1
Ground "U"




WS-001B-25
1 to 2 Cables




WS-001G-1
With Cable Grip




WS-001B-36




WS-001-13-1
Twins NEMA 5-15P




WS-001B-55




WS-001B-38
Temperature Control Delay




WS-001B-39
Timer




WS-001B-40
Dawn to Dusk Photosensor




WS-001B-40A
Light and Dark Control Delay



WS-001B-41
Sound Control Delay



WS-001B-42
Touch Control Delay



WS-001B-49
Blue Tooth Remote + Touch
Control Delay

1.69









www.wellshin.com.tw





Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-001B	(SPT-1, SPT-2, SPT-3, SVT, SVT shielded SJT, SJT shielded, SJTW, SJTW shielded, SJTOW, SJTOOW, HPN) 18AWG 3C; (SPT-2, SPT-3, SJT, SJT shielded, SJTW, SJTW shielded, SJTOW, SJTOOW, HPN) 16AWG 3C (SPT-3, SJT) 14AWG 3C	10/13/15A 125V	 c 
WS-001Z-1	(SV,SPT-1,SPT-2,SPT-3, HPN, SVT,SJT,SJO,SJ,SJTO,SJTW,SJE,SJEOW,SVT(SHIELDED),SJT(SHIELDED),ST,STO,STOW) 18AWG 3C SV,SVT 17AWG 3C (SV,SPT-1,SPT-2,SPT-3,HPN, SJT,SJO,SJ,SJTO,SJTW,SJE,SJEOW, SJT(SHIELDED),ST,STO,STOW) 16AWG 3C (SJTW, SJE, SJEOW, ST, STO, STOW) 12AWG 3C	10/12/13/15/15 A 125V	*
WS-001B-14	SPT-2 14AWG*2C +1015 14AWG SPT-3 16AWG*2C+1015 16AWG	10/13/15A 125V	 c 
WS-001C-1 WS-001C-5(5-15P)	18/3 SPT-3, SJT, SJT shielded, SJTW, SJTW shielded, SJTO, SJTOW, SJTOOW, SJ 16/3 SJT, SJT shielded, SJTW, SJTW shielded, SJTOW, SJTOOW 14/3 SPT-3, SJT, SJTW, SJTO, ST, SJ 12/3 SJT, SJTW, SJTO, ST, SJ	10/13/15A 125V	 c 
WS-001M-1 WS-001M-5(5-15P)	18/3 SPT-3, SJT, SJTW, SJTO, SJ 14/3 SPT-3, SJT, SJTW, SJTO, ST, SJ 12/3 SJT, SJTW, SJTO, ST, SJ	10/15A 125V	 c 
WS-001G-1	ST 14AWG*3C	15A 125V	*
WS-001B-36	STW 10AWG*3C; SRDT 10AWG*3C(flat)		
WS-001-13-1	STW 10AWG 3C STW 10AWG 4C	15A 125V	*


* Under Application for Approval






Molded Plugs


2 Pole, 3 Wire Grounding
15 Ampere, 125 Volts




WS-001B-1~8
8-Position angle plug




WS-001D-1-1~8
8-Position angle plug




WS-001B-17~24
8-Position angle plug




WS-001B-31
With LED




WS-001D-5-1~8
8-Position angle plug



WS-001B-30
With Circuit Breaker




WS-001B-16
(WITH EMI)
Ultrasonic welding




WS-001E-5
(WITH EMI)
Ultrasonic welding


Building wiring fault indicator light




WS-001B-28
Ultrasonic welding assembly




WS-001H-15A-1~8
8-Position angle plug
Customer exclusive



WS-001B-37-a~d
4-Position angle plug




WS-001B-32
8-Position angle plug
Ultrasonic welding assembly




WS-001B9-a~i
9-Position angle plug
Customer exclusive


Slim Plug



Space Saving



Protection against fire



1.71













• 8 & 9-Position angle plug is available.

www.wellshin.com.tw



Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-001B-1~8	(SPT-1, SPT-2, SPT-3, SVT, SVT shielded SJT, SJT shielded, SJTW, SJTW shielded, SJTOW, SJTOOW, HPN) 18AWG 3C; (SPT-2, SPT-3, SJT, SJT shielded, SJTW, SJTW shielded, SJTOW, SJTOOW, HPN) 16AWG 3C (SPT-3, SJT) 14AWG 3C	10A/13A/15A 125V	 c 
WS-001B-17~24	(SPT-1, SPT-2, SPT-3, SVT, SVT shielded SJT, SJT shielded, SJTW, SJTW shielded, SJTOW, SJTOOW, HPN) 18AWG 3C; (SPT-2, SPT-3, SJT, SJT shielded, SJTW, SJTW shielded, SJTOW, SJTOOW, HPN) 16AWG 3C (SPT-3, SJT) 14AWG 3C	10A/13A/15A 125V	 c 
WS-001D-1~8 WS-001D-5-1~8	18/3 16/3 SPT-3, SVT, SJT, SJT shielded, SJTW, SJTW shielded, SJTO, SJTOW, SJTOOW, ST, STW, STOW 14/3 12/3 SPT-3, SJT, SJTW, SJTO, SJTOW, ST, STW, STOW	10A/13A/15A /15A 125V	 c 
WS-001B-30	SJTW 12AWG 3G	10A/12A/13A/15A/15 A 125V	★
WS-001B-31	SPT-3 14AWG 3G	15 A 125V	★
WS-001B-28	14AWG 3G	10A/12A/13A/15A/15 A 125V	★
WS-001B9-a-i WS-001B-31	18/3 16/3 SPT-3, SJT, SJT shielded, SJTW, SJTW shielded, SJTOW, SJTOOW 14/3 SJT	10A/13A/15A 125V	 c 
WS-001B-32 WS-001H-15A-1~8	18/3 SPT-1, SPT-2, SPT-3, SVT, SVT shielded SJT, SJT shielded, SJTW, SJTW shielded, SJTOW, SJTOOW, HPN 16/3 SPT-2, SPT-3, SJT, SJT shielded, SJTW, SJTW shielded, SJTOW, SJTOOW, HPN 14/3 SPT-3, SJT, ST, STW	10A/13A/15A 125V	★
WS-001B-37	(PT-2, SVT, SJT, SJTW, SJTO, SJTOW, SJTOOW, SJOW) 18AWG 3C (SJT, SJTW, SJTO, SJTOW, SJTOOW, SJOW) 16AWG 3C (SJT, SJTW, SJTO, SJTOW, SJTOOW, SJOW) 14AWG 3C	10, 13, 15A/125V	 c 

* Under Application for Approval



1.72







Molded Plugs

NEMA 5-15P/R T Shape Plugs


2 Pole, 3 Wire Grounding
15 Ampere, 125 Volts




WS-022B




WS-022B-12 Easy-Pull Smart
PATENTED




WS-022B-9




WS-022B-10 with Breather Tube




WS-022B-1~8
8-Position angle plug




WS-022C-1~8 with hole
8-Position angle plug



*WS-022D
Ultrasonic welding, Without Ear
8-Position angle plug



*WS-022E
Ultrasonic welding, With Ear
8-Position angle plug



WS-037-G
Easy-Pull Smart, Ultrasonic weld assembly





Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-022B	(SPT-2, SVT, SJT, SJTW, SJTO, SJTOW, SJTOOW) 18/3 (SJT, SJTW, SJTO, SJTOW, SJTOOW) 16/3 (SJT, SJTW, SJTO, SJTOW, SJTOOW) 14/3 SJTW 14/4	10A/13A/15A 125V	
WS-022B-9	SPT-2,SVT) 18AWG*3C SJT 16AWG*3C (SJT,SJTO) 14AWG*3C	10A/13A/15A 125V	
WS-022B-12	SPT-2,SVT) 18AWG*3C SJT 16AWG*3C (SJT,SJTO) 14AWG*3C	10A/13A/15A 125V	*
WS-022B-10	SJTW 16AWG*3C	15A 125V	*
WS-022B-1~8	(SPT-2, SVT) 18AWG*3C SJT 16AWG*3C (SJT,SJTO) 14AWG*3C	10A/13A/15A 125V	
WS-022C-1~8	(SPT-2, SVT) 18AWG*3C SJT 16AWG*3C (SJT,SJTO) 14AWG*3C	10A/13A/15A 125V	*
WS-022D WS-022E	(SPT-2, SVT) 18AWG*3C SJT 16AWG*3C (SJT,SJTO) 14AWG*3C	10A/13A/15A 125V	*
WS-037-G	SJT 16AWG*3C	15A 125V	*

* Under Application for Approval






Molded Plugs

NEMA 5-20P



2 Pole, 3 Wire Grounding
20 Ampere, 125 Volts



Straight Plugs




WS-001I-2




WS-001I-4
Cable "L"


Elbow Plugs




WS-001C-3




WS-001C-5 (5-20P)
Cable "L"



WS-001C-6
Cable "L"




WS-001D-7-1~8
8-Position angle plug




WS-001H-17A-1~8
8-Position angle plug

PATENTED


Customer exclusive




WS-001M-3
Ground "O"




WS-001M-3
Ground "U"




WS-001M-5 (5-20P)
Cable "L"




WS-001D-3-1~8
8-Position angle plug



WS-001C9-1~8
8-Position angle plug



WS-001-12
Twins NEMA 5-20P
Waterproof



WS-001-13
Twins NEMA 5-20P

1.75









- 8-Position angle plug is available.






Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-001I-2 WS-001I-4	18/3, 16/3 SJT, SJT shield, SJTW, SJTW shield, SJTOW, SJTOOW 14/3 SPT-3, SJT, SJTO, ST, SJ, SJO 12/3 SJT, SJTO, ST, SJ, SJO	10A/13A/18A/20A 125V	 c 
WS-001C-3 WS-001C-5 WS-001C-6	18/3 SPT-3, SJT, SJT shielded, SJTW, SJTW shielded, SJTO, SJTOW, SJTOOW, SJ 16/3 SJT, SJT shielded, SJTW, SJTW shielded, SJTOW, SJTOOW 14/3 SPT-3, SJT, SJTW, SJTO, ST, SJ 12/3 SJT, SJTW, SJTO, ST, SJ	10A/13A/18A/20A 125V	 c 
WS-001D-3-1~8 WS-001D-7-1~8	18/3 16/3 SPT-3, SVT, SJT, SJT shielded, SJTW, SJTW shielded, SJTO, SJTOW, SJTOOW, ST, STW, STOW 14/3 12/3 SPT-3, SJT, SJTW, SJTO, SJTOW, ST, STW, STOW	10A/13A/18A/20A 125V	 c 
WS-001H-17A-1~8	SJT 18AWG~14AWG*3C	10A/18A/20A 250V	*
WS-001M-3 WS-001M-5	18/3 SPT-3, SJT, SJTW, SJTO, SJ 14/3 SPT-3, SJT, SJTW, SJTO, ST, SJ 12/4 SJT, SJTW, SJTO, ST, SJ	10A/18A/20A 125V	 c 
WS-001C9-1~8	(SJT, SJTO, SPT-3, SJ, SJTW) 18AWG*3C (SPT-3, SJ, SJ, SJT, SJTO, SJTW) 14AWG*3C (SJ, ST, SJT, SJTO, SJTW) 12AWG*3C	10A/18A/20A 125V	*
WS-001-12	STW 12AWG*5C	20A 125V	*
WS-001-13	STW 10AWG*3C STW 10AWG*4C	20A 125V	*

* Under Application for Approval






Molded Plugs

NEMA 6-15P


2 Pole, 3 Wire Grounding
15 Ampere, 250 Volts





Straight Plugs



WS-001E-2
With EMI Shielding




WS-001I-1




WS-001I-7
Cable "L"


Elbow Plugs




WS-001B9-1




WS-001D-6-1~8
8-Position angle plug




WS-001D-2-1~8
8-Position angle plug




WS-001H-16A-1~8
8-Position angle plug
Customer exclusive




WS-001C-2




WS-001C-5(6-15P)
Cable "L"



WS-001M-2
Ground "O"





WS-001M-2
Ground "U"



WS-001M-5(6-15P)
Cable "L"

T Shape Plugs



WS-022B-11
with Breather Tube













- 8-Position angle plug is available.





Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-001E-2	(SJT,SJTW,SJTOW,SJTO,ST,STOW,STW,SVT) 18AWG *3C (SJT,SJTW,SJTOW,SJTO,ST,STOW,STW,) 16AWG *3C (SJT,SJTW,SJTOW,SJTO,ST,STOW,STW,) 14AWG *3C (S,ST,SJTW,SJTO,SJTW) 12AWG *3C	15A 250V	*
WS-001I-1 WS-001I-7	18/3, 16/3 SJT, SJT shield, SJTW, SJTW shield, SJTOW, SJTOOW 14/3 SPT-3, SJT, SJTO, ST, SJ, SJO 12/3 SJT, SJTO, ST, SJ, SJO	10,13,15/250	 c 
WS-001B9-1	18/3 16/3 SPT-3, SJT, SJT shielded, SJTW, SJTW shielded, SJTOW, SJTOOW 14/3 SJT	10A/13A/15A 250V	 c 
WS-001D-2-1~8 WS-001D-6-1~8	18/3 16/3 SPT-3, SVT, SJT, SJT shielded, SJTW, SJTW shielded, SJTO, SJTOW, SJTOOW, ST, STW, STOW 14/3 12/3 SPT-3, SJT, SJTW, SJTO, SJTOW, ST, STW, STOW	10A/13A/15A/15A 250V	 c 
WS-001M-2	(SJT,SJTO,SPT-3,SJ,SJTW) 18AWG*3C (SPT-3, SJ,ST,SJT,SJTO,SJTW) 14AWG*3C (S,ST,SJT,SJTO,SJTW) 12AWG*3C	10A/18A/20A 250V	 c 
WS-001H-16A-1~8	SJT 18AWG~14AWG*3C	10A/18A/20A 250V	*
WS-001C-2 WS-001C-5	18/3 SPT-3, SJT, SJT shielded, SJTW, SJTW shielded, SJTO, SJTOW, SJTOOW, SJ 16/3 SJT, SJT shielded, SJTW, SJTW shielded, SJTOW, SJTOOW 14/3 SPT-3, SJT, SJTW, SJTO, ST, SJ 12/3 SJT, SJTW, SJTO, ST, SJ	10A/13A/15A/15A 250V	 c 
WS-001M-2 WS-001M-5	18/3 SPT-3, SJT, SJTW, SJTO, SJ 14/3 SPT-3, SJT, SJTW, SJTO, ST, SJ 12/3 SJT, SJTW, SJTO, ST, SJ	10A/15A/15A 250V	 c 
WS-022B-11	SJTW 16AWG*3C	15A 125V	*

* Under Application for Approval






Molded Plugs

NEMA 6-20P


2 Pole, 3 Wire, Grounding
20 Ampere, 250 Volts




Straight Plugs



WS-001E-4
with EMI shielding




WS-001I-3

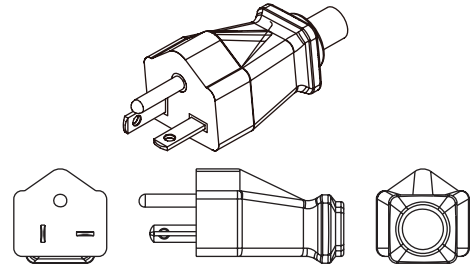


WS-001I-6
Cable "L"


Elbow Plugs




WS-001C8-1~8
8-Position angle plug



WS-001D-4-1~8
8-Position angle plug




WS-001D-8-1~8
8-Position angle plug




WS-001H-18-1~8-A
8-Position angle plug


Customer exclusive




WS-001C-4




WS-001C-5(6-20P)
Cable "L"




WS-001C-7
Cable "L"



WS-001M-4
Ground "O"



WS-001M-4
Ground "U"



WS-001M-5(6-20P)
Cable "L"

1.79






Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-001C8-1~8	SJT,SJTO,SPT-3,SJ,SJTW) 18AWG*3C(SPT-3, SJ,ST,SJT,SJTO,SJTW) 14AWG*3C(SJ,ST,SJT,SJTO,SJTW) 12AWG*3C	10A/18A/20A 250V	*
WS-001D-4-1~8 WS-001D-8-1~8	18/3 16/3 SPT-3, SVT, SJT, SJT shielded, SJTW, SJTW shielded, SJTO, SJTOW, SJTOOW, ST, STW, STOW 14/3 12/3 SPT-3, SJT, SJTW, SJTO, SJTOW, ST, STW, STOW	10A/13A/18A/20A 250V	UL c UL
WS-001H-18-1~8	SJT 18AWG~14AWG*3C	10A/18A/20A 250V	*
WS-001C-4 WS-001C-5 WS-001C-7	18/3 SPT-3, SJT, SJT shielded, SJTW, SJTW shielded, SJTO, SJTOW, SJTOOW, SJ 16/3 SJT, SJT shielded, SJTW, SJTW shielded, SJTOW, SJTOOW 14/3 SPT-3, SJT, SJTW, SJTO, ST, SJ 12/3 SJT, SJTW, SJTO, ST, SJ	10A/13A/18A/20A 250V	UL c UL
WS-001M-4 WS-001M-5	18/3 SPT-3, SJT, SJTW, SJTO, SJ 14/3 SPT-3, SJT, SJTW, SJTO, ST, SJ 12/6 SJT, SJTW, SJTO, ST, SJ	10A/18A/20A 250V	UL c UL
WS-001E-4	(SPT-3, SJT, SJO, SJTO, SJ,ST) 14AWG 3C (SJT, SJTO,SJO, SJ,ST) 12AWG 3C	18A/20A 250V	*
WS-001I-3 WS-001I-6	18/3,16/3 SJT, SJT shield, SJTW, SJTW shield, SJTOW, SJTOOW 14/3 SJOW, SJOO, SJOOOW, SJTW, SJTOW, SJTOO, SJTOOW, STW, STO, STOW, STOO, STOOOW 12/3 SJOW, SJOO, SJOOOW, SJTW, SJTOW, SJTOO, SJTOOW, STW, STO, STOW, STOO, STOOOW	10A/13A/18A/20A 250V	UL c UL

* Under Application for Approval







Molded Plugs

Hospital Grade Plug


 NEMA 5-15P,
2 Pole, 3 Wire Grounding, 10/13/15A 125V



WS-001H-6




WS-001H-7




WS-001H-8

Customer exclusive




WS-001H-10
cutdown


Customer exclusive



WS-001H-1




WS-001H-11-1~8
8-Position angle plug



WS-001H-15-1~8
8-Position angle plug


Customer exclusive




WS-001H-15-A
8-Position angle plug

Customer exclusive

 NEMA 6-15P,
2 Pole, 3 Wire Grounding, 10/13/15A 250V




WS-001H-2



WS-001H-12-1~8
8-Position angle plug


Customer exclusive




WS-001H-16-1~8
8-Position angle plug

Customer exclusive

 NEMA 5-20P,
2 Pole, 3 Wire Grounding, 10/13/20A 125V




WS-001H-3



WS-001H-13-1~8
8-Position angle plug


Customer exclusive




WS-001H-17-1~8
8-Position angle plug

Customer exclusive

 NEMA 6-20P, 2 Pole,
3 Wire Grounding, 10/13/20A 250V




WS-001H-4



WS-001H-14-1~8
8-Position angle plug

Customer exclusive




WS-001H-18-1~8
8-Position angle plug

Customer exclusive



Molded Plugs

* 8-Position angle plug is available. Cable SR 6 O'clock Earthing 0'clock

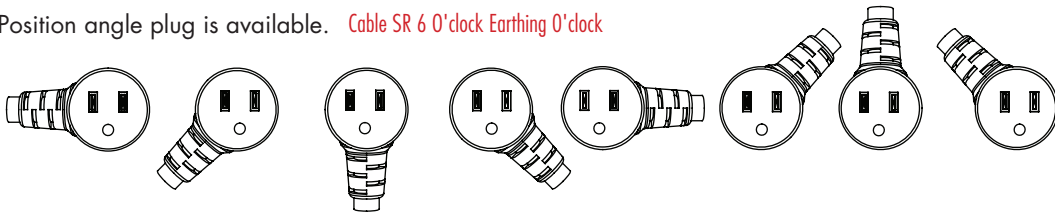

WS-001H-15-1
3p o'clock

WS-001H-15-2
4p5 o'clock

WS-001H-15-3

WS-001H-15-4
7p5 o'clock

WS-001H-15-5

WS-001H-15-6

WS-001H-15-7
0p o'clock

WS-001H-15-8


Information

Model No.	Applicable Cable	Rating	Approval
WS-001H-1 NEMA 5-15P	(SJT, SJT Shielded, SJTO, SJTW, SJTOW and SH) 18AWG*3C (SJT, SJT Shielded, SJTO, SJTW, SJTOW and SH) 16AWG*3C (SJT, SJT Shielded, SJTO, SJTW, SJTOW and SH) 14AWG*3C (SJT, SJT Shielded, SJTO, SJTW, SJTOW and SH) 12AWG*3C	10/13/15A 125V	c
WS-001H-6 NEMA 5-15P	18/3, 16/3, 14/3AWG type SJT, SJT Shielded, SJTW, SJTO, SJTOW	10/13/15A 125V	c
WS-001H-7 NEMA 5-15P WS-001H-8 NEMA 5-15P WS-001H-10 NEMA 5-15	18/3, 16/3AWG type SVT, SJT, SJT Shielded, SJTW, SJTO, SJTOW, 14/3AWG type SJT, SJT Shielded, SJTW, SJTO, SJTOW	10/13/15A 125V	c
WS-001H-11-1~8 NEMA 5-15P	(SJT, SJT Shielded, SJTO, SJTW, SJTOW and SH) 18AWG*3C (SJT, SJT Shielded, SJTO, SJTW, SJTOW and SH) 16AWG*3C (SJT, SJT Shielded, SJTO, SJTW, SJTOW and SH) 14AWG*3C (SJT, SJT Shielded, SJTO, SJTW, SJTOW and SH) 12AWG*3C	10/13/15A 125V	c
WS-001H-2 NEMA 6-15P WS-001H-12-1~8 NEMA 6-15	(SJT, SJT Shielded, SJTO, SJTW, SJTOW and SH) 18AWG*3C (SJT, SJT Shielded, SJTO, SJTW, SJTOW and SH) 16AWG*3C (SJT, SJT Shielded, SJTO, SJTW, SJTOW and SH) 14AWG*3C (SJT, SJT Shielded, SJTO, SJTW, SJTOW and SH) 12AWG*3C	10/13/15A 250V	c
WS-001H-3 NEMA 5-20P WS-001H-13-1~8	(SJT, SJT Shielded, SJTO, SJTW, SJTOW and SH) 18AWG*3C (SJT, SJT Shielded, SJTO, SJTW, SJTOW and SH) 16AWG*3C (SJT, SJT Shielded, SJTO, SJTW, SJTOW and SH) 14AWG*3C (SJT, SJT Shielded, SJTO, SJTW, SJTOW and SH) 12AWG*3C	10/13/18/20A 125V	c
WS-001H-4 NEMA 6-20P WS-001H-14-1~8	(SJT, SJT Shielded, SJTO, SJTW, SJTOW and SH) 18AWG*3C (SJT, SJT Shielded, SJTO, SJTW, SJTOW and SH) 16AWG*3C (SJT, SJT Shielded, SJTO, SJTW, SJTOW and SH) 14AWG*3C (SJT, SJT Shielded, SJTO, SJTW, SJTOW and SH) 12AWG*3C	10/13/18/20A 250V	c
WS-001H-15 NEMA 5-15P	(SJT, SJT Shielded, SJTW, SJTW Shielded, SJTO, SJTOW) 18/3, 16/3, 14/3, 12/3	10/13/15A 125V	c
WS-001H-15-A NEMA 5-15P	(SJT, SJT Shielded, SJTW, SJTW Shielded, SJTO, SJTOW, SJTOWW) 18/3, 16/3, 14/3, 12/3	10/13/15A 125V	c
WS-001H-16 (6-15P)	18/3, 16/3, 14/3, 12/3 SJT, SJT Shielded, SJTW, SJTW Shielded, SJTO, SJTOW	10/13/15A 250V	c
WS-001H-17 (5-20P)	18/3, 16/3, 14/3, 12/3 SJT, SJT Shielded, SJTW, SJTW Shielded, SJTO, SJTOW	10/13/18/20A 125V	c
WS-001H-18 (6-20P)	18/3, 16/3, 14/3, 12/3 SJT, SJT Shielded, SJTW, SJTW Shielded, SJTO, SJTOW	10/13/18/20A 250V	c

* Under Application for Approval

www.wellshin.com.tw







Molded Plugs

Twist Locking Plugs, 2 Pole 3 Wire Grounding

15 Ampere, 125 Volts




WS-118
NEMA L5-15P




WS-118-5
NEMA L5-15P

15 Ampere, 250 Volts




WS-123
NEMA L6-15P




WS-123-5
NEMA L6-15P

15 Ampere, 277 Volts AC




WS-226
NEMA L7-15P

20 Ampere, 125 Volts and 250 Volts




WS-117
NEMA L5-20P




WS-117-5
NEMA L5-20P

20 Ampere, 250 Volts




WS-119
NEMA L6-20P




WS-119-5
NEMA L6-20P

30 Ampere, 125 Volts and 250 Volts




WS-121
NEMA L5-30P




WS-121-5
NEMA L5-30P


30 Ampere, 250 Volts



WS-120
NEMA L6-30P




WS-120-3
NEMA L6-30P
small body



WS-120-5
NEMA L6-30P

20 Ampere, 277 Volts



WS-330
NEMA L7-20P

















1.83





Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-118 NEMA L5-15P	(SJT, SJTW, SJTOW, SJTOOW) 18/3 (SJT, SJTW, SJTO, SJTOW, SJ, SJO, STW) 16/3 (SJT, SJTW, SJTO, SJTOW, SJ, SJO, STW) 14/3 (SJT, SJTW, SJTO, SJ, SJO) 10/3 (SJT, SJTW, SJTO, SJ, SJO) 12/3	10A, 13A, 15A/125V	 c 
WS-123 NEMA L6-15P	(SJT, SJTW, SJTO, SJTOW, SJ, SJO, SJOW, SJOOOW, ST, STW, STO, STOW, STOO, STOOOW) 16/3 14/3 12/3 10/3 (ST, STW, STO, STOW, STOO, STOOOW) 8/3	13A, 15A/250V	 c 
WS-226 NEMA L7-15P	(SJT, SJTW, SJTOW, SJO, SJ) 18AWG*3C (SJT, SJTW, SJTOW, SJO, SJ) 14AWG*3C (SJT, SJTW, SJTOW, SJO, SJ) 12AWG*3C (SJT, SJTW, SJTOW, SJO, SJ) 10AWG*3C (SJT, SJTW, SJTO, SJO, SJ, STW, SJTOW) 16AWG*3C (STW, SJTOW) 14AWG*3C	10A/15A 277V AC	 c 
WS-117 NEMA L5-20P	(SJT, SJTW, SJTO, SJO, SJ) 14AWG*3C (SJT, SJTW, SJTO, SJO, SJ) 12AWG*3C (SJT, SJTW, SJTO, SJO, SJ) 10AWG*3C	18A, 20A 125V	 c 
WS-119 NEMA L6-20P	(SJT, SJTW, SJTO, SJTOW, SJ, SJO, SJOW, SJOOOW, ST, STW, STO, STOW, STOO, STOOOW) 16/3 14/3 12/3 10/3 (ST, STW, STO, STOW, STOO, STOOOW) 8/3	18A/20A 250V	 c 
WS-121 NEMA L5-30P	(SJT, SJTW, SJTO, SJTOW, SJ, SJO, SJOW, SJOOOW, ST, STW, STO, STOW, STOO, STOOOW) 16/3 14/3 12/3 10/3 (ST, STW, STO, STOW, STOO, STOOOW) 8/3	13A, 18A, 25A, 30A/125V	 c 
WS-120 NEMA L6-30P	(SJT, SJTW, SJTO, SJTOW, SJ, SJO, SJOW, SJOOOW, ST, STW, STO, STOW, STOO, STOOOW) 16/3 14/3 12/3 10/3 (ST, STW, STO, STOW, STOO, STOOOW) 8/3	13A, 18A, 25A, 30A/250V	 c 
WS-120-3 NEMA L6-30P	ST, STW, STO, STOW, STOO, STOOOW 16AWG*3C, 14AWG*3C, 12AWG*3C, 10AWG*3C	10A/25A/30A 250V	*
WS-330 NEMA L7-20P	SJT, SJTW, SJTO, SJTOW, ST, STW, STO, STOW, STOO, STOOOW, SJ, SJO, SJOW, SJOOOW 18AWG*3C, 16AWG*3C, 14AWG*3C, 12AWG*3C, 10AWG*3C	10A/13A/18A/20A, 20A 227V	 c 

* Under Application for Approval







Molded Plugs

Twist Locking Plugs, 3 Pole 4 Wire Grounding


20 Ampere, 125/250 Volts



WS-129
NEMA L14-20P




WS-129-3
NEMA L14-20P




WS-129-5
NEMA L14-20P

20 Ampere, 3Ø 250 Volts




WS-130
NEMA L15-20P

30 Ampere, 125/250 Volts




WS-122
NEMA L14-30P



WS-122-5
NEMA L14-30P


30 Ampere, 3Ø 250 Volts



WS-131
NEMA L15-30P


Twist Locking Plugs, 4 Pole 5 Wire Grounding

20 Ampere, 3ØY 208/250 Volts



WS-234
NEMA L21-20P


30 Ampere, 3ØY 120/208 Volts




WS-225
NEMA L21-30P

Customer exclusive

1.85



WS-223
NEMA L22-20P



















WS-224
NEMA L22-30P






Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-129 NEMA L14-20P	(SJT, SJTW, SJTO, SJO, SJ) 14AWG (SJT, SJTW, SJTO, SJO, SJ) 12AWG (SJT, SJTW, SJTO, SJO, SJ) 10AWG	18A/20A 250V	 c 
WS-129-3 WS-129-5 NEMA L14-20P	(SJT, SJTW, SJTO, SJO, SJ) 14AWG (SJT, SJTW, SJTO, SJO, SJ) 12AWG (SJT, SJTW, SJTO, SJO, SJ) 10AWG	18A/20A 250V	*
WS-130 NEMA L15-20P	(SJT, SJTW, SJTO, SJO, SJ) 14AWG*4C (SJT, SJTW, SJTO, SJO, SJ) 12AWG*4C (SJT, SJTW, SJTO, SJO, SJ) 10AWG*4C (SJT, SJTW, SJTO, SJO, SJ, STW, SJTOW) 16AWG*4C (STW, SJTOW) 14AWG*4C	18A/20A 250V	 c 
WS-122 NEMA L14-30P	(SJT, SJTW, SJTO, SJO, SJ) 14AWG*4C (SJT, SJTW, SJTO, SJO, SJ) 12AWG*4C (SJT, SJTW, SJTO, SJO, SJ) 10AWG*4C	18A/25A/30A 250V	 c 
WS-131 NEMA L15-30P	(SJT, SJTW, SJTO, SJO, SJ) 14AWG*4C (SJT, SJTW, SJTO, SJO, SJ) 12AWG*4C (SJT, SJTW, SJTO, SJO, SJ) 10AWG*4C	18A/25A/30A 250V	 c 
WS-234 NEMA L21-20P	(ST, STW, STOW, SJ, SJT, SJTW, SJTOW) 12AWG 5C (ST, STW, STOW, SJ, SJT, SJTW, SJTOW) 10AWG 5C	20A 3ØY 208/250V	 c 
WS-225 NEMA L21-30P	SJT, SJTW, SJTO, SJTOO, SJTOW, SJTOOW, ST, STW, ST O, STOO, STOW, STOOO, S, SW, SO, SOO, SOW, SOOW 10AWG 5C	30A 3ØY 120/208V	 c 
WS-223 NEMA L22-20P	(ST, STW, STOW, SJ, SJT, SJTW, SJTOW) 12AWG 5C (ST, STW, STOW, SJ, SJT, SJTW, SJTOW) 10AWG 5C	20A 3Ø 277/480V	 c 
WS-224 NEMA L22-30P	SJT, SJTW, SJTO, SJTOO, SJTOW, SJTOOW, ST, STW, ST O, STOO, STOW, STOOO, S, SW, SO, SOO, SOW, SOOW 10AWG 5C	30A 3Ø 277/480V	 c 





Molded Plugs

V. Range, Dryer and Welding Machine Major appliance Plug


Major appliance Plug for Range, Dryer and Welding Machine

15AMP, 2 Pole, 3 Wire Grounding


2 Pole, 3 Wire Grounding, Elbow Plugs
15 Ampere, 277 Volts AC



NEMA 7-15P



WS-001W NEMA 7-15P




WS-001W-1 NEMA 7-15P

20AMP, 2 Pole, 3 Wire Grounding


2 Pole, 3 Wire Grounding, Elbow Plugs
20 Ampere, 277 Volts AC




NEMA 7-20P



WS-001X NEMA 7-20P



WS-001X-1 NEMA 7-20P




WS-001X-2 NEMA 7-20P

20AMP, 3 Pole, 4 Wire Grounding

3 Pole, 4 Wire Grounding, Straight Plug
20 Ampere, 125/250 Volts



NEMA 14-20P



WS-001-3 NEMA 14-20P













1.87






Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-001W NEMA 7-15P	(SJT SVT SVT SH SPT-1 SPT-2 HPN) 18AWG*3C (SJT SPT-2 HPN) 16AWG*3C SJT 14AWG*3C SJT 12AWG*3C	10A/13A/15A 277V AC	 c 
WS-001W-1 NEMA 7-15P	(SJT SVT SVT SH SPT-1 SPT-2 HPN) 18AWG*3C (SJT SPT-2 HPN) 16AWG*3C SJT 14AWG*3C SJT 12AWG*3C	10A/13A/15A 277V AC	 c 
WS-001X NEMA 7-20P	(SJT SJTW SJTO SJTOW SJ SJO SJOW ST) 14AWG*3C (SJT SJTW SJTO SJTOW SJ SJO SJOW) 12AWG*3C	18A/20A 277V AC	 c 
WS-001X-1 NEMA 7-20P	(SJT SJTW SJTO SJTOW SJ SJO SJOW ST) 14AWG*3C (SJT SJTW SJTO SJTOW SJ SJO SJOW) 12AWG*3C	18A/20A 277V AC	 c 
WS-001X-2 NEMA 7-20P	(SJT SJTW SJTO SJTOW SJ SJO SJOW ST) 14AWG*3C (SJT SJTW SJTO SJTOW SJ SJO SJOW) 12AWG*3C	18A/20A 277V AC	 c 
WS-001-3 NEMA 14-20P	SJTOW,SJTW,SJOW 12AWG*3C SJTOW,SJTW,SJOW 14AWG*3C	18A,20A 125/250V	 c 

* Under Application for Approval






Molded Plugs


30AMP, 2 Pole, 3 Wire Grounding, Elbow Plug

125 Volts




WS-0010 NEMA 5-30P

250 Volts



WS-001Q NEMA 6-30P


277 Volts AC



WS-001R NEMA 7-30P


50AMP, 2 Pole, 3 Wire Grounding, Elbow Plug

125 Volts




WS-001L NEMA 5-50P

250 Volts



WS-001N NEMA 6-50P


277 Volts AC



WS-001S NEMA 7-50P


30AMP, 3 Pole, 3 Wire Non-Grounding, Elbow Plug

125/250 Volts




WS-001J NEMA 10-30P

125/250 Volts




WS-001J-O NEMA 10-30P

3Ø 250 Volts




WS-001T NEMA 11-30P




WS-001J-7 NEMA 10-30P

50AMP, 3 Pole, 3 Wire Non-Grounding, Elbow Plug


125/250 Volts



WS-001J-1 NEMA 10-50P




WS-001J1-2 (Small body)
NEMA 10-50P



WS-001J1-1 (Economic Body)
NEMA 10-50P

3Ø 250 Volts



WS-001U NEMA 11-50P

























1.89





Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-0010 NEMA 5-30P	SPT-3,ST,STW,STOW, SJTOW 10AWG*3C SRDT 8AWG*2C+10AWG*1C	30A 125V	 c 
WS-001Q NEMA 6-30P	SPT-3,ST,STW,STOW 10AWG*3C SJTOW, SOOW 10AWG*3C SRDT 8AWG*2C+10AWG*1C	30A 250V	 c 
WS-001R NEMA 7-30P	SPT-3,ST,STW,STOW,SJTOW, SRDT 10AWG*3C	30A 277V AC	 c 
WS-001L NEMA 5-50P	SPT-3,ST,STW,STOW, SJTOW 10AWG*3C SRDT 8AWG*2C+10AWG*1C	40A 125V	 c 
WS-001N NEMA 6-50P	SPT-3,ST,STW,STOW, SJTOW 10AWG*3C SRDT 8AWG*2C+10AWG*1C	50A 250V	 c 
WS-001S NEMA 7-50P	SPT-3,ST,STW,STOW, SJTOW 10AWG*3C SRDT 8AWG*2C+10AWG*1C	30A, 40A 277V AC	 c 
WS-001J NEMA 10-30P	SPT-3,ST,STW,STOW,SJTOW, SRDT 10AWG*3C	30A 125/250V	 c 
WS-001J-0 NEMA 10-30P	SPT-3,ST,STW,STOW 10AWG*3C SJTOW, SOOW 10AWG*3C SRDT 8AWG*2C+10AWG*1C	30A 125/250V	*
WS-001J-7 NEMA 10-30P	SPT-3, SJTOW, ST, SRDT (Flat) 10AWG*3C	30A 125/250V	 c 
WS-001T NEMA 11-30P	SPT-3,ST,STW,STOW,SJTOW, SRDT 10AWG*3C	30A 3Ø 250V	 c 
WS-001J-1 NEMA 10-50P	SPT-3,ST,STW,STOW, SJTOW 10AWG*3C; SRDT 8AWG*2C+10AWG*1C SRDT 6AWG*2C+8AWG*1C	40A, 50A 125/250V	 c 
WS-001J-2 NEMA 10-50P	SPT-3 10AWG*3C SJTOW, ST 8AWG*2C+10AWG*1C SRDT 6AWG*2C+8AWG*1C	30A, 40A, 50A 125/250V	 c 
WS-001U NEMA 11-50P	SPT-3,ST,STW,STOW, SJTOW 10AWG*3C SRDT 8AWG*2C+10AWG*1C	30A 3Ø 250V	 c 

* Under Application for Approval






Molded Plugs

30AMP, 3 Pole, 4 Wire Grounding


Elbow Plug
30 Ampere, 125/250 Volts




NEMA 14-30P




WS-001P




WS-001P-1



WS-001P-1A
Small SR



WS-001P-3
Cutdown




WS-001P-7

50AMP, 3 Pole, 4 Wire Grounding


Elbow Plug
50 Ampere, 125/250 Volts




NEMA 14-50P




WS-001K




WS-001K-1
Cable: OD ø27.5mm




WS-001K-2




WS-001K-3
Cutdown



WS-001K-9
Ultrasonic welding assembly




WS-001K-7



WS-001K-4
With 2 Leds & handle

Customer exclusive



WS-001K-5
With 2 Leds & stronger handle



Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-001P	ST,STW,STOW,SJTOW,SRDT 10AWG*4C	30A 125/250V	 c 
WS-001P-1	ST,STW,STOW,SJTOW,SRDT 10AWG*4C	30A 125/250V	 c 
WS-001P-3	ST,STW,STOW,SJTOW,SRDT 10AWG*4C	30A 125/250V	*
WS-001P-7	SJTOW, ST, STW, STOW,SRDT (Round), DRT (Round) 10AWG*4C	30A 125/250V	 c 
WS-001K WS-001K-1 WS-001K-2	ST,STW,STOW,SJTOW, SRDT 10AWG*4C STW,STOW,STOOW,SOW,SOOW, 8AWG*2C+10AWG*2C, 6AWG*2C+8AWG*2C, 6AWG*4C STW,STOW,STOOW 6AWG*3C+8AWG*1C	30A,40A,50A 125/250V	 c 
WS-001K-3	ST,STW,STOW,SJTOW 10AWG*4C SRDT 8AWG*2C+10AWG*2C SRDT 6AWG*2C+8AWG*2C	40A,50A 125/250V	*
WS-001K-4	(STW, STOW, STOOW)10/4 (STW, STOW, STOOW)6/3+8/1 (STW, STOW, STOOW, SOW, SOOW)6/4	30A,50A 125/250V	*
WS-001K-5	(STW, STOW, STOOW)10/4 (STW, STOW, STOOW)6/3+8/1 (STW, STOW, STOOW, SOW, SOOW)6/4	30A,50A 125/250V	 c 
WS-001K-7	ST, STW, STOW, STOOW, SJTOW 10/4 ; SRDT 8/2+10/2, 6/2+8/2 ; DRT 8/2+10/2, 6/2+8/2	40A,50A,30A, 125/250V	
WS-001K-9	SRDT 8/2+10/2	50A 125/250V	*


* Under Application for Approval




Molded Plugs

W . RV AC Plug


NEMA TT-30P, 2 Pole, 3 Wire Grounding
Elbow Plug, 30 Ampere, 120 Volts AC




WS-001J-2
Customer exclusive



WS-001J-3
With handle




WS-001J-4
With LED & handle
Customer exclusive




WS-001J-5
With LED & stronger handle


NEMA 14-50P, 3 Pole, 4 Wire Grounding
Elbow Plug, 50 Ampere, 125/250 Volts




WS-001K




WS-001K-1
Cable: OD ø27.5mm




WS-001K-2



WS-001K-3
Cutdown











WS-001K-4
With 2 Leds & handle
Customer exclusive



WS-001K-5
With 2 Leds & stronger handle

Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-001J-2 TT-30P	STW,STOW,STOOW 10AWG*3C	30A 125V	 c 
WS-001J-3 TT-30P WS-001J-4 TT-30P	(STW, STOW, STOOW, SOW, SOOW)10/3	30A 125V	*
WS-001J-5 TT-30P	(STW, STOW, STOOW, SOW, SOOW)10/3	30A 125V	 c 
WS-001K WS-001K-1 WS-001K-2	STW,STOW,STOOW,SOW,SOOW 6AWG*4C STW,STOW,STOOW 6AWG*3C+8AWG*1C	40A,50A 125/250V	 c 
WS-001K-3	STW,STOW,STOOW 6AWG*3C+8AWG*1C STW,STOW,SOW,SOOW 6AWG*3C	40A,50A 125/250V	*
WS-001K-4	10/4 STW, STOW, STOOW; 6/3+8/1 STW, STOW, STOOW; 6/4 STW, STOW, STOOW, SOW, SOOW	30A,50A 125/250V	*
WS-001K-5	10/4 STW, STOW, STOOW; 6/3+8/1 STW, STOW, STOOW; 6/4 STW, STOW, STOOW, SOW, SOOW	30A,50A 125/250V	 c 

* Under Application for Approval






Molded Plugs

X . Marine shore Plugs


Twist Locking Waterproof Plugs, For Marine and Shore use.

15 AMP, 2 Pole 3 Wire Grounding


15 Ampere, 125 Volts, 250 Volts and 277 Volts AC



WS-118-2 NEMA L5-15P




WS-123-2 NEMA L6-15P




WS-226-2 NEMA L7-15P

20 AMP, 2 Pole 3 Wire Grounding

20 Ampere, 125 Volts and 250 Volts




WS-117-2 NEMA L5-20P




WS-119-2 NEMA L6-20P

30 AMP, 2 Pole 3 Wire Grounding


30 Ampere, 125 Volts



WS-121-2
NEMA L5-30P




WS-121-2-1
NEMA L5-30P



WS-121-3
NEMA L5-30P
LED option


30 Ampere, 250 Volts




WS-120-2 NEMA L6-30P

20 AMP, 3 Pole 4 Wire Grounding

20 Ampere, 3Ø 250 Volts




WS-129-2 NEMA L14-20P




WS-130-2 NEMA L15-20P

30 AMP, 3 Pole 4 Wire Grounding

30 Ampere, 125/250 Volts and 3Ø 250 Volts



WS-122-2 NEMA L14-30P



WS-131-2 NEMA L15-30P

1.95






Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-118-2 NEMA L5-15P WS-123-2 NEMA L6-15P WS-226-2 NEMA L7-15P	(SOW,SOOW,STW,STOW,STOOW) 14AWG*3C (SEW,SEOW,SE0OW,ST) 12AWG*3C (SJOOW,SJTW,SJTOOW,SJEW) 10AWG*3C	15A 125V	*
WS-117-2 NEMA L5-20P WS-119-2 NEMA L6-20P	SJTW,SJTOW,SJTOOW,STW,STOW,STOOW,SJW,SJOW,SJOOW,SW,SOW,SOOW,SEW,SEOW,SE0OW 12,10AWG*3C	20,20A/125V	UL c UL
WS-121-2 NEMA L5-30P WS-120-2 NEMA L6-30P	SJTW,SJTOW,SJTOOW,STW,STOW,STOOW,SJW,SJOW,SJOOW,SW,SOW,SOOW,SEW,SEOW,SE0OW 12,10AWG*3C	20,30A/125V	UL c UL
WS-121-3 NEMA L5-30P	(STW,STOW,STOOW,SW) 10AWG*3C (SOW,SOOW,SEW,SEOW,SE0OW) 10AWG*3C	30A 125V	UL c UL
WS-129-2 NEMA L14-20P	SJTW,SJTOW,SJTOOW,STW,STOW,STOOW,SJW,SJOW,SJOOW,SW,SOW,SOOW,SEW,SEOW,SE0OW 12,10AWG*3C	20,20A/250V	UL c UL
WS-130-2 NEMA L15-20P	SJTW,SJTOW,SJTOOW,STW,STOW,STOOW,SJW,SJOW,SJOOW,SW,SOW,SOOW,SEW,SEOW,SE0OW 12,10AWG*3C	20,20A/250V	UL c UL
WS-122-2 NEMA L14-30P	SJTW,SJTOW,SJTOOW,STW,STOW,STOOW,SJW,SJOW,SJOOW,SW,SOW,SOOW,SEW,SEOW,SE0OW 12,10AWG*3C	20,30A/250V	UL c UL
WS-131-2 NEMA L15-30P	SJTW,SJTOW,SJTOOW,STW,STOW,STOOW,SJW,SJOW,SJOOW,SW,SOW,SOOW,SEW,SEOW,SE0OW 12,10AWG*3C	20,30A/250V	UL c UL

* Under Application for Approval

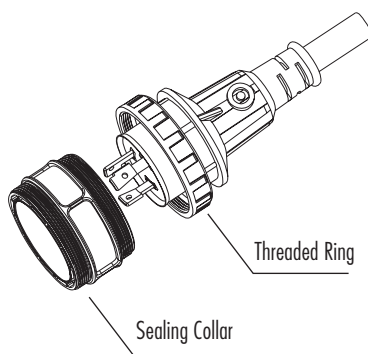




Molded Plugs

20 AMP, 4 Pole 5 Wire Grounding


20 Ampere, 3ØY 120/208 Volts




WS-234-2 NEMA L21-20P

50 AMP, 2 Pole 3 Wire Grounding


50 Ampere, 125 Volts



WS-266-3 NEMA SS1-50P




Threaded Ring





WS-266-4 NEMA SS1-50P

50 AMP, 3 Pole 4 Wire Grounding

50 Ampere, 125/250 Volts




WS-265-3 NEMA SS2-50P




WS-265-4 NEMA SS2-50P

50 Ampere, 250 Volts.



WS-267-3



WS-267-3-1

1.97





Molded Plugs

Information

Model No.	Applicable Cable	Rating	Approval
WS-234-2 NEMA L21-20P	(SOW,S0OW,STW,STOW,STOOW) 14AWG*5C (SEW,SEOW,SE0OW,ST) 12AWG*5C (SJ0OW,SJTW,SJTOOW,SJEW) 10AWG*5C	20A 3øY 120/208V	*
WS-266-3 NEMA SS1-50P	6 AWG/3 ST,STW,STOOW,SOW,S0OW	50A 125V	*
WS-265-3 NEMA SS2-50P	6 AWG/4 ST,STW,STOOW,SOW,S0OW	50A 125/250V	*
WS-267-3	6 AWG/4 ST,STW,STOOW,SOW,S0OW	50A 250V	*

* Under Application for Approval



International Plug Type List Which plug do you need?

We often get many inquiry about which type plug is suitable for

We can understand that, it's really hard and confused for you. Thus we list all we know and hope it's helpful and useful for you.




















































































Country	Part No.	Rating (MHz/Volt)	Country	Part No.	Rating (MHz/Volt)
Algeria	WS-010	50/127.220	Ecuador	WS-001	60/110.120
Argentina	WS-009F WS-015F	50/220.240	Egypt	WS-017 WS-020	50/220
Australia	WS-015	50/240	EL Salvador	WS-001	60/110
Austria	WS-010	50/220	England	WS-012	50/240
Bahamas	WS-001	60/120	Finland	WS-010	50/110
Belgium	WS-010	50/220	Germany	WS-010	50/110.220
Bolivia	WS-001	50/110	Greece	WS-010 WS-020	50/220
Brazil	WS-001F	60/110	Guam	WS-001	60/110
Bulgaria	WS-010	50/220	Guatemala	WS-001	60/110
Canada	WS-004 WS-001	60/120	Haiti	WS-001	60/115
Central African	WS-016	50/220	Honduras	WS-001	60/120
Chile	WS-013	50/220	Hong Kong	WS-012	50/220
China	WS-004B WS-015D	50/220	Hungary	WS-010	40,50/220
Colombia	WS-001	60/115	India	WS-016 WS-018	50/230
Costa Rica	WS-001	60/110	Indonesia	WS-010	50/220
Cuba	WS-001	60/120	Iran	WS-006	50/220
Czech Republic	WS-010	50/110.220	Israel	WS-020	50/230
Denmark	WS-008 WS-010	50/220	Italy	WS-013	50/110.220
Dominican Rep.	WS-001	60/115	Jamaica	WS-006	50.60/220
Dubai	WS-010	50/220	Japan	WS-005 WS-001	50.60/110

Country	Part No.	Rating (MHz/Volt)
Jordan	WS-006	50/220
Kenya	WS-006	50/230
Korea	WS-010	60/220
Lebanon	WS-006	50/110
Luxembourg	WS-010	50/220
Malaysia	WS-012	50/230.240
Mexico	WS-001	60/120
Monaco	WS-010	50/220
Morocco	WS-006	50/110.220
Myanmar	WS-010	50/220
Netherlands	WS-010	50/220
New Zealand	WS-015	50/230
Nicaragua	WS-001	60/120
Nigeria	WS-010	50/230
Norway	WS-010	50/230
Pakistan	WS-010	50/220
Paraguay	WS-001	50/220.110
Peru	WS-001 WS-010	60/110.220
Philippines	WS-001	60/220
Poland	WS-010	50/220
Portugal	WS-010	50/220
Romania	WS-010	50/220

Country	Part No.	Rating (MHz/Volt)
Russia	WS-006 WS-010	50/110.220
Singapore	WS-012	50/115.230.240
South Africa	WS-016	50/220
Spain	WS-010	50/220
Sudan	WS-010	50/240
Sweden	WS-010	50/120.124.220
Swiss	WS-014	50/220
Syria	WS-006	50/220
Taiwan	WS-004 WS-001	60/110
Tanzania	WS-010	50/230
Thailand	WS-001	50/220
The Congo	WS-010	50/220
The Ryukyu Islands	WS-005 WS-001	60/110
Tunisia	WS-010	60/230
Turkey	WS-010 WS-006	50/110.220
Uganda	WS-012	50/230
United Arab Emirates	WS-012	50/110.220
Uruguay	WS-006	50/220
USA	WS-001 WS-004	60/110.120
Venezuela	WS-001	50.60/110
Vietnam	WS-010	50.60/120
Yugoslavia	WS-010	50.60/120

NEMA Straight Blade Configurations

NEMA CONFIGURATIONS FOR GENERAL-PURPOSE NONLOCKING PLUGS AND RECEPTACLES























































































WIRING / VOLTAGE			15 AMPERE		20 AMPERE		30 AMPERE		50 AMPERE		60 AMPERE	
			RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG
2-POLE 2-WIRE	125V	1										
	250V	2										
	277V AC	3					RESERVED FOR FUTURE CONFIGURATIONS					
	600V	4					RESERVED FOR FUTURE CONFIGURATIONS					
2-POLE 3-WIRE GROUNDING	125V	5										
	250V	6										
	277V AC	7										
	347V AC	24										
	480V AC	8					RESERVED FOR FUTURE CONFIGURATIONS					
	600V	9					RESERVED FOR FUTURE CONFIGURATIONS					
3-POLE 3-WIRE	125/250V	10										
	3Ø 250V	11										
	3Ø 480V	12					RESERVED FOR FUTURE CONFIGURATIONS					
	3Ø 600V	13					RESERVED FOR FUTURE CONFIGURATIONS					
3-POLE 4-WIRE GROUNDING	125/250V	14										
	3Ø 250V	15										
	3Ø 480V	16					RESERVED FOR FUTURE CONFIGURATIONS					
	3Ø 600V	17					RESERVED FOR FUTURE CONFIGURATIONS					
4-POLE 4-WIRE	3ØY 120/208V	18										
	3ØY 277/480V	19					RESERVED FOR FUTURE CONFIGURATIONS					
	3ØY 347/600V	20					RESERVED FOR FUTURE CONFIGURATIONS					
4-POLE 5-WIRE GROUNDING	3ØY 120/208V	21					RESERVED FOR FUTURE CONFIGURATIONS					
	3ØY 277/480V	22					RESERVED FOR FUTURE CONFIGURATIONS					
	3ØY 347/600V	23					RESERVED FOR FUTURE CONFIGURATIONS					

1.10









































NEMA Locking Configurations

NEMA CONFIGURATIONS FOR LOCKING TYPE PLUGS AND RECEPTACLES

WIRING / VOLTAGE			15 AMPERE		20 AMPERE		30 AMPERE	
			RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG
2-POLE 2-WIRE	125V	L1	L1-15R 	L1-15P 				
	250V	L2			L2-20R 	L2-20P 		
	277V AC	L3			RESERVED FOR FUTURE CONFIGURATIONS			
	600V	L4			RESERVED FOR FUTURE CONFIGURATIONS			
2-POLE 3-WIRE GROUNDING	125V	L5	L5-15R 	L5-15P 	L5-20R 	L5-20P 	L5-30R 	L5-30P 
	250V	L6	L6-15R 	L6-15P 	L6-20R 	L6-20P 	L6-30R 	L6-30P 
	277V AC	L7	L7-15R 	L7-15P 	L7-20R 	L7-20P 	L7-30R 	L7-30P 
	347V AC	L24			L24-20R 	L24-20P 		
	480V AC	L8			L8-20R 	L8-20P 	L8-30R 	L8-30P 
	600V AC	L9			L9-20R 	L9-20P 	L9-30R 	L9-30P 
3-POLE 3-WIRE	125/250V	L10			L10-20R 	L10-20P 	L10-30R 	L10-30P 
	3Ø 250V	L11	L11-15R 	L11-15P 	L11-20R 	L11-20P 	L11-30R 	L11-30P 
	3Ø 480V	L12			L12-20R 	L12-20P 	L12-30R 	L12-30P 
	3Ø 600V	L13					L13-30R 	L13-30P 
3-POLE 4-WIRE GROUNDING	125/250V	L14			L14-20R 	L14-20P 	L14-30R 	L14-30P 
	3Ø 250V	L15			L15-20R 	L15-20P 	L15-30R 	L15-30P 
	3Ø 480V	L16			L16-20R 	L16-20P 	L16-30R 	L16-30P 
	3Ø 600V	L17					L17-30R 	L17-30P 
4-POLE 4-WIRE	3ØY 120/208V	L18			L18-20R 	L18-20P 	L18-30R 	L18-30P 
	3ØY 277/480V	L19			L19-20R 	L19-20P 	L19-30R 	L19-30P 
	3ØY 347/600V	L20			L20-20R 	L20-20P 	L20-30R 	L20-30P 
4-POLE 5-WIRE GROUNDING	3ØY 120/208V	L21			L21-20R 	L21-20P 	L21-30R 	L21-30P 
	3ØY 277/480V	L22			L22-20R 	L22-20P 	L22-30R 	L22-30P 
	3ØY 347/600V	L23			L23-20R 	L23-20P 	L23-30R 	L23-30P 


International-Rated IEC 309 Devices, Pin and Sleeve Devices

AMPS	NUMBER OF CONTACTS	TYPE	VOLTAGE / COLOR	CONNECTOR / RECEPTACLE O'CLOCK	PLUG / INLET
16/32	3 contacts: 2P 3W	2P+⊕	50-250V	 3	
		1P+N+⊕ 2P+⊕	100-130V	 4	
		1P+N+⊕	277V	 5	
		2P+⊕	200-250V	 6	
		2P+⊕	480-500V	 7	
		2P+⊕	380-415V	 9	
	4 contacts: 3P 4W	3P+⊕	380-480V	 3	
		3P+⊕	100-130V	 4	
		3P+⊕	600V-690V	 5	
		3P+⊕	380V-415V	 6	
		3P+⊕	480V-500V	 7	
		3P+⊕	200V-250V	 9	
		3P+⊕	440V-460V	 11	
		2P+N+⊕	125V/250V	 12	
	5 contacts: 4P 5W	3P+N+⊕	347/600V-400/690V	 5	
		3P+N+⊕	200/346V-240/415V	 6	
		3P+N+⊕	277/480V-288/500V	 7	
		3P+N+⊕	120/208V-144/250V	 9	
		3P+N+⊕	250/440V-265/460V	 11	

1.103





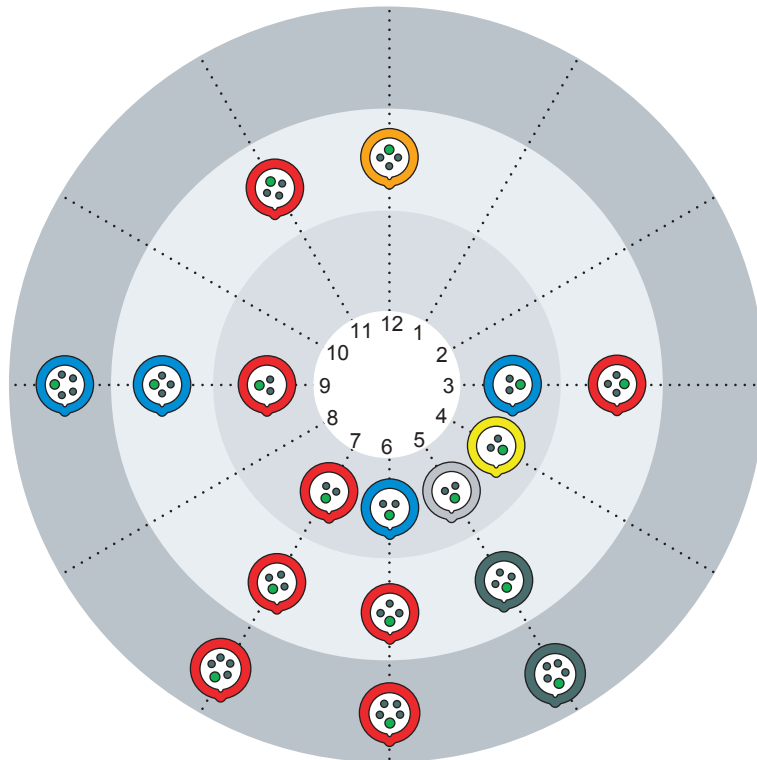




Pin and Sleeve Devices







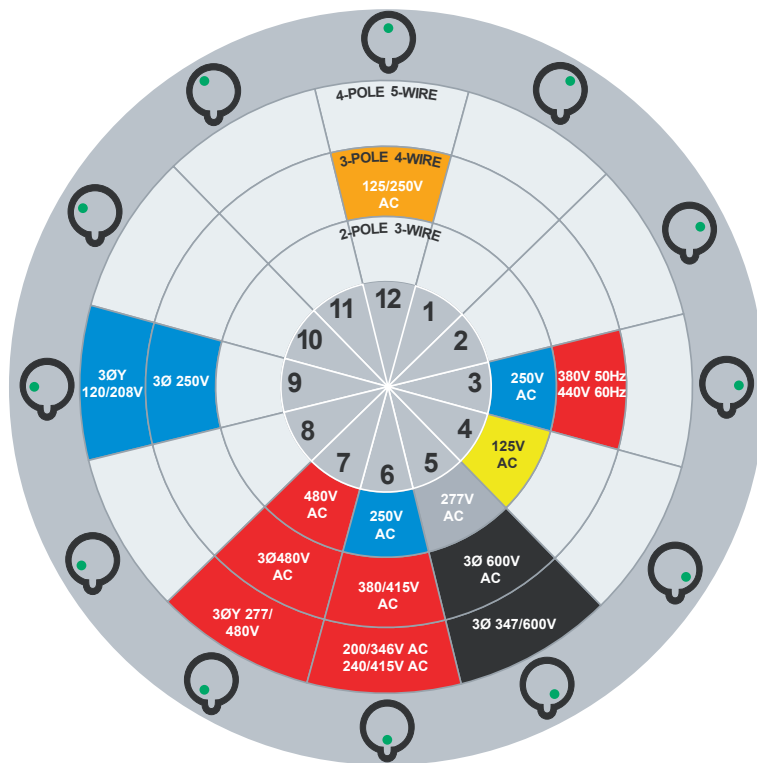

Green Dot • Represents
the Ground Sleeve of
Female Devices
(Connectors & Receptacles)

Series 309 IEC Configuration

	Yellow = 100V-130V		Orange = 125V/250V
	Blue = 200V-250V		Gray = 277V
	Red = 380V-480V		Green/Black = 500V-690V



North American

Rated Voltage	Color
110V-130V	
125V-250V	
200V-250V	
277V, 380V, 440V	
346V-480V	
500V and above	

1.104

The housing keyway is always located at the 6 o'clock position and is clearly visible to the user.

• We gained Safety Standard approval of different country



Quality Manufacturer and Green Partner
Awarded Sony Green Partner Cetification in 2005.



Well Shin Technology Co., Ltd.

Well Shin (Taiwan) Factory
Well Shin Electronics (KunShan) Co., Ltd.
Dong Guan Well Shin Electronic Products Co., Ltd.



Headquarter



Taiwan Plant



Dongguan Plant



Kun Shan Plant (Shanghai Area)

維熹科技股份有限公司

Well Shin Technology Co., Ltd.

臺北市內湖區新湖三路196號

No.196, Xinghu 3rd Rd., Neihu District,

Taipei City 114, Taiwan

TEL: 886-2-2791-1119 FAX: 886-2-2791-9901

台灣工廠

Taiwan Plant

彰化縣福興鄉麥厝村沿海路一段1號

N1, Sec.1, Yen Hai Rd., Mai Tsuo Chun,

Fu Hsing Hsiang, Chang Hwa 50645, Taiwan

Tel: 886-4-770-3081 Fax: 886-4-770-3080

東莞維升電子製品有限公司

Dongguan Well Shin Electronic Products Co., Ltd.

廣東省東莞市黃江鎮長龍管理區

Chang Long Control Dist., Hwang Jiang Cheng,

Dongguan City, Guangdong 523766, China

TEL: 86-769-8362-2694 FAX: 86-769-8362-2714

維爾斯電子(昆山)有限公司

Well Shin Electronic (Kun Shan) Co., Ltd.

江蘇省昆山市錦溪鎮昆開路389號

No.389, Kun Kai Rd., Jin Xi Town,

Kun Shan City, Jiang Su 215324, China

TEL: 86-512-5722-9101 FAX: 86-512-5722-9105