



POWER ADAPTER PLUG

INTERNATIONAL





Copyright © 2009 by Well Shin Technology Co.,Ltd. All rights reserved.
None of the information provided here may be used, duplicated, reproduced,
either partially or completely,without prior permission of Well Shin.

本公司之目錄享有法律著作權，未經授權不得摘編、拷貝、使用。

Information provided here may consist of uncertainty, Well Shin reserves the
right to revise or explain all the time.

目錄中資料可能因疏失而存在錯誤，本公司保留隨時修正或解釋的權利。

International Traveller Adapter kit

0.2A Shaver Adapter Kit.....	4.1
2-prong Laptop Adapter Kit	4.2
2.5A 3-prong Laptop Adapter Kit	4.7
10A 3-prong Adapter Kit.....	4.10
16A 3-prong Adapter Kit.....	4.12
Europe 2-prong Outlet Traveller Adapter Kit	4.13
Australia Outlet Traveller Adapter Kit.....	4.14
Parallel flat Prongs Outlet Traveller Adapter Kit	4.15
IEC Outlet Adapter Plug.....	4.20



Multifunctional Adapter Plug

Computer Surge Protect Adapter Plug.....	4.22
2-pin, 3 outlet	4.23
Power Tap.....	4.23
3-pin, 2/3 outlet.....	4.24
Smart Countrol Adapter series (rotating outlet).....	4.25
Telecontrol Adapter	4.25
USA Plug In Adapter.....	4.26
Male end-Straight Blade to Female end-Twist Locking	4.26
Male end-Straight Blade to Female end-Straight Blade	4.27
Male end-Twist Locking to Female end-Straight Blade	4.27
Male end-Twist Locking to Female end-Twist Locking	4.28
RV Adapter Plug.....	4.32
Female end-RV to Male end-Straight Blade	4.32
Female end-Straight Blade to male end-RV.....	4.32
Male end-Twist Locking to Female end-RV.....	4.33
Europe Outlet Adapter Plug.....	4.34
Multilateral Outlet Adapter Plug.....	4.35
Airplane and Automobile Adapter Plug	4.36
Dell Adapter Plug.....	4.37
Apple Adapter Plug.....	4.37
OEM Adapter Plugs	4.38
Technical Information.....	4.41


0.2A Shaver Adapter Kit

PATENTED

IEC 320 C1 Outlet.




PATENTED




WS-086-1 UK





WS-088-1 Europe



WS-067-1




WS-087-1 USA

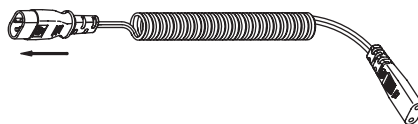


IEC 320 C1 Outlet Plug in your shaver directly.




PATENTED




WS-063
USA



WS-064
Australia (L)




WS-065
Europe




WS-064-1
Australia (L)
upturned




WS-064-2
Australia (L)
adown




WS-070A
USA




WS-070B
USA




WS-085-1
Denmark




WS-086-1
UK



WS-209-1
South Africa



WS-210-1
Israel



Model No.

Rating

Approval

WS-086-1

0.2A 250V




WS-064-1

0.2A 250V




2-prong Laptop Adapter Kit


90 degree angle, IEC 320 C7 plug in your power directly. 




WS-066
Australia




WS-066A
Argentina




WS-068
Europe




WS-069
USA/Japan




WS-069A
USA/Japan




WS-070
USA




WS-085
Denmark






WS-210
Israel




WS-258
South Africa (S)




WS-209
South Africa (L)

Model No.	Rating	Approval
WS-066	2.5A 250V	
WS-069, WS-070	7A, 125V	
WS-068	2.5A 250V	


Ultrasonic Welding Assembly




WS-069-J
Japan/USA




WS-068-A
Europe



WS-069-J1
China




WS-066-J
Argentina




WS-066-J1
Australia



WS-066-L Australia
90° Rotary pin




WS-086-6
UK

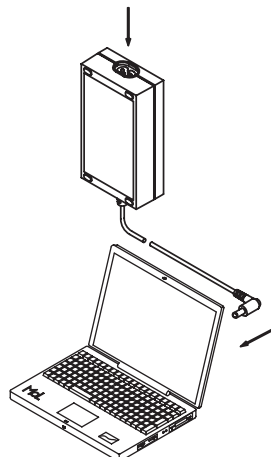

International Traveller kit


With cable, IEC 320 C7 Outlet.




WS-080-3
Airplane




WS-080-4 (APC)
Automobile




WS-086
UK (Upturn)



WS-087
USA/Japan




WS-088-2
Netherlands

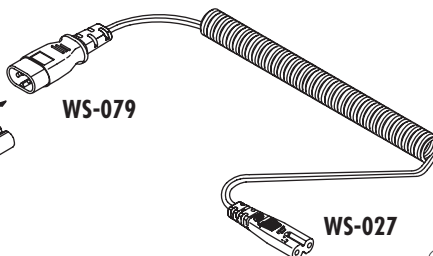


WS-079


WS-027



WS-086-2
UK (adown)



WS-088
Europe




WS-067
Australia




WS-087-3
USA/Japan, with Easy Pull

PATENTED


Ultrasonic Welding Assembly




WS-067-A (Argentina)




WS-067-B (Australia)




WS-088-4 (Europe 2pin)



WS-087-B (Japan/USA)



WS-086-6 (UK)



WS-208 (Europe 3pin)


Model No.	Rating	Approval
WS-086	250V, 50Hz, 2.5A, ClassII, Standard Sheet C7 type outlet	ASA
WS-086-2	250V, 50Hz, 2.5A, ClassII, Standard Sheet C7 type outlet	ASA
WS-087	7A, 125V	UL
	2.5A 125V	UL



2.5A 2-prong DV Adapter Kit


Project A.

Elbow, In-case, IEC 320 C7 Outlet

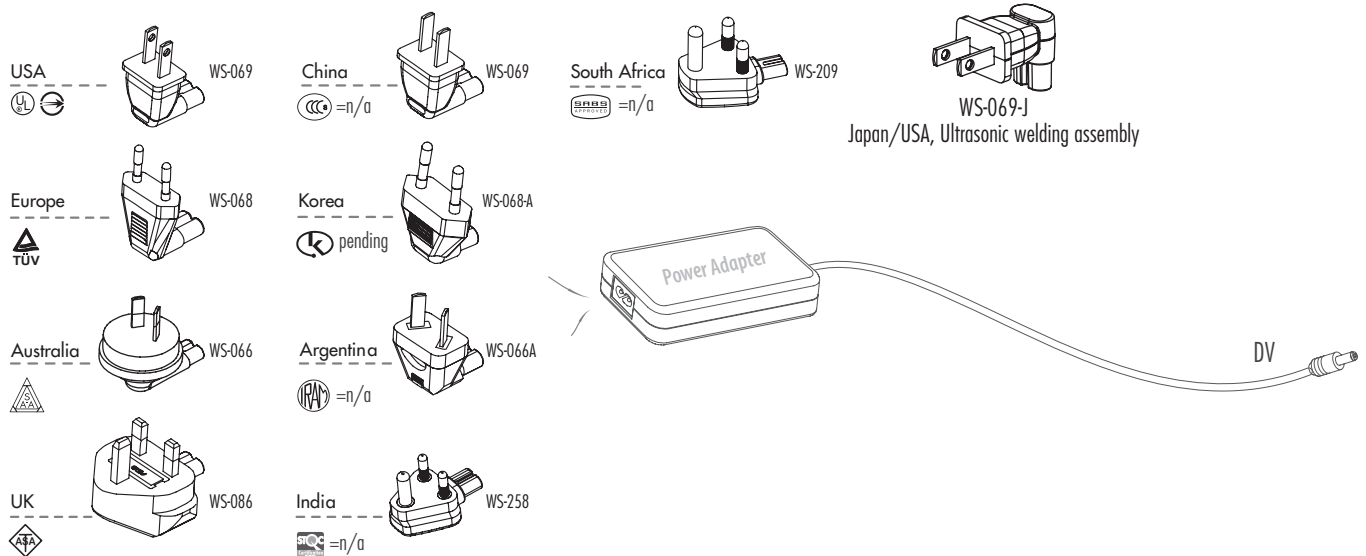

Project B.

Straight, In-cable, IEC 320 C7 Outlet

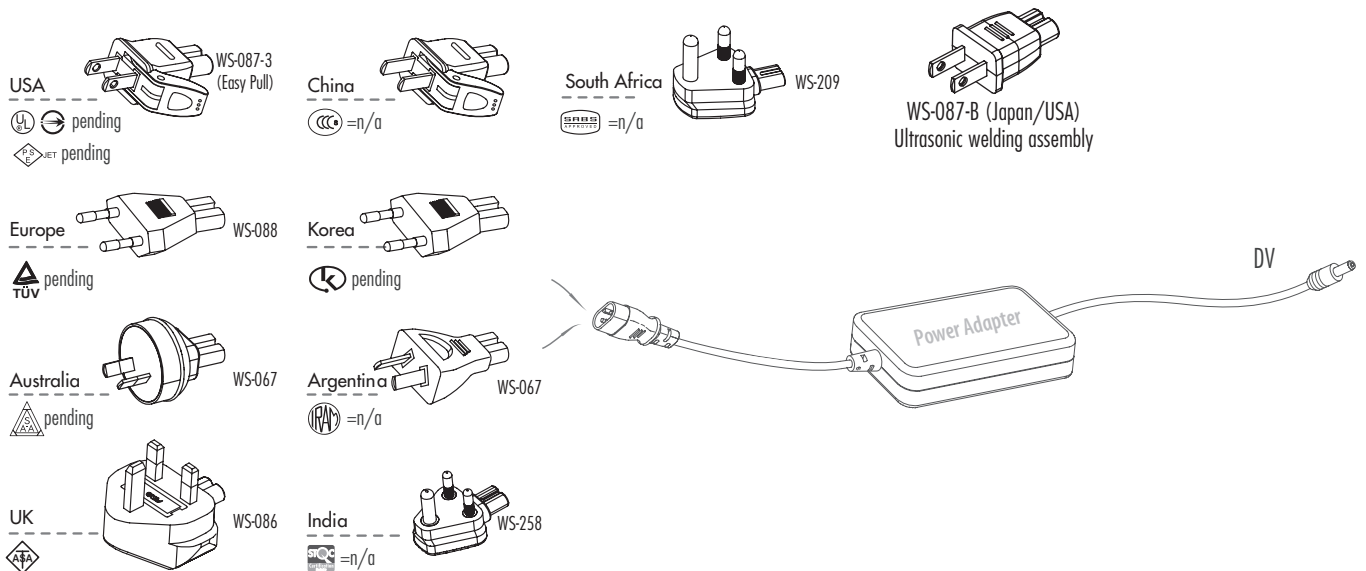

In the world, You can easy-travel around the world with only 4.


- Parallel flat Prongs from in USA / Canada / Japan / Taiwan / Thai
- Angled flat Prongs from in Australia / New Zealand / China / NZ
- Squared Prongs from in UK / Singapore / Hong Kong
- Round Prongs from Europe / S.Africa / India / MidEast / Israel / Italy / Switzerland / Korea




2.5A light duty power adapter kit

IEC 320 C7 Outlet


Ultrasonic Weld Assembly




WS-068-L
(Europe)




WS-068-M
(Korea)




WS-068-N
(Brazil)




WS-068-P
(India)




WS-069-M
(USA)




WS-069-L
(China)



WS-066-G
(Australia)




WS-066-H
(Argentina)



WS-086-8
(UK)


Minitype



WS-069-N
USA, minitype




WS-069-P
Japan, minitype
Pin with Insulation




WS-069-R
China, Minitype


AC Adapter Customization.




WS-069-H
US




WS-068-H
EU




WS-086-7
UK




WS-068-G
(Brazil)




WS-069-T
US




WS-259
EU




WS-086-12
UK




WS-066-P
AU




WS-069-K
US



WS-068-J
EU



WS-086-9
UK



WS-066-K
AU

Customer exclusive

Customer exclusive

Customer exclusive

Customer exclusive

4.5

Model No.

Rating

Approval



WS-069-K

2.5A, 125V






International Traveller Kit

2.5A light duty power adapter kit PATENTED



Rotatable Pin

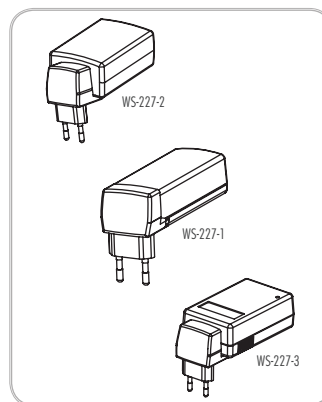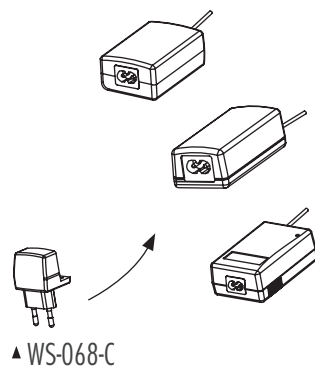


Model No.	Rating	Approval
WS-069-F	2.5A, 125V	
WS-069-F1, WS-069-F2	2.5A, 125V	
WS-069-F3	1-3A 125V	
WS-068-C	2.5A 250V	




2.5A 3-prong Laptop Adapter Kit




IEC 320 C5 Outlet. Plug in your power directly




WS-046-4
USA



WS-047-B
Europe




WS-048-B
UK




WS-049-B
Australia

Model No.	Rating	Approval
WS-046-4	2.5A 125V	UL cUL
WS-048-B	250V, 50Hz, 2.5A, Class I, Standard Sheet C5 type outlet	ASA
WS-049-B WS-092B	2.5A 250V	SAVA
WS-091-B	250V, 50Hz, 2.5A, Class I, Standard Sheet C5 type outlet	ASA


Ultrasonic Welding Assembly




WS-046-A
USA




WS-049-G
China




WS-039-A
Japan (Exposed grounding line)



WS-039-B
USA, Japan, Taiwan




WS-039-B1
China




With cable, IEC 320 C5 Outlet


Molding




WS-094-B
USA





WS-091-B
UK




WS-092-B
Australia




WS-095-B
Europe

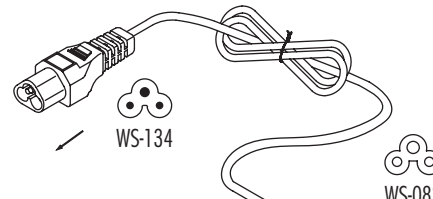

WS-099-B
Italy



WS-098-B
Israel



WS-093-B
Swiss




WS-096-B
Denmark




WS-097-B
South Africa (L)


Ultrasonic Welding Assembly




WS-094-C
USA




WS-091-C
UK



WS-095C
Europe




WS-092-C
Australia



WS-100-B
Europe

Model No.	Rating	Approval
WS-094-C	10A, 125V	UL cUL
WS-091C	250V, 50Hz, 2.5A, Class I, Standard Sheet C5 type outlet	ASA *
WS-095C	2.5A 250V	TUV
WS-092C	2.5A 250V	SAVA *



WS-099-C
Italy




WS-093-C
Swiss

International Traveller Kit



2.5A light duty power adapter kit PATENTED
90 degree angle, IEC 320 C5 plug in your power directly.



Molding

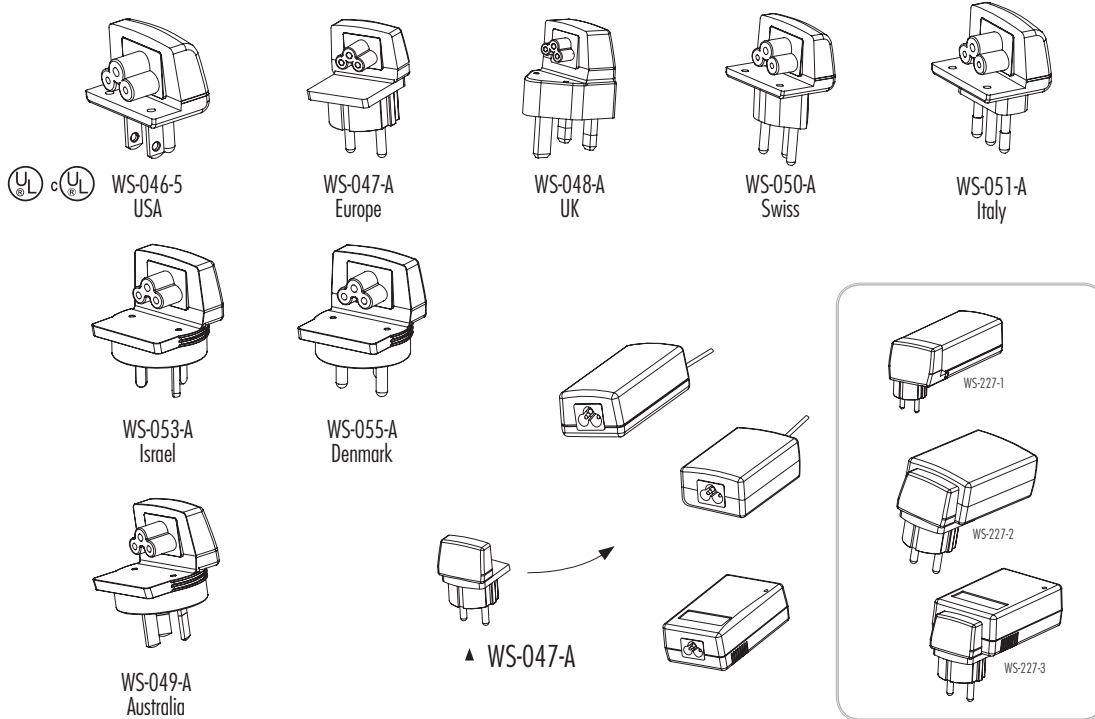

Ultrasonic Welding Assembly

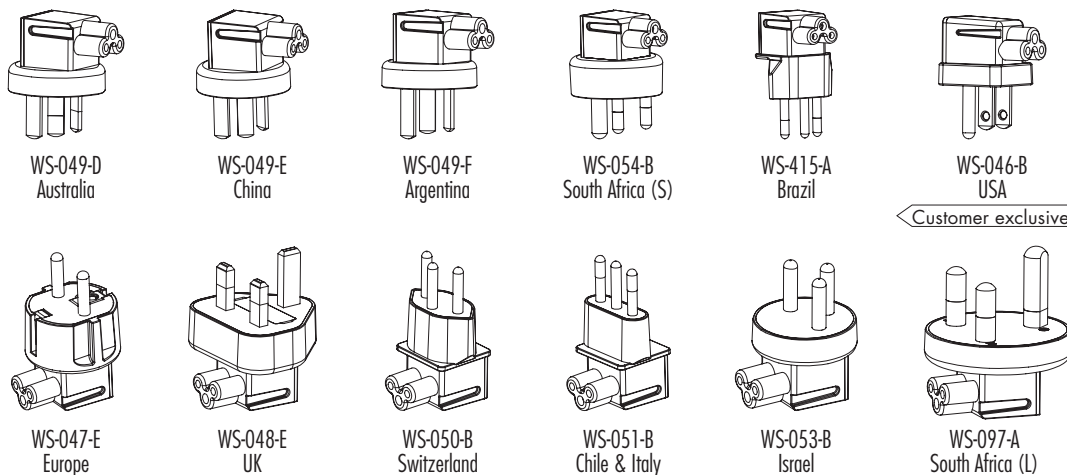


Model No.	Rating	Approval
WS-046-B	2.5A 125V	


4.8




International Traveller kit




WS-066-M
(AU)




WS-066-N
(AR)




WS-068-R
(EU)




WS-068-S
(KO)



WS-069-S
(US)



WS-069-S-1
(CCC)




WS-086-11
(UK)


10A 3-prong Adapter Kit

Elbow Adapter, IEC 320 C13 Outlet


Molding




WS-046-1
USA




WS-049
Australia




WS-049-1
China




WS-054
South Africa (S)




WS-046-2
USA




WS-050
Swiss




WS-055
Denmark





WS-046-3
USA




WS-051
Italy




WS-071
Japan

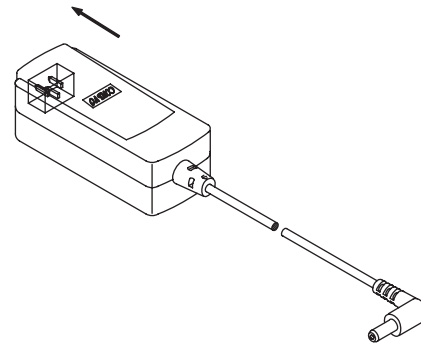


WS-047
Europe




WS-047-1
Europe (lengthen edition)




WS-052
Greece




WS-072
Japan




WS-415
Brazil




WS-048
UK



WS-053
Israel



WS-100-A
Europe



WS-047-D
Europe

Model No.	Rating	Approval
WS-047	10A 250V	
WS-048, WS-049	10A 250V	
WS-046-1, WS-046-2, WS-046-3	10A, 125V	
	10A, 125V	




Straight Adapter, IEC 320 C13 Outlet




待设计 Locking 功能新款式 20110212


Molding, With locking function




WS-091
UK




WS-092
Australia




WS-094
USA




WS-095
Europe




WS-093
Swiss




WS-096
Denmark




WS-097
South Africa





WS-098
Israel



WS-099
Italy




WS-
Europe

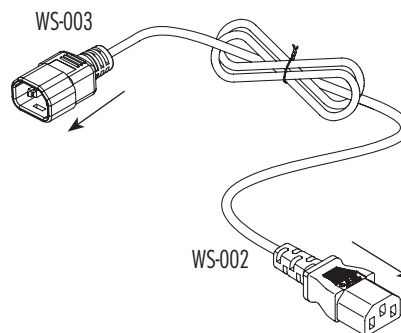


Press the button to unlock


Ultrasonic Welding Assembly




WS-095-A
Europe




WS-091-A
UK




WS-092-A
Australia



WS-100
Europe



WS-099-A
Italy




WS-093-A
Swiss


Model No.	Rating	Approval
WS-092	10A 250V	
WS-094	10A 125V	

16A 3-prong Adapter Kit


IEC 320 C19 Outlet




WS-135
USA




WS-140
UK




WS-139
Europe




WS-142
Australia




WS-136
USA (6-20P)




WS-141
China (6/10A)




WS-146
Greece 16A 250V




WS-137
USA (5-20P)




WS-143
China (16A)




WS-145
Swiss




WS-138
USA (6-15P)



WS-144
Italy




WS-148
Denmark

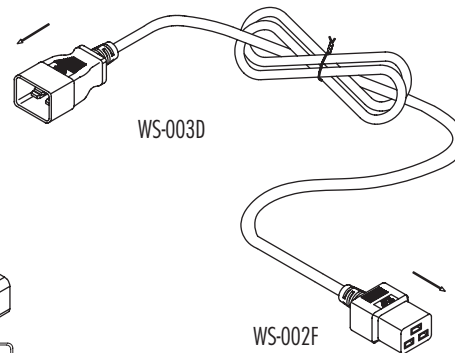

WS-003D

WS-002F



WS-397
3P to C19, with chassis lock and magnet

Customer exclusive

Information

Model No.	Rating	Approval
WS-140	250V, 50Hz, 13A, Class I, Standard Sheet C19 type outlet	
WS-142	15A 250V	

* Under Application for Approval




Europe 2-prong Outlet Traveller Adapter Kit

In-cable




WS-040
Australia to Eur.
Shutter protection




WS-101
South Africa to Eur.
(Elbow)




WS-101-1
South Africa (L) to Eur.
Shutter protection




WS-102
UK to Eur.
(Elbow)




WS-102-1
UK to Eur., Molded,
Shutter protection




WS-102-2
UK to Eur., Assembly,
Shutter protection



WS-036-2
USA (1-15P) to Eur., molded,
Shutter protection




WS-036-4
USA (1-15P) to Europe,
molded




WS-036-3
USA (2-15P),molded


Ultrasonic Welding Assembly




WS-036-A
USA (1-15P) to Eur., Assembly,
Shutter protection




WS-036-5
USA (1-15P) to Eur., Assembly,
Shutter protection



WS-152-F
UK



WS-115
AUS to EU, US

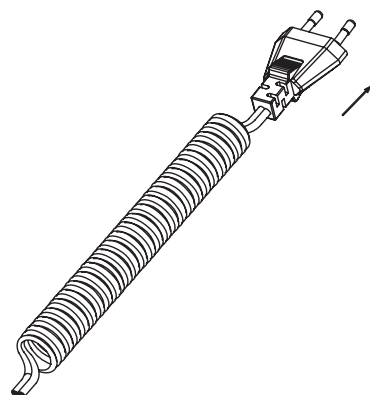

Shutter Protection Design




Shutter


- **Remark:** Variety of specification is available for other countries or region. Please refer to the engineering drawing for the detailed specification.

Australia Outlet Traveller Adapter Kit


In-cable, 2-prong Outlet




WS-152A
UK




WS-158A
Africa




WS-154A
Swiss




WS-128
Europe




WS-127
USA



WS-151A
Europe




WS-153A
Italy

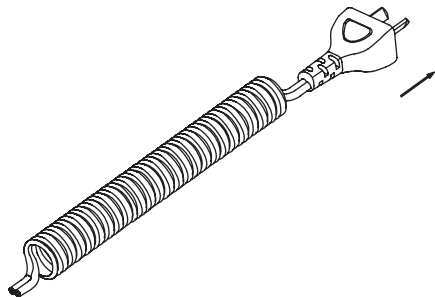


In-cable, 3-prong Outlet

WS-296
2-to-3



WS-295





IEC 320 Sheet E

- **Remark:** Variety of specification is available for other countries or region. Please refer to the engineering drawing for the detailed specification.

Parallel flat Prongs Outlet Traveller Adapter Kit


In-case, International travel 2-prong Outlet, NEMA 5-15R

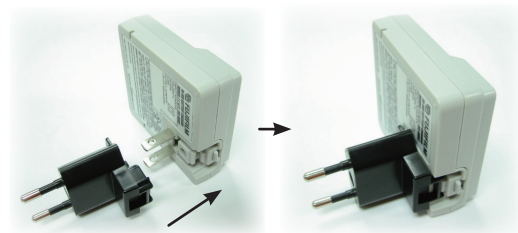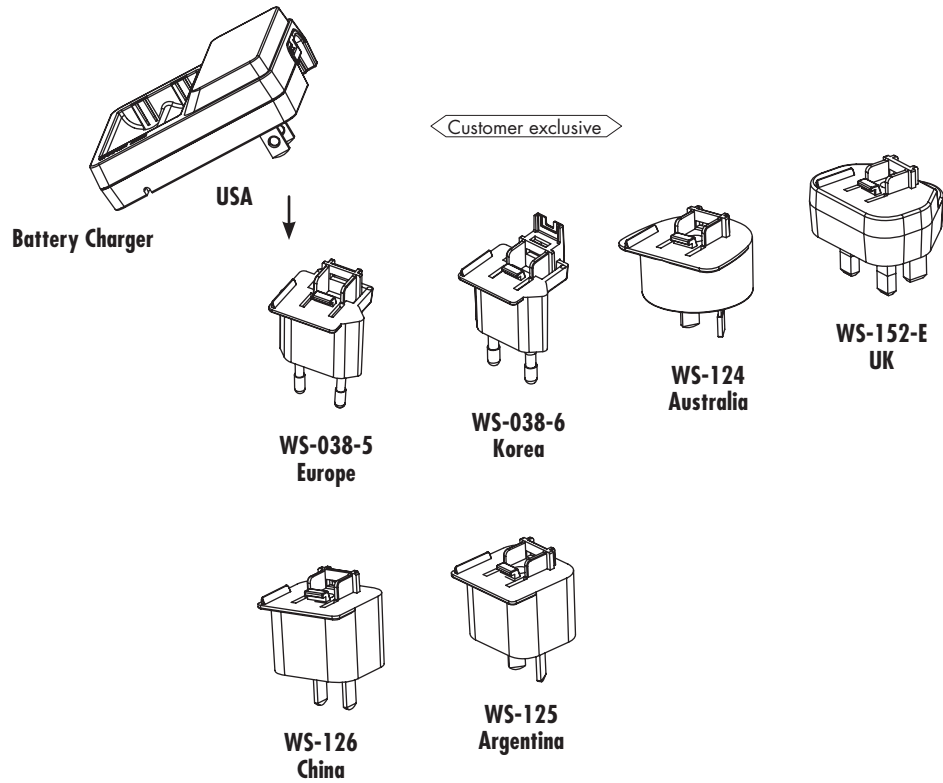


In-cable, International travel 2-prong Outlet, NEMA 1-15R




Straight




WS-323
China




WS-038-1
Europe (Ø4.0 brass)




WS-038-3
Korea (Ø4.8 brass)




WS-038-4
Korea (Ø4.8 brass)




WS-038-7
EU, Ultrasonic weld assembly




WS-038
Europe




WS-038-8
EU, Ultrasonic weld assembly




WS-151
Europe




WS-152
UK (Fused)




WS-152B
UK (without Fused)




WS-105
Australia




WS-115
AUS to EU, US




WS-153
Italy




WS-154
Swiss




Elbow




WS-158
Africa



WS-103
UK




WS-104
South Africa (big)




WS-152-F
UK

Easy-Pull, Safe




Press




Spring out

Straight



WS-127-2
Easy-Pull Smart Adapter Plug




WS-037-2
3 pin to 2pin,
With grounding










▲ Suggestion other adapter plug info : Please refer P4.17~4.18

In-cable, International travel 3-prong Outlet








Straight




Ultrasonic Welding Assembly

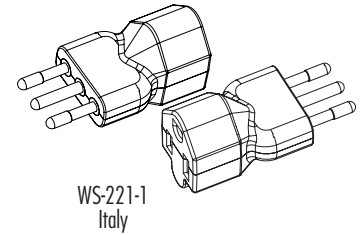








Molded









4.17




Parallel flat Prongs, 2 Pin to 3 Pin with Grounding Line




Parallel flat Prongs, 2 Pin to 3 Pin with Metal Blade Grounding



Easy-Pull, Safe




Press




Spring out


Parallel flat Prongs, 2 Pin to 2 Pin





WS-127-2
Ultrasonic weld assembly
(Polarity)




PATENTED  JET
WS-127-3
Ultrasonic weld assembly




 JET
WS-127-4




 JET
WS-127-5
body: PVC




WS-127-A
Ultrasonic weld assembly



WS-127-B
Ultrasonic weld assembly




WS-127-C
180° rotatable pin




WS-127-E

Parallel flat Prongs, 3 Pin to 2 Pin




WS-037-2
3 pin to 2 pin
With grounding


Parallel flat Prongs, 3 Pin to 3 Pin




WS-037-3
3 pin to 3 pin



WS-037-8
 JET



WS-037-12










WS-037-C
Ultrasonic weld assembly
Under Application  c 


Multifunctional Adapter Plug

IEC Outlet Adapter Plug

IEC 320 SHEET E Inlet








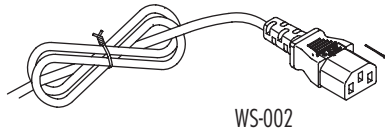


Model No.	Rating	Approval
WS-062	10A 250V	



* Under Application for Approval


IEC 320 C6 Inlet



4.20

Multifunctional Adapter Plug

IEC 320 C8 Inlet

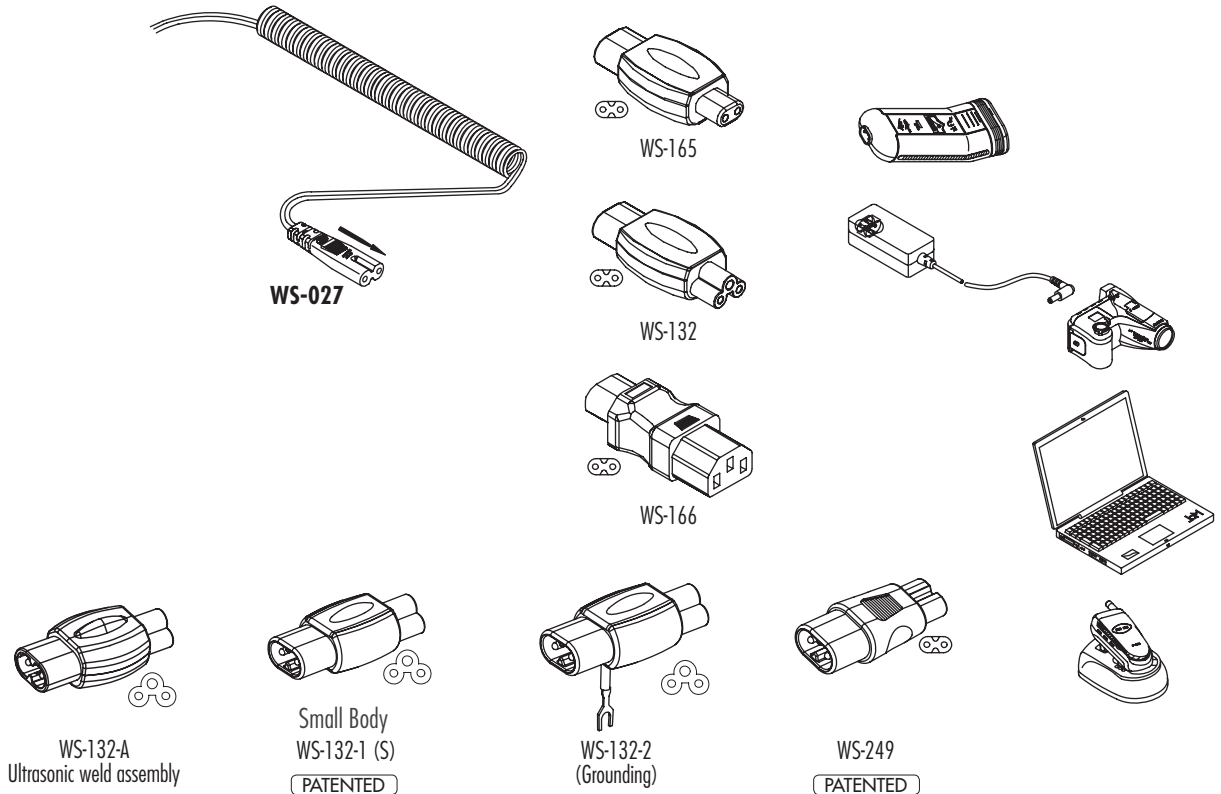

IEC 320 C19 Inlet


Special Design



IEC Outlet Adapter Plug with Touch Switch

- With LED.
- Green Power Adapter with Touch Switch protect your Notebook Battery life.

4.21

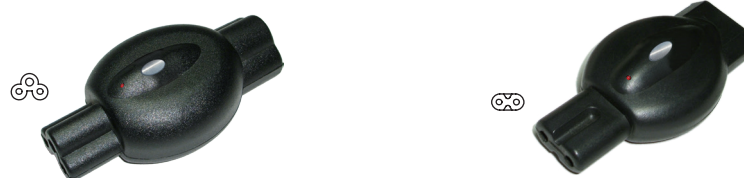


Computer Surge Protect Adapter Plug


IEC 320 SHEET E to C13, 10 AMP, Computer use

- With neon lamp (optional).
- Surge protectors for PC's, Fax Machines, Home & Office equipment.

Straight




WS-215




WS-216
with Neon Lamp



Elbow




WS-217




WS-218
with Neon Lamp



- Normal power supply pattern.



- The effect of an Overvoltage on the normal power supply.




- The effect of a Transient Overvoltage on the normal power supply

- The damage that can be caused by a severe overvoltage.


Multifunctional Adapter Plug

Power Tap


2-pin, 3 outlet




WS-110
180° Rotary pin




WS-110-1
with Neon Lamp




WS-110-5
90° Rotary pin




WS-110-5A
90° Rotary pin




WS-110-2
With Neon Lamp, 180° Rotary pin




WS-110-3
180° Rotary pin



WS-110-4

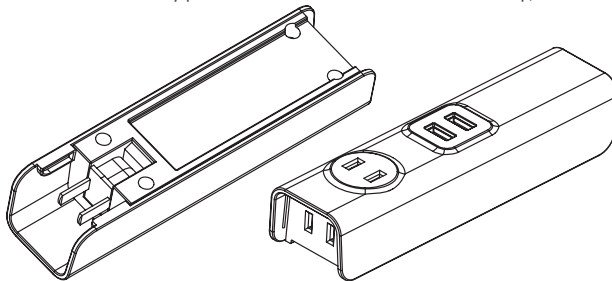

WS-110-22
2*2pin out, 2 port USB Charger
90° Rotatable Plug











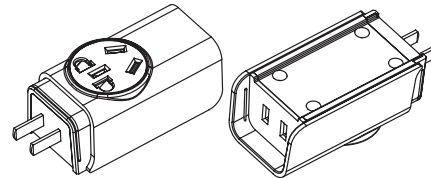


WS-110-23
2*2pin out, 1 3pin out




Multifunctional Adapter Plug


3-pin, 2/3 outlet



NEMA 5-15P to 3 NEMA 5-15R
with locking cover, Metal hook



1 to 3
with locking cover, Metal hook




NEMA 1-15P to 3 NEMA 1-15R
with locking cover, Metal hook


Multifunctional Adapter Plug

Smart Control Adapter series (rotating outlet)


China




WS-417-1
Temperature Control Delay




WS-417-2
Time Control Delay



WS-417-3
Light Control Delay




WS-417-3A
Dark Control Delay



WS-417-4
Sound Control Delay




WS-417-5
Touch Control Delay




WS-417-6
Bluetooth Control + Touch Control Delay


USA, TaiWan, Japan




WS-037-M
Temperature Control Delay




WS-037-N
Time Control Delay




WS-037-P
Light Control Delay



WS-037-P1
Dark Control Delay



WS-037-R
Sound Control Delay




WS-037-S
Touch Control Delay



WS-037-T
Bluetooth Control + Touch Control Delay

Telecontrol Adapter



WS-169-A



WS-37-L

4.25




Multifunctional Adapter Plug


USA Plug In Adapter

Male end-Straight Blade to Female end-Twist Locking


Molded, 15 Ampere, 125 Volts, 2 Pole, 3 Wire Grounding



WS-187
NEMA 5-15P to NEMA L5-15R




Molded, 15 Ampere, 250 Volts, 2 Pole, 3 Wire Grounding



WS-188
NEMA 6-15P to NEMA L6-15R




Molded, 15A to 20A, 125 Volts, 2 Pole, 3 Wire Grounding




WS-187-1
NEMA 5-15P to NEMA L5-20R

Assembly, 15A to 20A, 125 Volts, 2 Pole, 3 Wire Grounding

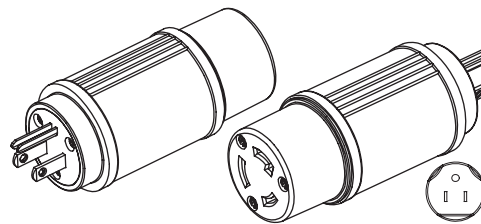


WS-187-C
NEMA 5-15P to NEMA L5-20R

Molded, 15A to 30A, 125 Volts, 2 Pole, 3 Wire Grounding




WS-187-2
NEMA 5-15P to NEMA L5-30R

Assembly, 15A to 30A, 125 Volts, 2 Pole, 3 Wire Grounding

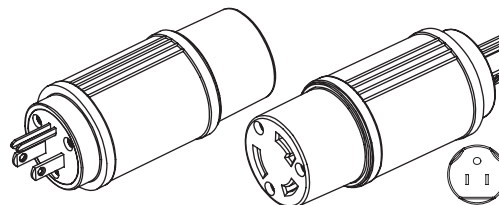


WS-187-D
NEMA 5-15P to NEMA L5-30R


Molded, 20 Ampere, 125 Volts, 2 Pole, 3 Wire Grounding




WS-190
NEMA 5-20P to NEMA L5-20R



Molded, 20 Ampere, 250 Volts, 2 Pole, 3 Wire Grounding




WS-189
NEMA 6-20P to NEMA L6-20R



Multifunctional Adapter Plug

Male end-Straight Blade to Female end-Straight Blade


Molded, 15A to 15A or 20A, 125 Volts, 2 Pole, 3 Wire Grounding



WS-187-3
NEMA 5-15P to NEMA 5-20R


Male end-Twist Locking to Female end-Straight Blade

Molded, 15 Ampere, 125 Volts, 2 Pole, 3 Wire Grounding




WS-191
NEMA L5-15P to NEMA 5-15R

Molded, 15A to 15A or 20A, 125 Volts, 2 Pole, 3 Wire Grounding




WS-191-1
NEMA L5-15P to NEMA 5-20R

Molded, 15 Ampere, 250 Volts, 2 Pole, 3 Wire Grounding




WS-192
NEMA L6-15P to NEMA 6-15R

Molded, 20 Ampere, 125 Volts, 2 Pole, 3 Wire Grounding




WS-194
NEMA L5-20P to NEMA 5-20R

Assembly, 20 Ampere, 125 Volts, 2 Pole, 3 Wire Grounding

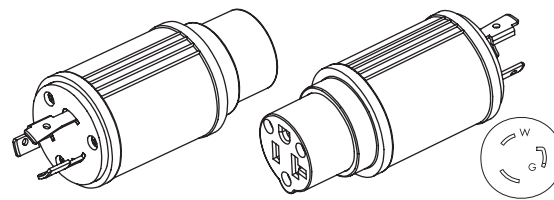


WS-194-D
NEMA L5-20P to NEMA 5-20R

Molded, 20 Ampere, 250 Volts, 2 Pole, 3 Wire Grounding



WS-193
NEMA L6-20P to NEMA 6-20R


Molded, 20A to 20A or 15A, 125 Volts, 2 Pole, 3 Wire Grounding




WS-194-1
NEMA L5-20P to NEMA 5-20R

Multifunctional Adapter Plug


Molded, 30A to 20A or 15A, 125 Volts, 2 Pole, 3 Wire Grounding




Assembly, 30A to 20A or 15A, 125 Volts, 2 Pole, 3 Wire Grounding

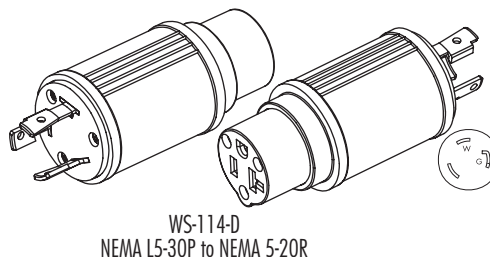

Molded, 20A to 20A or 15A, 250 Volts, 2 Pole, 3 Wire Grounding




Molded, 30A to 20A or 15A, 250 Volts, 2 Pole, 3 Wire Grounding




Male end-Twist Locking to Female end-Twist Locking


Assembly, 20A to 30A, 125 Volts, 2 Pole, 3 Wire Grounding




Assembly, 30A to 20A, 125 Volts, 2 Pole, 3 Wire Grounding



Assembly, 20A, 125/250 Volts, 3 Pole, 4 Wire Grounding




Assembly, 20A to 30A, 125/250 Volts, 3 Pole, 4 Wire Grounding




Multifunctional Adapter Plug

Male end-Twist Locking to Female end-Straight Blade
2 Pole, 3 Wire Grounding Assembly Adapter Plug

30 Ampere to 20 Ampere
125 Voltage to 125 Voltage

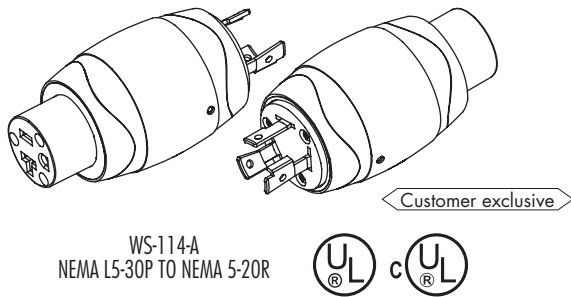


20 Ampere to 20 Ampere
125 Voltage to 125 Voltage

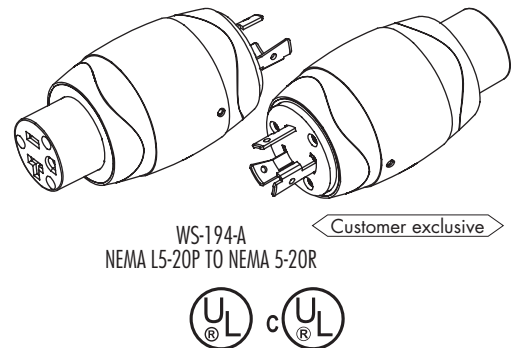


Male end-Straight Blade to Female end-Twist Locking
2 Pole, 3 Wire Grounding Assembly Adapter Plug

15 Ampere to 20 Ampere
125 Voltage to 125 Voltage

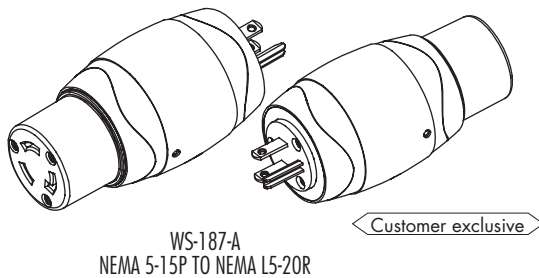


15 Ampere to 30 Ampere
125 Voltage to 125 Voltage

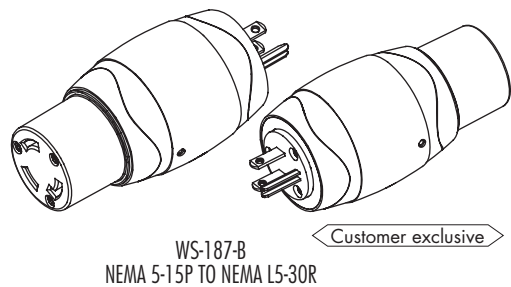


Male end-Twist Locking to Female end-Twist Locking
2 Pole, 3 Wire Grounding Assembly Adapter Plug

30 Ampere to 20 Ampere
125 Voltage to 125 Voltage

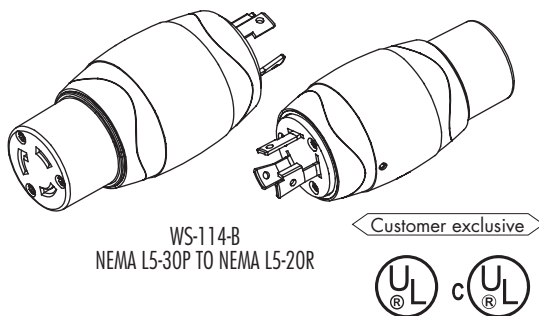

20 Ampere to 30 Ampere
125 Voltage to 125 Voltage

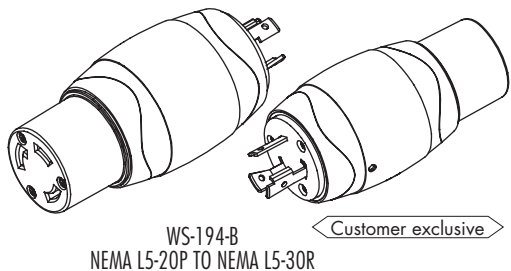


4.29




Multifunctional Adapter Plug

Straight Blade Circuit Guard Portable Plug-in GFCI Adapter,
GFCI Duplex Receptacles, 2 P / 3 W Gnd, Generator Adapter.




WS-076-C
2xNEMA 5-15P to 2xNEMA 5-20R
With GFCI

20 Amp 125 Volts Male end-Straight Blade to 20 Amp, 125/250 Volts Female end-Twist Locking, Assemble
2 Pole, 3 Wire 2 male to one female Grounding Adapter Plug



2 x NEMA 5-20P to NEMA L14-20R




2 x NEMA 5-20P to NEMA L14-20R
with switch




Cover

Molded, 15 Ampere 125 Volts Straight Blade
2 Pole, 3 Wire Grounding, Surge Protect Adapter Plug



EM-020
NEMA 5-15P to NEMA 5-15R

Molded, 15 Ampere 125 Volts Straight Blade
2 Pole, 3 Wire Grounding, Adapter Plug (Load Annunciator)




WS-037-7
NEMA 5-15P to NEMA 5-15R

1. Red indicator light: load.
2. Green indicator light: unload.


4.30

Multifunctional Adapter Plug


Molded, 10 Ampere Male end-IEC 320 SHEET E to 15 Ampere 125 Volts Female end-Straight Blade
2 Pole, 3 Wire Adapter Plug



WS-089
IEC 320 SHEET E to NEMA 5-15R




WS-059
IEC 320 SHEET E to NEMA 5-15R



WS-308
IEC 320 SHEET E to NEMA 5-15R
with screw hole
Customer exclusive


Model No.	Rating	Approval
WS-089	10A 125V	UL

Molded, 2.5 Ampere Male end-IEC 320 C6 to 15 Ampere 125 Volts Female end-Straight Blade
2 Pole, 3 Wire Adapter Plug

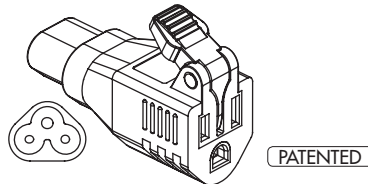


WS-257
IEC 320 C6 to NEMA 5-15R

Molded, 2.5 Ampere Male end-IEC 320 C8 to 15 Ampere 125 Volts Female end-Straight Blade
2 Pole, 2 Wire Adapter Plug



WS-255
IEC 320 C8 to NEMA 5-15R
PATENTED




WS-255-1
Cutdown

Multifunctional Adapter Plug


RV Adapter Plug

Female end-RV to Male end-Straight Blade



2 Pole, 3 Wire Grounding
15 Ampere, 125 Volts AC



2 Pole, 3 Wire Grounding
15 Ampere, 125 Volts AC




2 Pole, 3 Wire Grounding
30 to 20 Ampere, 125 Volts AC

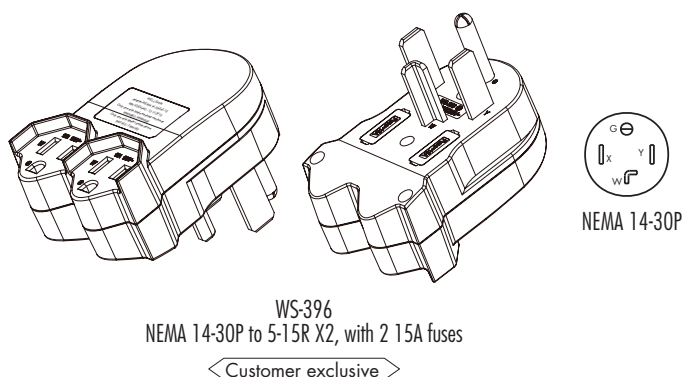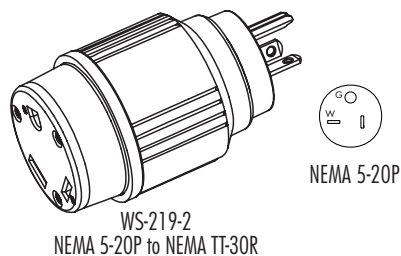


Female end-Straight Blade to male end-RV


2 Pole, 3 Wire Grounding
15 Ampere, 125 Volts AC



2 Pole, 3 Wire Grounding
15 & 20 Ampere, 125 Volts AC




Assembly,
30A 125V to 50A 125/250V

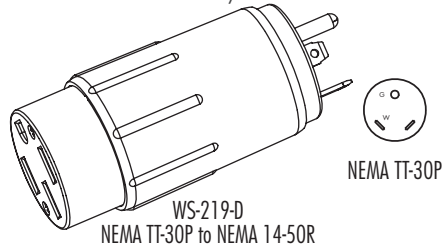


Multifunctional Adapter Plug

Male end-Twist Locking to Female end-RV


Assembly, 20A to 30A, 125 Volts, 2 Pole, 3 Wire Grounding




Assembly, 30A, 125 Volts, 2 Pole, 3 Wire Grounding

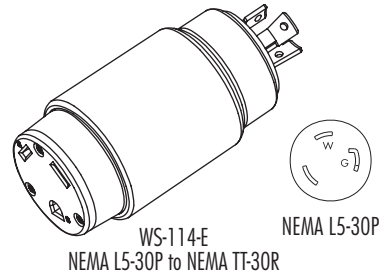

Assembly, 20A 125/250V to 30A 125V

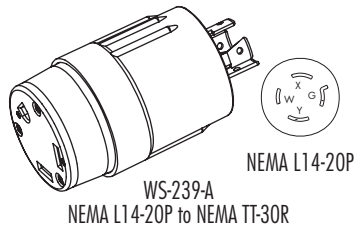


Assembly, 30A 125/250V to 30A 125V




Multifunctional Adapter Plug

Europe Outlet Adapter Plug


Male end-IEC 320 SHEET E Inlet



WS-090
IEC 320 SHEET E to German




WS-060
IEC 320 SHEET E to France




WS-084
IEC 320 SHEET E to Swiss

Male end-IEC 320 C6 Inlet



WS-256
IEC 320 C6 to Europe
PATENTED




WS-256-1
IEC 320 C6 to Europe




Shutter Protection Design




Male end-USA Inlet



WS-180
NEMA 5-15P to German




WS-180-1
NEMA 5-15P to France



WS-230
NEMA 1-15P to UK
Rotatable Pin




Male end-China Inlet



WS-230-1
2P to UK
Rotatable Pin


Multilateral Outlet Adapter Plug

Male end-Israel Inlet



WS-201

Male end-South Africa




WS-202

Multifunctional Adapter Plug


Airplane and Automobile Adapter Plug

Male end-Airplane Inlet




WS-080+081
Airplane to Automobile


Male end-Automobile Inlet

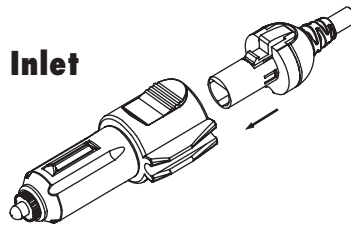

WS-080
Automobile to Airplane



WS-082
Automobile to USA (NEMA 1-15P)

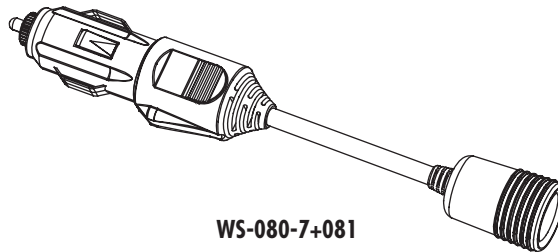


WS-080-7+081


Multifunctional Adapter Plug

OEM Adapter Plugs

USB charger's Adapter.




WS-227-29
Power Charger





WS-351-A
USA




WS-351-B
China



WS-351-D
Europe




WS-351-C
Australia



WS-351-E
UK


Customer exclusive

Palm duckhead.




Rotatable Pin


WS-352-A
US




WS-352-B
SAA




WS-352-C
EU




WS-352-D
UK




WS-352-E
Argentina



WS-352-F
China



Back

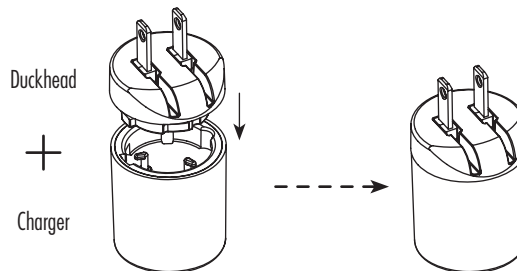


Palm Power Charger



LeTV duckhead.


Customer exclusive

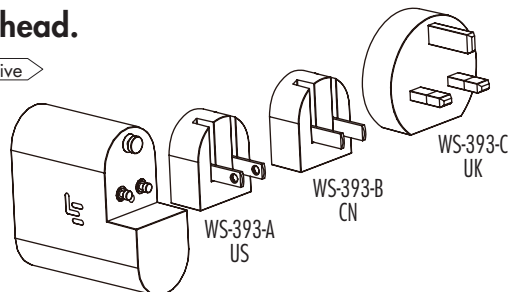


WS-393-C
UK

WS-393-B
CN


WS-393-A
US




WS-443-D
EU




WS-443-A
US




WS-393-C
UK



WS-393-B
CN





WS-393-A
US







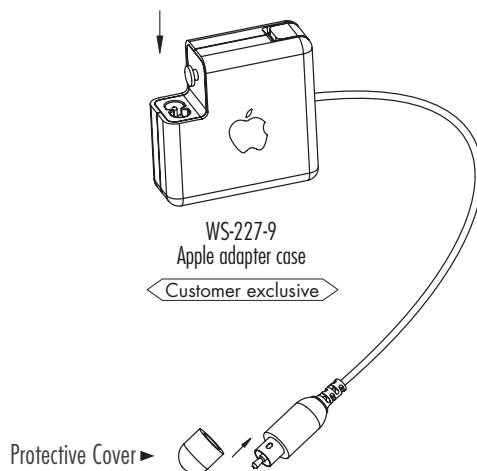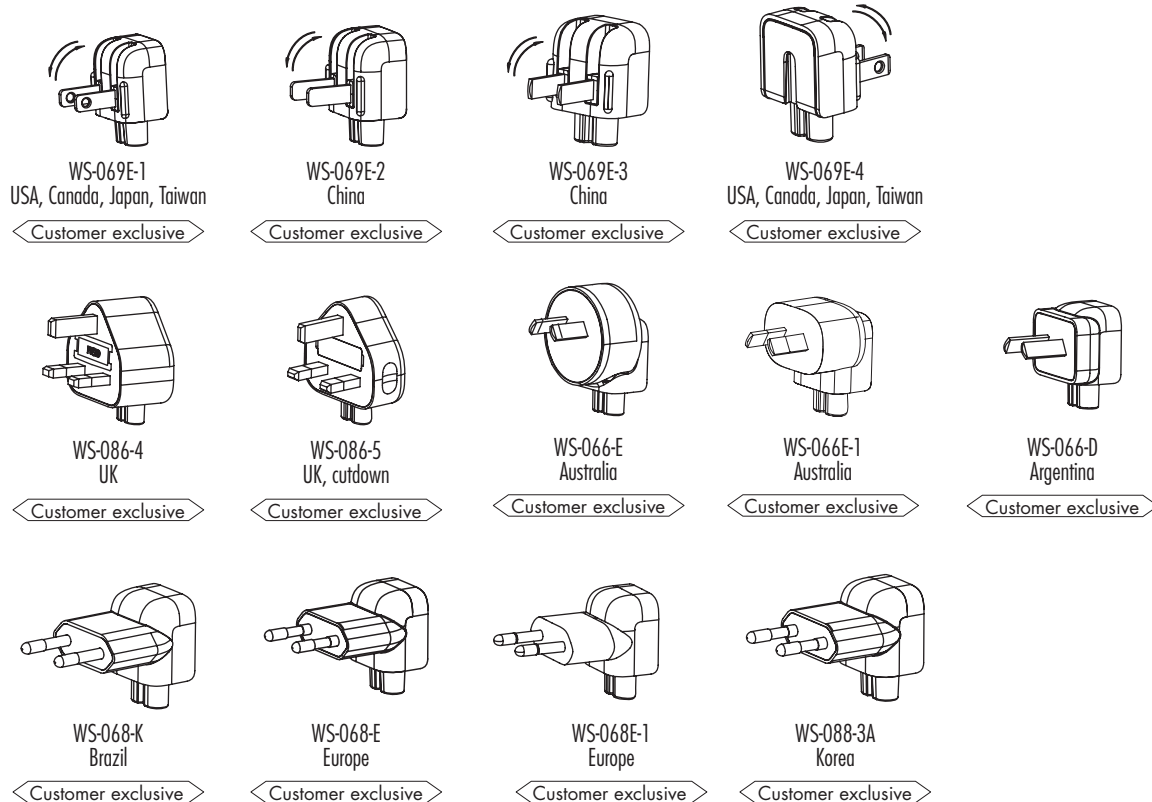

Multifunctional Adapter Plug

OEM for Apple Customer exclusive

2.5A 2-prong Apple World Traveller Power Adapter Kit Elbow, In-case, IEC 320 C7 Outlet






















































































Model No.	Rating	Approval
WS-069E-1	2.5A 125V	
WS-069E-4	2.5A 125V	
	>1-3A 125V	
WS-086-4	2.5A 250V	
WS-066-E	2.5A 250V	
WS-088-3A	2.5A 250V	

4.38

NEMA Straight Blade Configurations























































































NEMA CONFIGURATIONS FOR GENERAL-PURPOSE NONLOCKING PLUGS AND RECEPTACLES

WIRING / VOLTAGE			15 AMPERE		20 AMPERE		30 AMPERE		50 AMPERE		60 AMPERE		
			RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG	
2-POLE 2-WIRE	125V	1	1-15R 	1-15P 									
	250V	2		2-15P 	2-20R 	2-20P 	2-30R 	2-30P 					
	277V AC	3			RESERVED FOR FUTURE CONFIGURATIONS								
	600V	4			RESERVED FOR FUTURE CONFIGURATIONS								
2-POLE 3-WIRE GROUNDING	125V	5	5-15R 	5-15P 	5-20R 	5-20P 	5-30R 	5-30P 	5-50R 	5-50P 			
	250V	6	6-15R 	6-15P 	6-20R 	6-20P 	6-30R 	6-30P 	6-50R 	6-50P 			
	277V AC	7	7-15R 	7-15P 	7-20R 	7-20P 	7-30R 	7-30P 	7-50R 	7-50P 			
	347V AC	24	24-15R 	24-15P 	24-20R 	24-20P 	24-30R 	24-30P 	24-50R 	25-50P 			
	480V AC	8			RESERVED FOR FUTURE CONFIGURATIONS								
	600V	9			RESERVED FOR FUTURE CONFIGURATIONS								
3-POLE 3-WIRE	125/250V	10			10-20R 	10-20P 	10-30R 	10-30P 	10-50R 	10-50P 			
	3Ø 250V	11	11-15R 	11-15P 	11-20R 	11-20P 	11-30R 	11-30P 	11-50R 	11-50P 			
	3Ø 480V	12			RESERVED FOR FUTURE CONFIGURATIONS								
	3Ø 600V	13			RESERVED FOR FUTURE CONFIGURATIONS								
3-POLE 4-WIRE GROUNDING	125/250V	14	14-15R 	14-15P 	14-20R 	14-20P 	14-30R 	14-30P 	14-50R 	14-50P 	14-60R 	14-60P 	
	3Ø 250V	15	15-15R 	15-15P 	15-20R 	15-20P 	15-30R 	15-30P 	15-50R 	15-50P 	15-60R 	15-60P 	
	3Ø 480V	16			RESERVED FOR FUTURE CONFIGURATIONS								
	3Ø 600V	17			RESERVED FOR FUTURE CONFIGURATIONS								
4-POLE 4-WIRE	3ØY 120/208V	18	18-15R 	18-15P 	18-20R 	18-20P 	18-30R 	18-30P 	18-50R 	18-50P 	18-60R 	18-60P 	
	3ØY 277/480V	19			RESERVED FOR FUTURE CONFIGURATIONS								
	3ØY 347/600V	20			RESERVED FOR FUTURE CONFIGURATIONS								
4-POLE 5-WIRE GROUNDING	3ØY 120/208V	21			RESERVED FOR FUTURE CONFIGURATIONS								
	3ØY 277/480V	22			RESERVED FOR FUTURE CONFIGURATIONS								
	3ØY 347/600V	23			RESERVED FOR FUTURE CONFIGURATIONS								

Technical Information



NEMA Locking Configurations

NEMA CONFIGURATIONS FOR LOCKING TYPE PLUGS AND RECEPTACLES

WIRING / VOLTAGE			15 AMPERE		20 AMPERE		30 AMPERE	
			RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG
2-POLE 2-WIRE	125V	L1	L1-15R 	L1-15P 				
	250V	L2			L2-20R 	L2-20P 		
	277V AC	L3			RESERVED FOR FUTURE CONFIGURATIONS			
	600V	L4			RESERVED FOR FUTURE CONFIGURATIONS			
2-POLE 3-WIRE GROUNDING	125V	L5	L5-15R 	L5-15P 	L5-20R 	L5-20P 	L5-30R 	L5-30P 
	250V	L6	L6-15R 	L6-15P 	L6-20R 	L6-20P 	L6-30R 	L6-30P 
	277V AC	L7	L7-15R 	L7-15P 	L7-20R 	L7-20P 	L7-30R 	L7-30P 
	347V AC	L24			L24-20R 	L24-20P 		
	480V AC	L8			L8-20R 	L8-20P 	L8-30R 	L8-30P 
	600V AC	L9			L9-20R 	L9-20P 	L9-30R 	L9-30P 
3-POLE 3-WIRE	125/250V	L10			L10-20R 	L10-20P 	L10-30R 	L10-30P 
	3Ø 250V	L11	L11-15R 	L11-15P 	L11-20R 	L11-20P 	L11-30R 	L11-30P 
	3Ø 480V	L12			L12-20R 	L12-20P 	L12-30R 	L12-30P 
	3Ø 600V	L13					L13-30R 	L13-30P 
3-POLE 4-WIRE GROUNDING	125/250V	L14			L14-20R 	L14-20P 	L14-30R 	L14-30P 
	3Ø 250V	L15			L15-20R 	L15-20P 	L15-30R 	L15-30P 
	3Ø 480V	L16			L16-20R 	L16-20P 	L16-30R 	L16-30P 
	3Ø 600V	L17					L17-30R 	L17-30P 
4-POLE 4-WIRE	3ØY 120/208V	L18			L18-20R 	L18-20P 	L18-30R 	L18-30P 
	3ØY 277/480V	L19			L19-20R 	L19-20P 	L19-30R 	L19-30P 
	3ØY 347/600V	L20			L20-20R 	L20-20P 	L20-30R 	L20-30P 
4-POLE 5-WIRE GROUNDING	3ØY 120/208V	L21			L21-20R 	L21-20P 	L21-30R 	L21-30P 
	3ØY 277/480V	L22			L22-20R 	L22-20P 	L22-30R 	L22-30P 
	3ØY 347/600V	L23			L23-20R 	L23-20P 	L23-30R 	L23-30P 



• We gained Safety Standard approval of different country

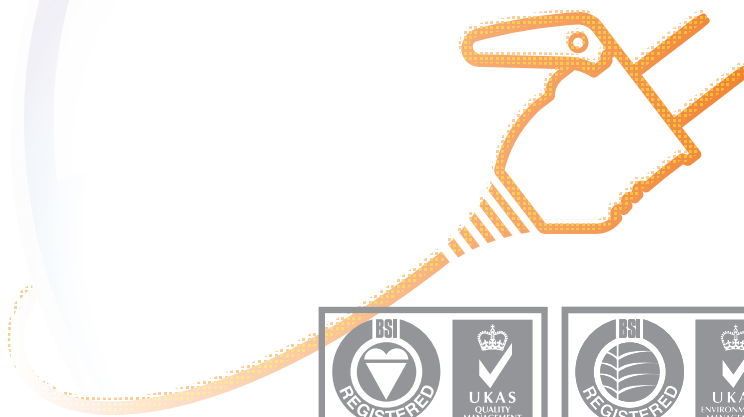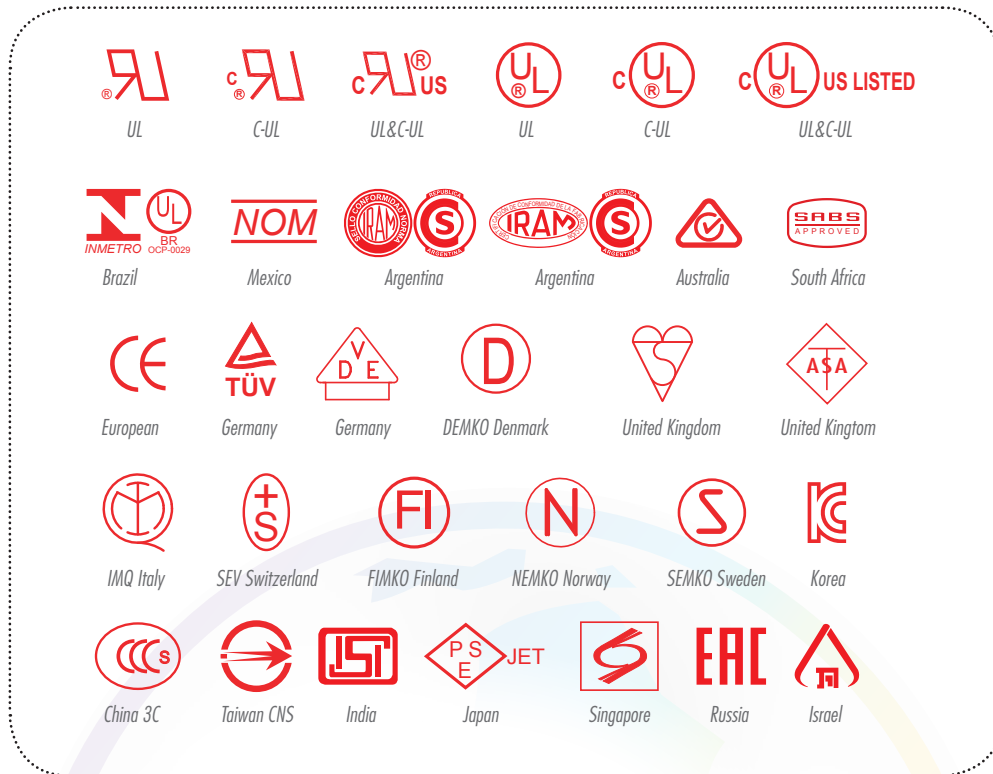

Quality Manufacturer and Green Partner
Awarded Sony Green Partner Certification in 2005.



Well Shin Technology Co., Ltd.

Well Shin (Taiwan) Factory
Well Shin Electronics (KunShan) Co., Ltd.
Dong Guan Well Shin Electronic Products Co., Ltd.



Headquarter



Taiwan Plant



Dongguan Plant



Kun Shan Plant (Shanghai Area)

維熹科技股份有限公司

Well Shin Technology Co., Ltd.

臺北市內湖區新湖三路196號

No.196, Xinghu 3rd Rd., Neihu District,

Taipei City 114, Taiwan

TEL: 886-2-2791-1119 FAX: 886-2-2791-9901

台灣工廠

Taiwan Plant

彰化縣福興鄉麥厝村沿海路一段1號

N1, Sec.1, Yen Hai Rd., Mai Tsuo Chun,

Fu Hsing Hsiang, Chang Hwa 50645, Taiwan

Tel: 886-4-770-3081 Fax: 886-4-770-3080

東莞維升電子製品有限公司

Dongguan Well Shin Electronic Products Co., Ltd.

廣東省東莞市黃江鎮長龍管理區

Chang Long Control Dist., Hwang Jiang Cheng,

Dongguan City, Guangdong 523766, China

TEL: 86-769-8362-2694 FAX: 86-769-8362-2714

維爾斯電子(昆山)有限公司

Well Shin Electronic (Kun Shan) Co., Ltd.

江蘇省昆山市錦溪鎮昆開路389號

No.389, Kun Kai Rd., Jin Xi Town,

Kun Shan City, Jiang Su 215324, China

TEL: 86-512-5722-9101 FAX: 86-512-5722-9105